



DATA SHEET		Date	19-Jun-25
Model	PDA300F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

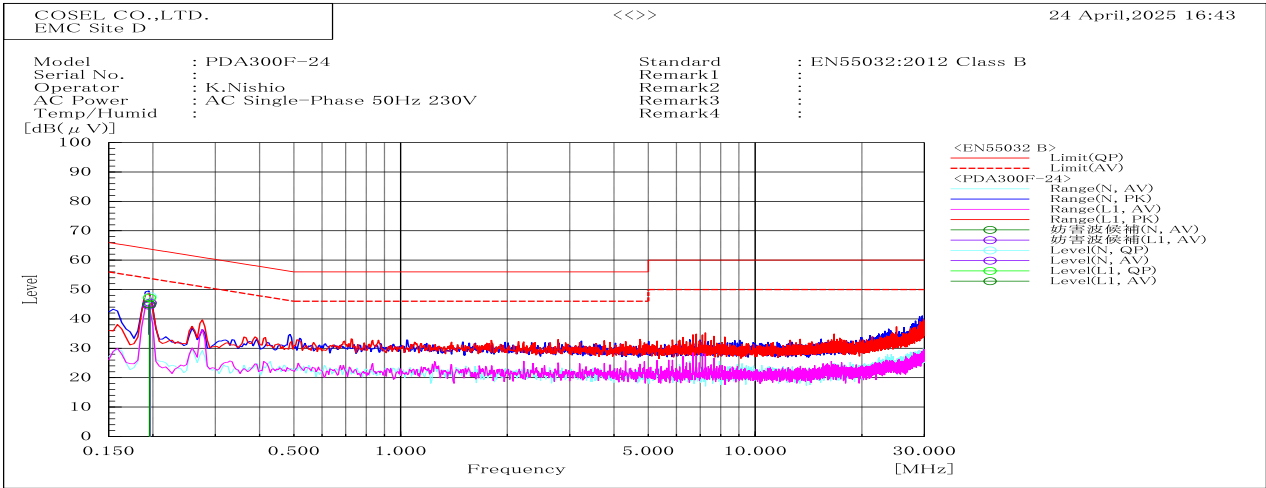


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.197	N	47.7	45.5	63.8	53.8	16.1	8.3	Pass	
0.196	L1	47.2	45	63.8	53.8	16.6	8.8	Pass	

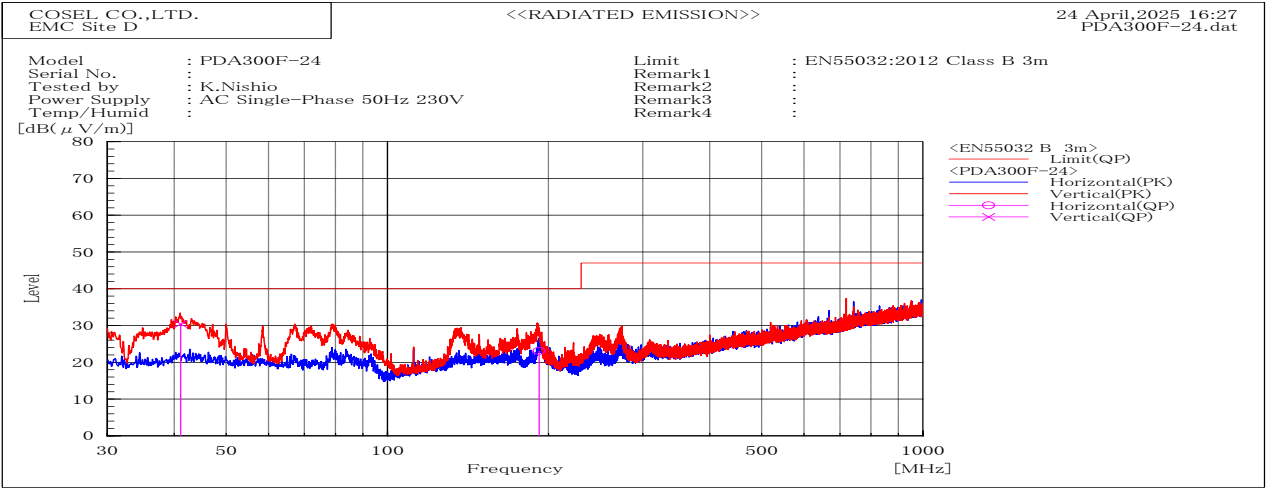


Frequency MHz	Polarization	Stability	Level dB(uV/m)	Limit dB(uV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
41.112	V	Stable	30.4	40	9.6	Pass	100	36.3	
192.013	H	Stable	23.1	40	16.9	Pass	199.7	227.3	

DATA SHEET		Date	19-Jun-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

1. Line conduction

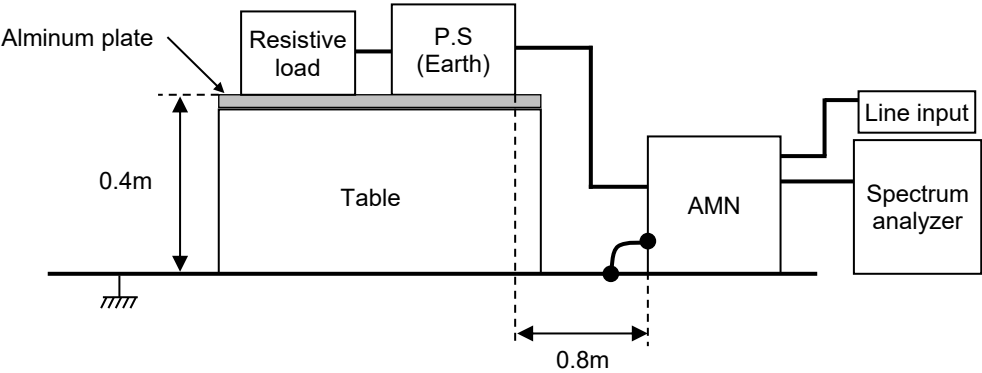

2. Radiated emission

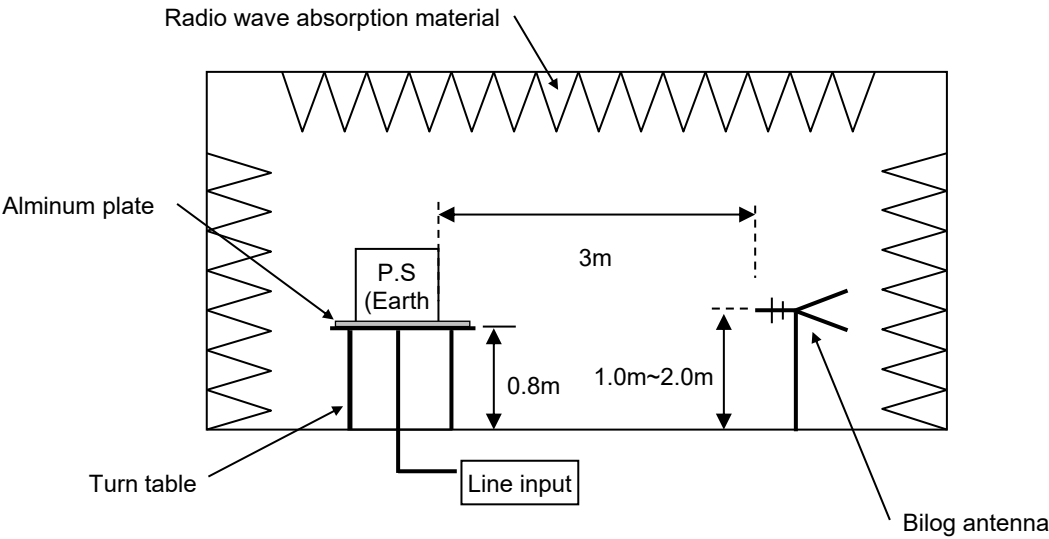

Conditions

Test : EMI
Model Nam: PDA300F-24

1.LINE CONDUCTION



2.RADIATED EMISSION

