



DATA SHEET		Date	19-Jun-25
Model	PDA300F-36	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

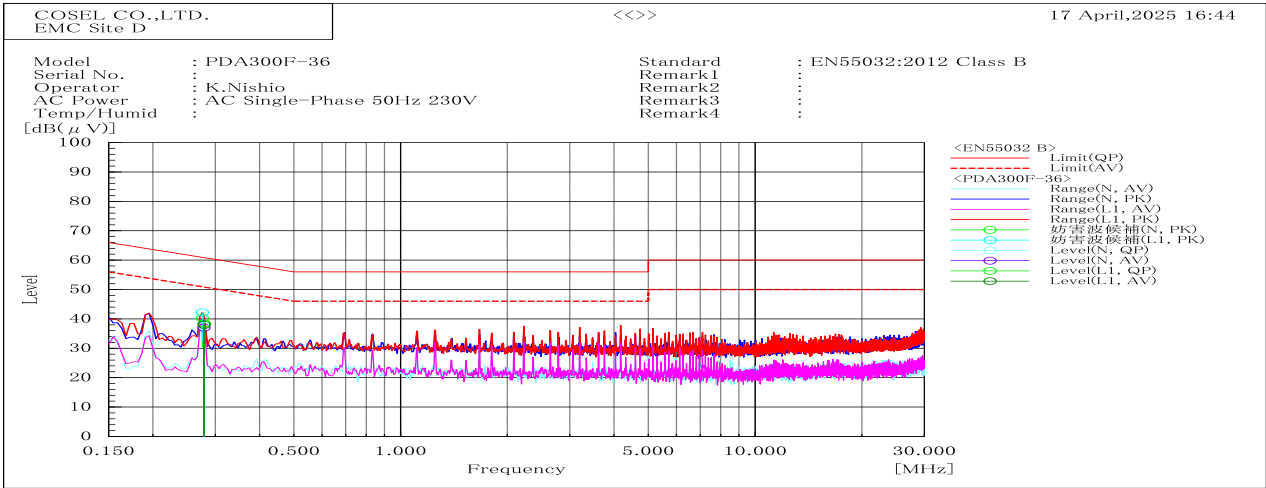


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.279	L1	38.5	38	60.8	50.8	22.3	12.8	Pass	
0.279	N	37.6	37	60.9	50.9	23.3	13.9	Pass	

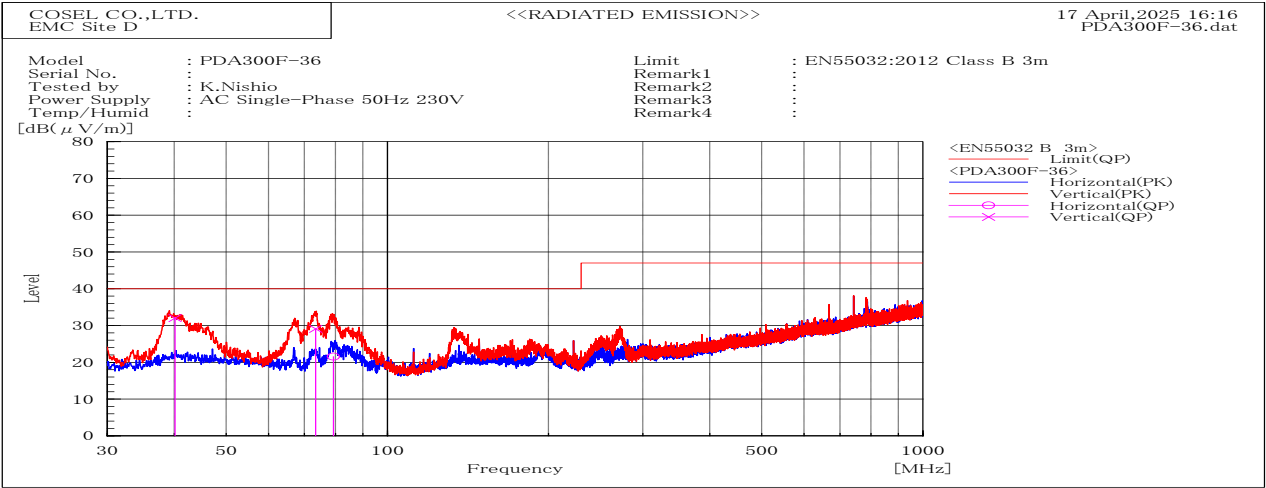


Frequency MHz	Polarization	Stability	Level dB(uV/m)	Limit dB(uV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
73.492	V	Stable	29.1	40	10.9	Pass	100	206.5	
40.14	V	Stable	32	40	8	Pass	100	252.1	
79.298	H	Stable	21.5	40	18.5	Pass	197.6	323.2	

DATA SHEET		Date	19-Jun-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

1. Line conduction

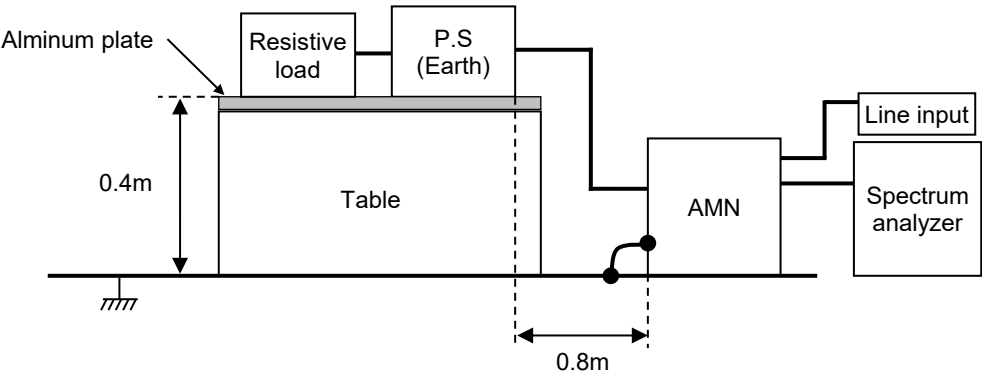

2. Radiated emission

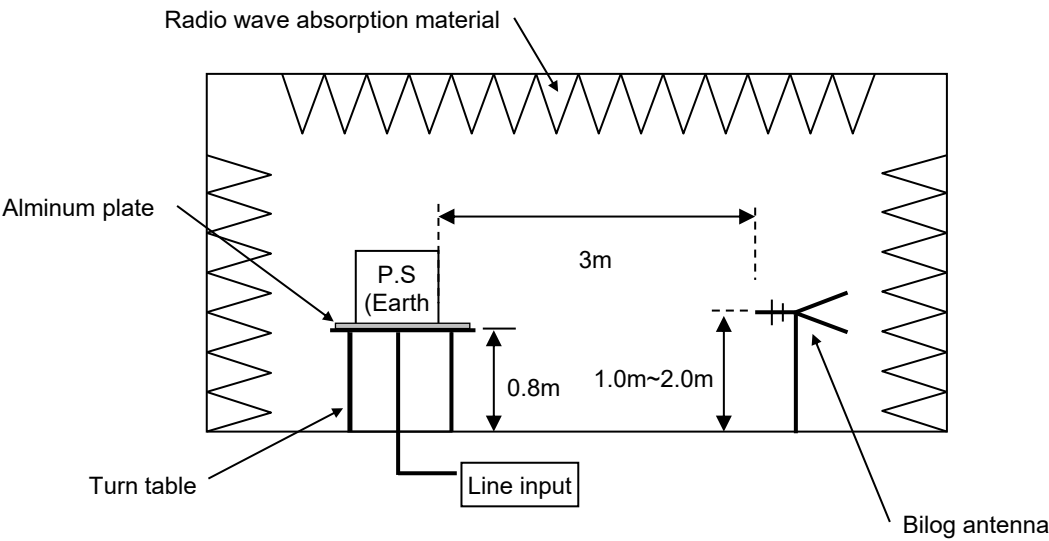

Conditions

Test : EMI
Model Nam: PDA300F-36

1.LINE CONDUCTION



2.RADIATED EMISSION

