



DATA SHEET		Date	28-Nov-25
Model	PDA300F-3R3	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Yoshioka

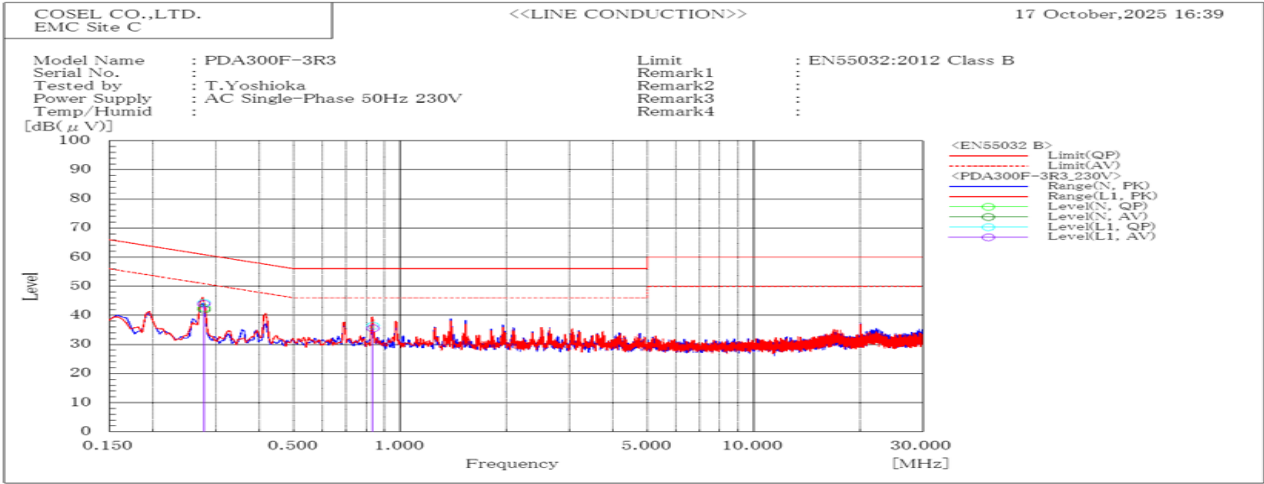


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.278	L1	44.4	43.9	60.9	50.9	16.5	7	Pass	
0.836	L1	36.4	35.5	56	46	19.6	10.5	Pass	
0.279	N	42.5	42	60.9	50.9	18.4	8.9	Pass	

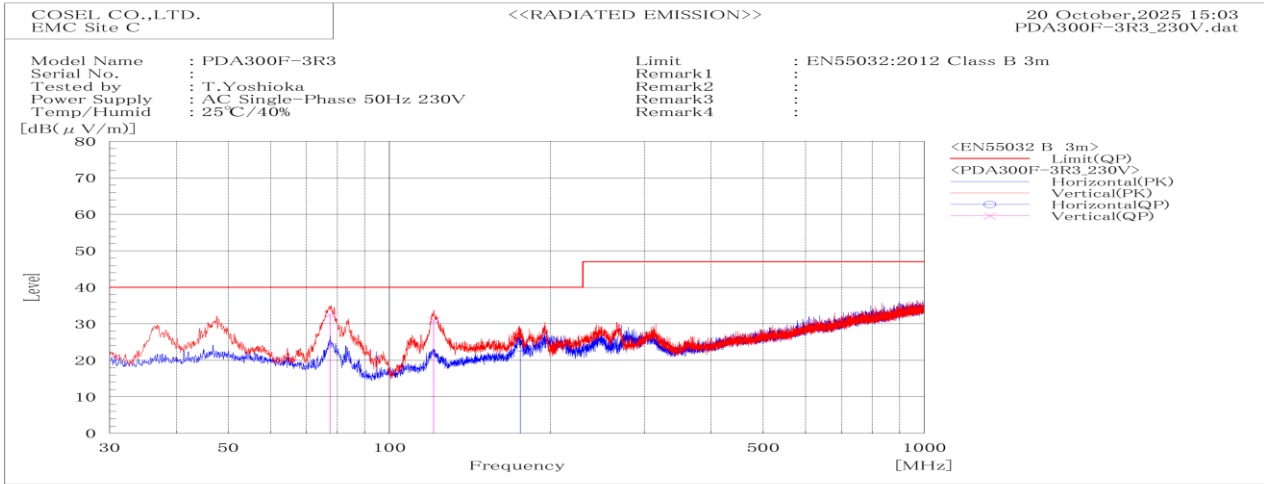


Frequency MHz	Polarization	Stability	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
175.569	H	Stable	23.4	40	16.6	Pass	200	100	
77.452	V	Stable	32.5	40	7.5	Pass	101.6	324.8	
121.101	V	Stable	30.9	40	9.1	Pass	124.1	49	

DATA SHEET		Date	28-Nov-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Yoshioka

1. Line conduction

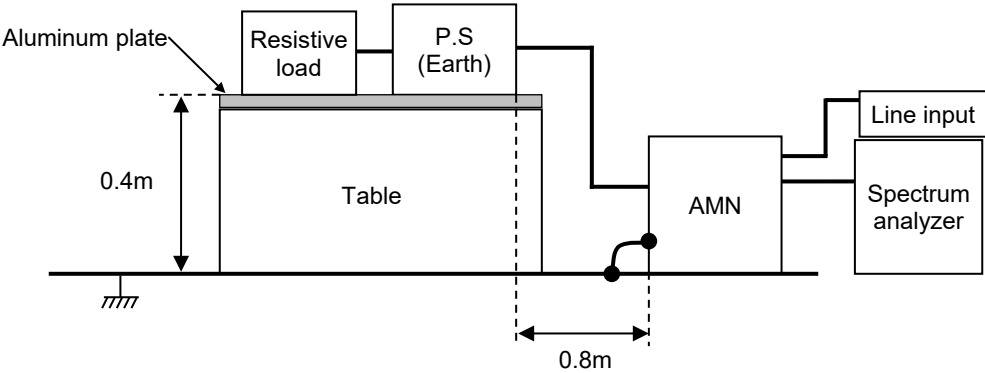

2. Radiated emission

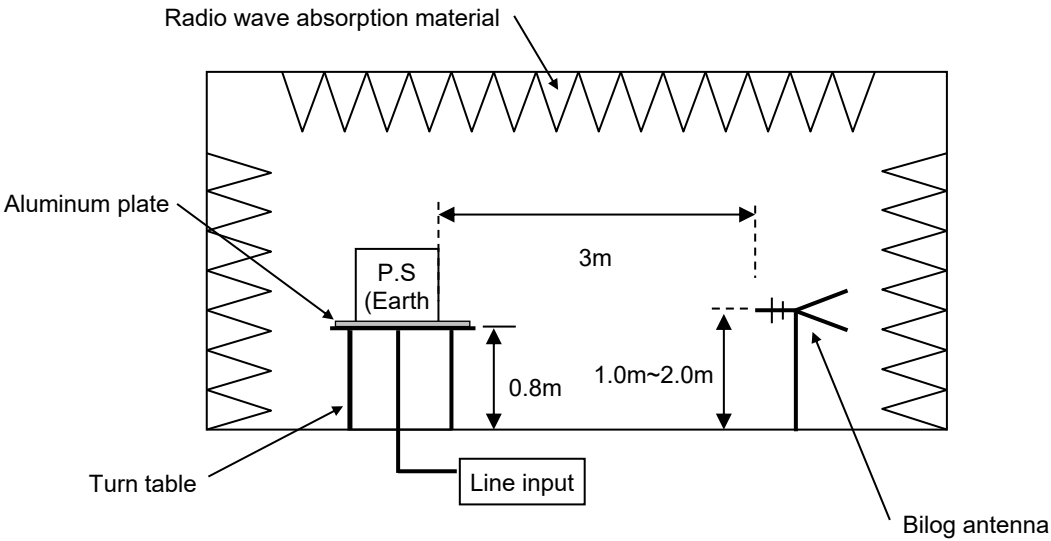

Conditions

Test : EMI
Model Nam: PDA300F-3R3

1.LINE CONDUCTION



2.RADIATED EMISSION

