



DATA SHEET		Date	19-Jun-25
Model	PDA300F-48	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

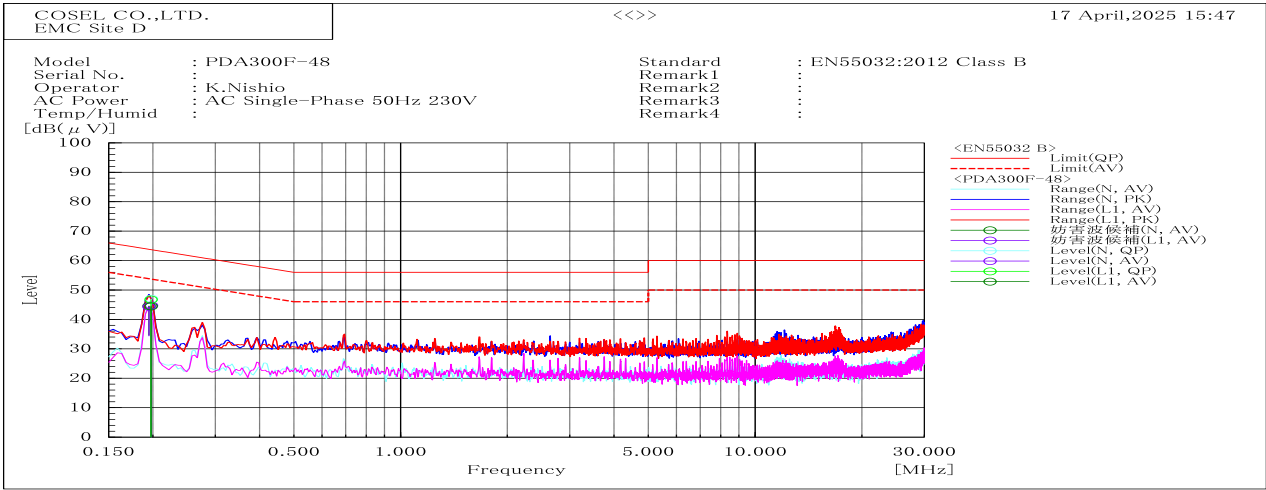


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.198	N	47	44.7	63.7	53.7	16.7	9	Pass	
0.198	L1	46.8	44.4	63.7	53.7	16.9	9.3	Pass	

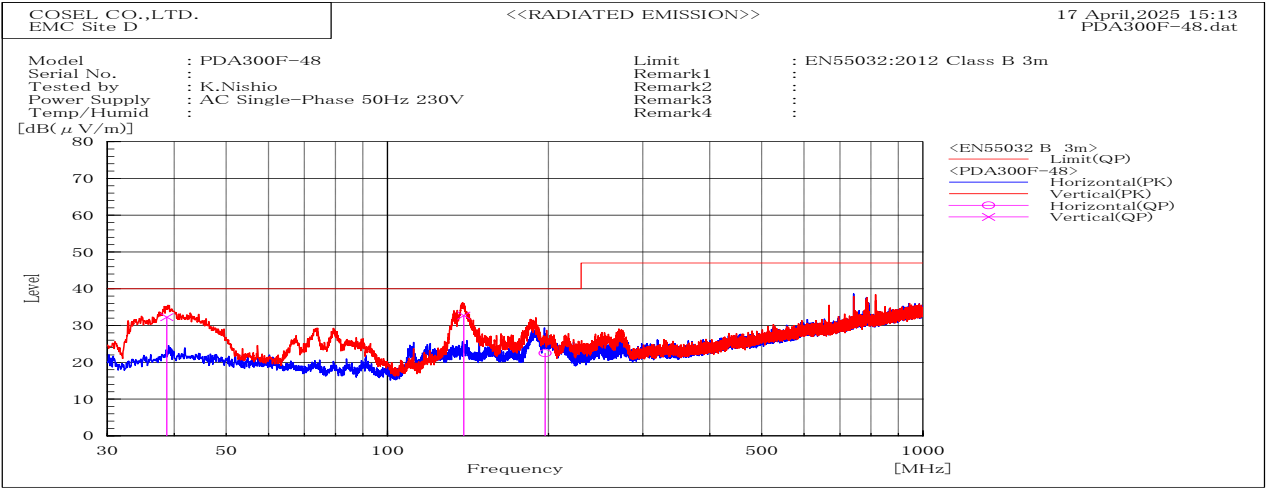


Frequency MHz	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(uV/m) QP	dB(uV/m) QP	dB QP				
138.893	V	Stable	32.7	40	7.3	Pass	100.2	347.6	
38.737	V	Stable	32.3	40	7.7	Pass	100.4	358.6	
197.067	H	Stable	22.5	40	17.5	Pass	199.7	337.5	

DATA SHEET		Date	19-Jun-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

1. Line conduction

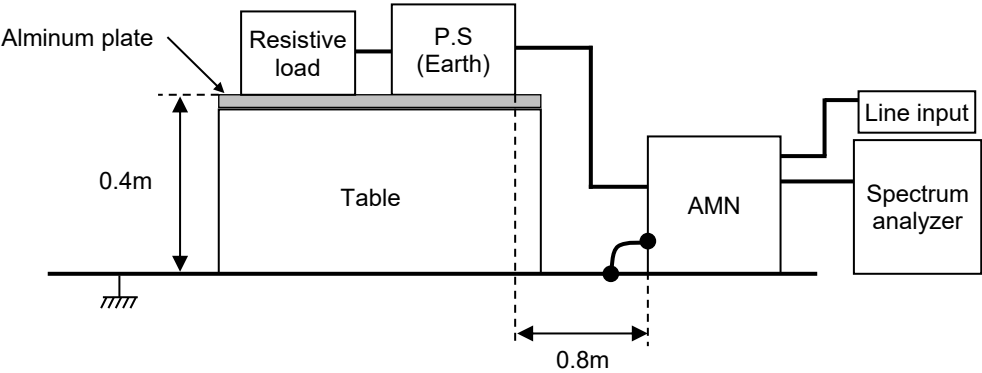

2. Radiated emission

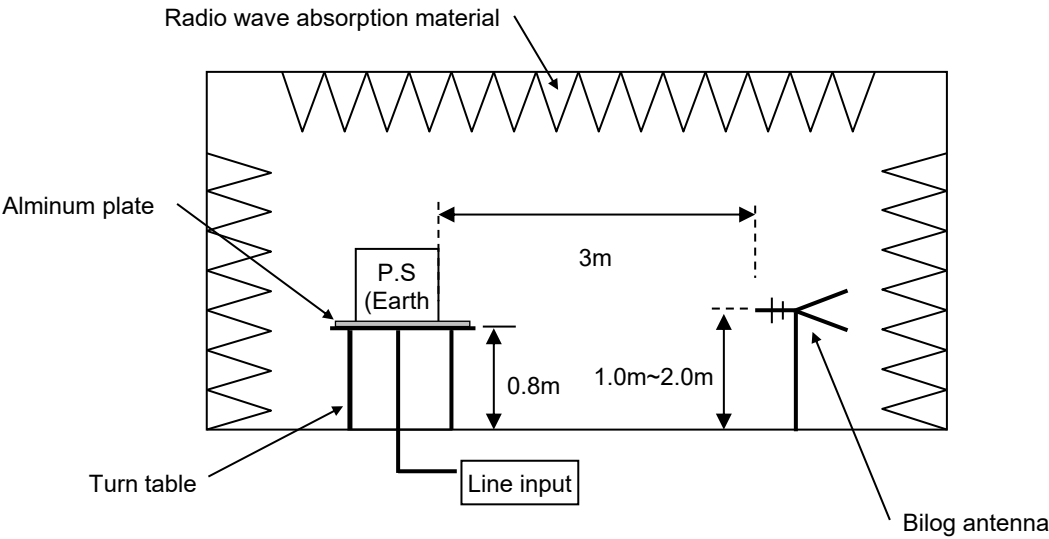

**Conditions**

Test : EMI  
Model Nam: PDA300F-48

**1.LINE CONDUCTION**



**2.RADIATED EMISSION**

