



DATA SHEET			Date	28-Nov-25
Model	PDA300F-5		Temp.	25 degreeC
Test	EMI		Humid.	40 %RH
	Line conduction & Radiated emission		Tested by	T.Yoshioka

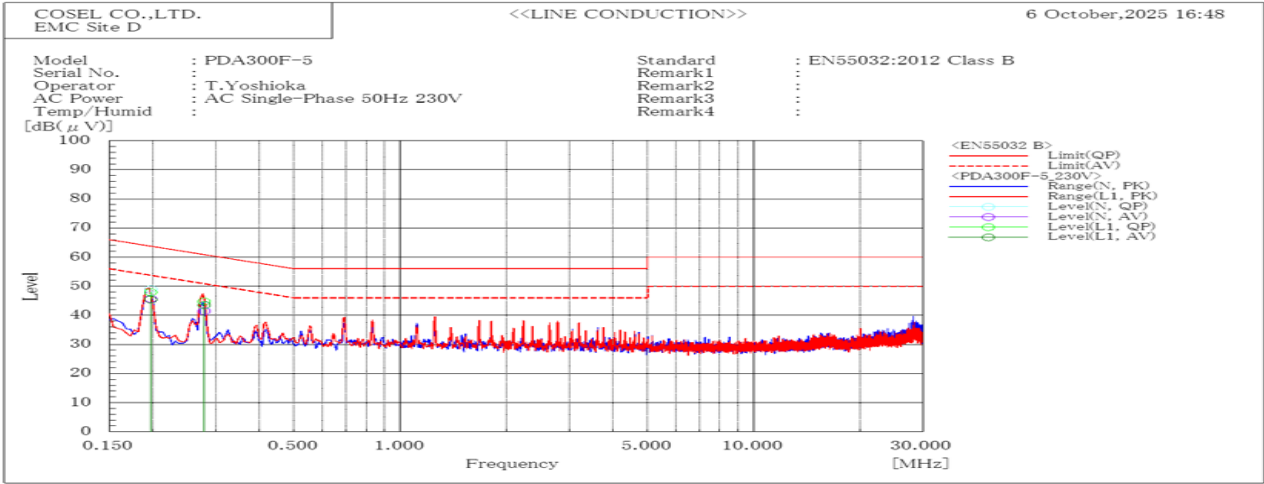


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.196	L1	48	45.4	63.8	53.8	15.8	8.4	Pass	
0.279	L1	44.7	43.6	60.9	50.9	16.2	7.3	Pass	
0.197	N	49	45.7	63.8	53.8	14.8	8.1	Pass	
0.279	N	43.4	41.5	60.9	50.9	17.5	9.4	Pass	

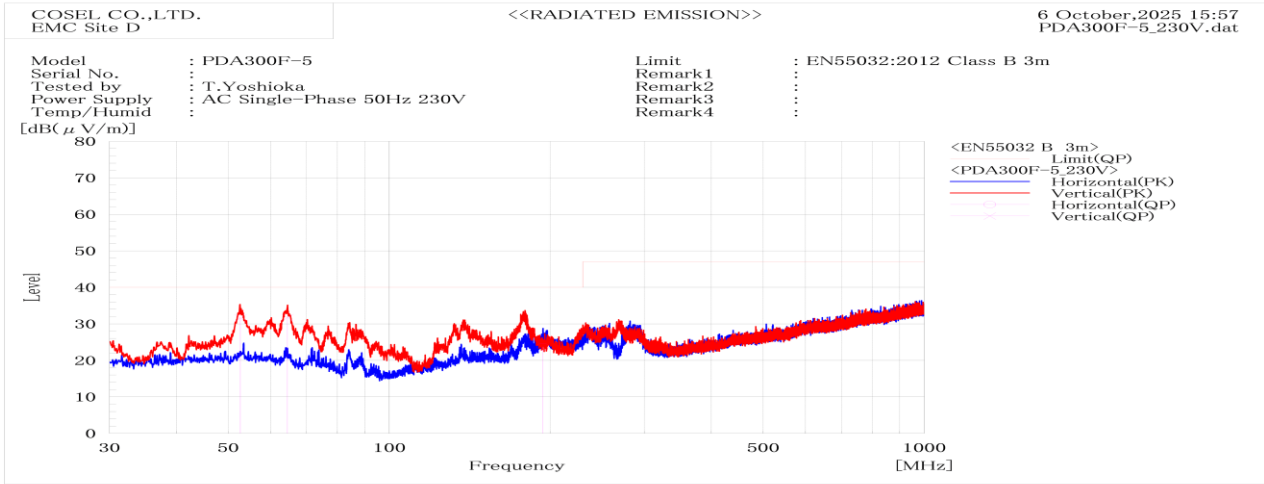


Frequency MHz	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(uV/m) QP	dB(uV/m) QP	dB QP				
52.721	V	Stable	31.6	40	8.4	Pass	100.3	42.6	
64.543	V	Stable	31.7	40	8.3	Pass	100.6	357.6	
193.539	H	Stable	23.7	40	16.3	Pass	183.5	140.7	

DATA SHEET		Date	28-Nov-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Yoshioka

1. Line conduction

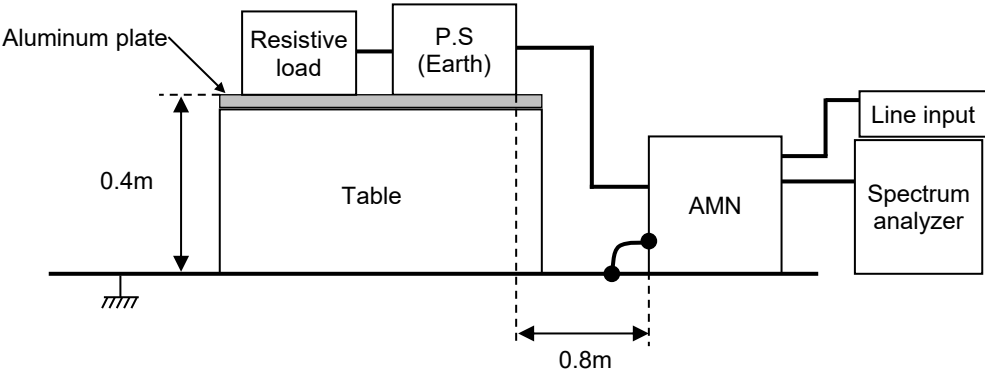

2. Radiated emission

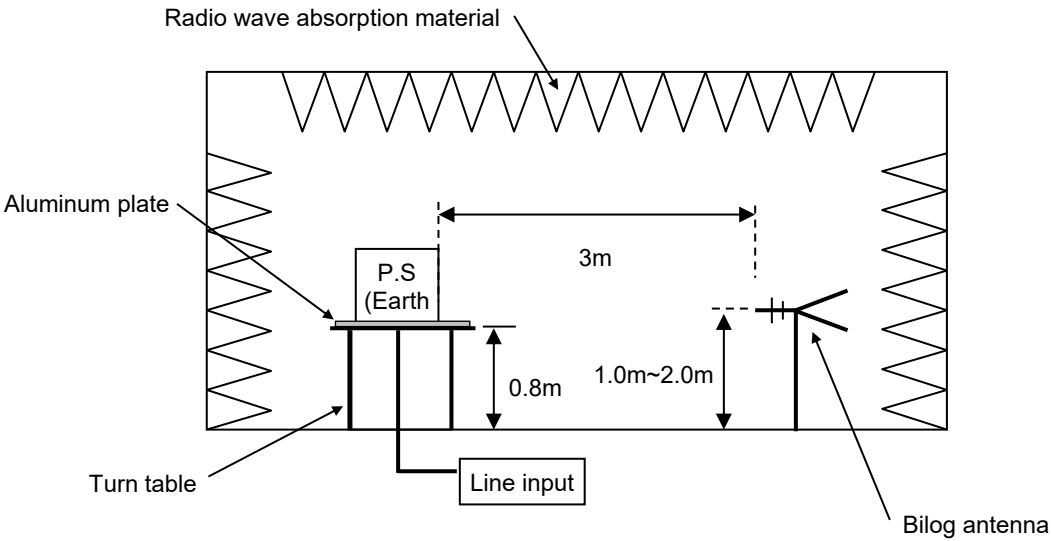

**Conditions**

Test : EMI  
Model Nam: PDA300F-5

**1.LINE CONDUCTION**



**2.RADIATED EMISSION**

