



DATA SHEET		Date	08-Oct-25
Model	PDA30F-15	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	K.Nishio

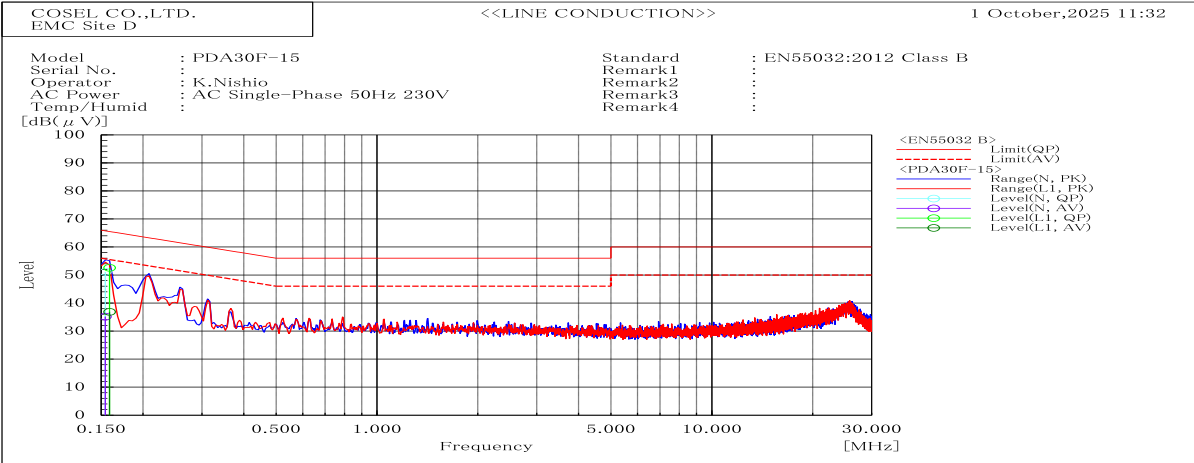


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.154	N	51.1	35.2	65.8	55.8	14.7	20.6	Pass	
0.159	L1	52.6	36.9	65.5	55.5	12.9	18.6	Pass	

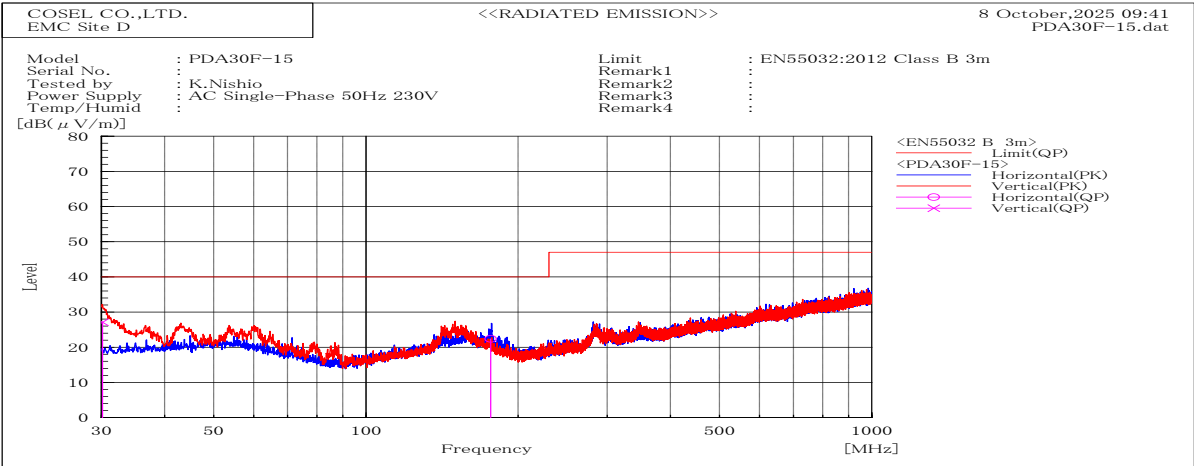


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP		QP				
176.44	H	Stable	22.4	40	17.6	Pass	198.4	191.4		
30.138	V	Stable	27.1	40	12.9	Pass	100.2	351.7		

DATA SHEET		Date	08-Oct-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	K.Nishio

1. Line conduction

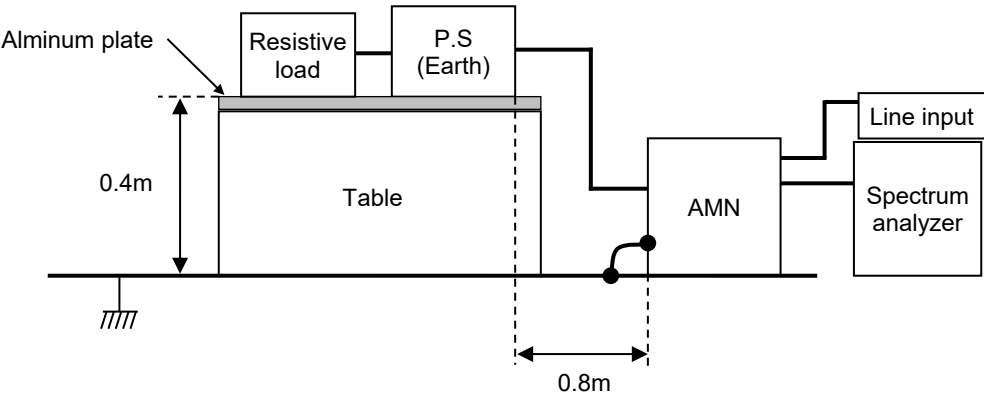



2. Radiated emission

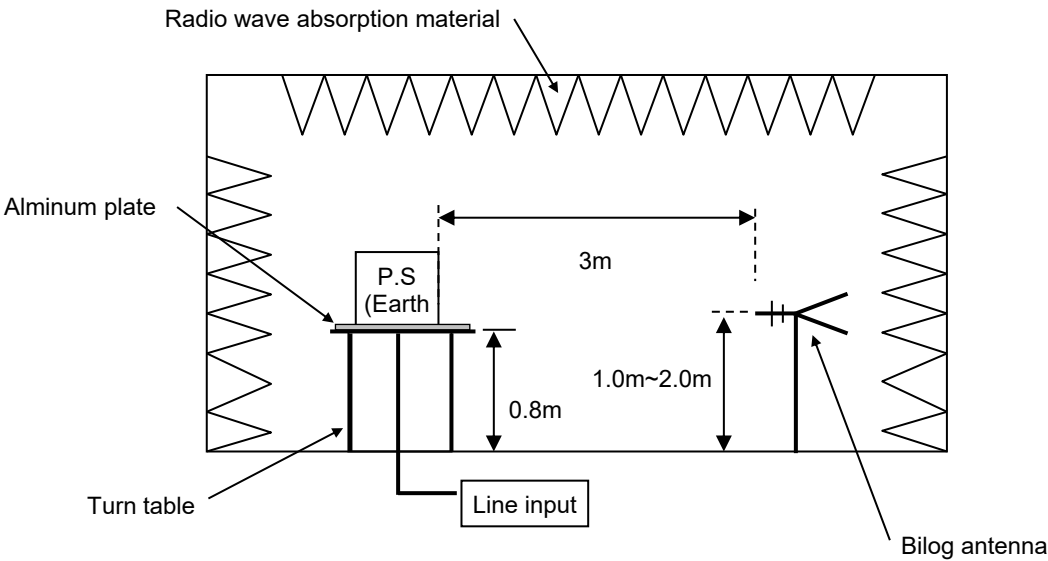

Conditions

Test : EMI
Model Name : PDA30F-15

1.LINE CONDUCTION

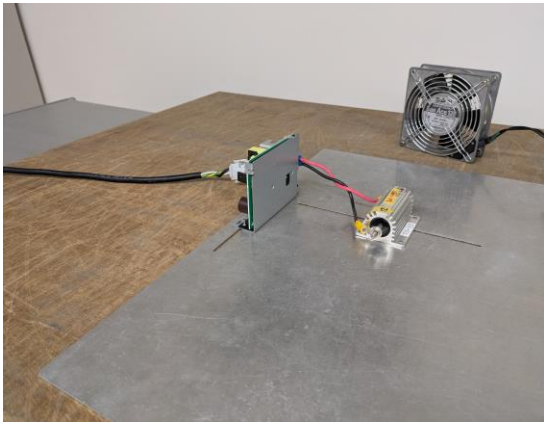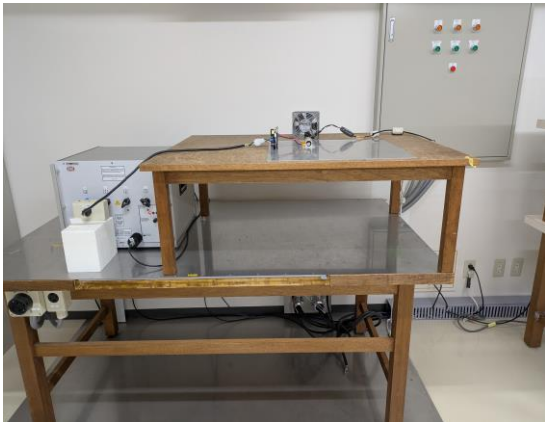

2.RADIATED EMISSION

