



DATA SHEET		Date	08-Oct-25
Model	PDA30F-3R3	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

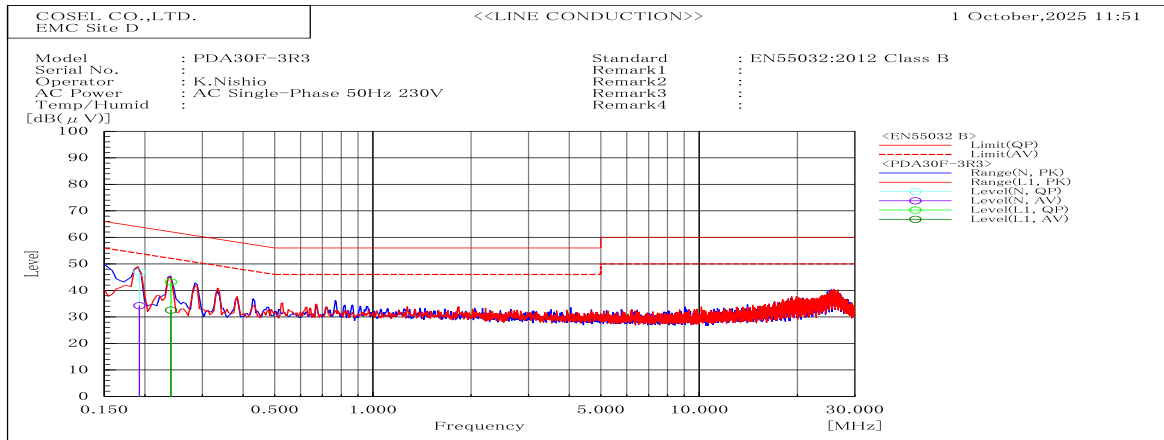


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.24	L1	43.2	32.6	62.1	52.1	18.9	19.5	Pass	
0.193	N	46.9	34.3	63.9	53.9	17	19.6	Pass	

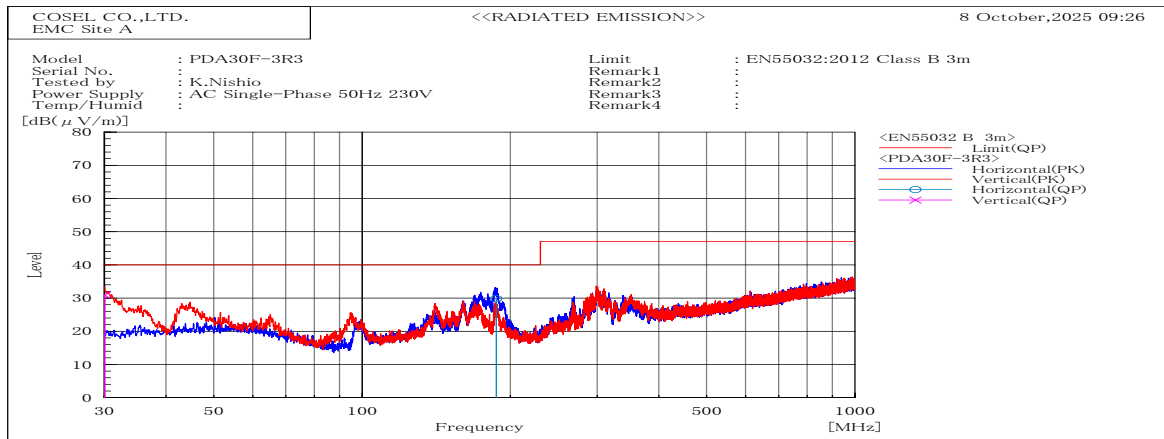


Frequency MHz	Polarization	Stability	Level dB(μV/m)		Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP		QP				
187.188	H	Stable	29.8	40	10.2	Pass	198.3	351.1		
30.043	V	Stable	30.9	40	9.1	Pass	100.2	320.9		

DATA SHEET		Date	08-Oct-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

1. Line conduction

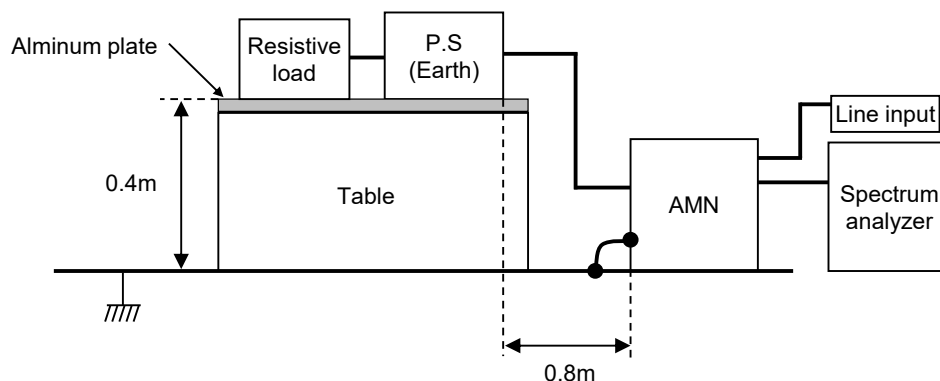


2. Radiated emission

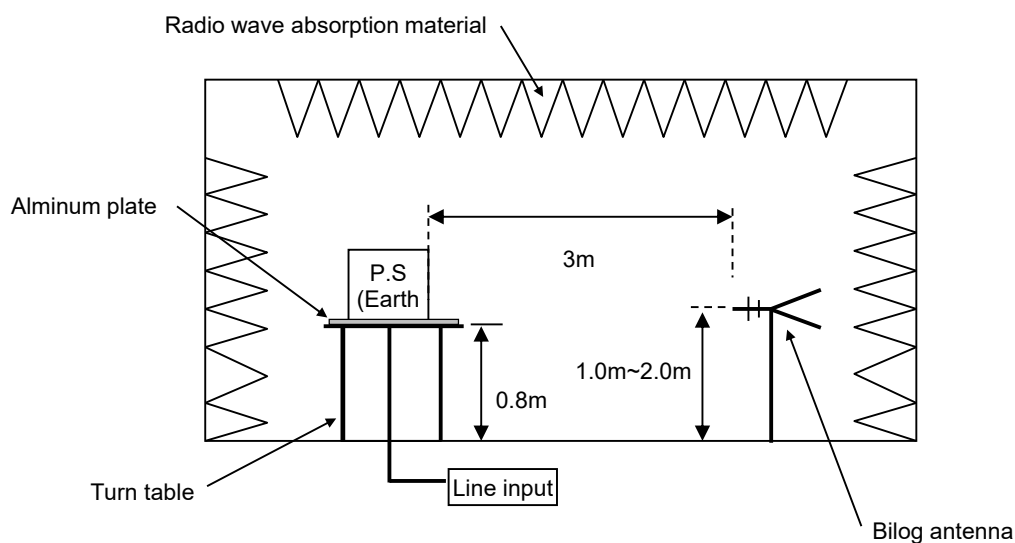

Conditions

Test : EMI
Model Name : PDA30F-3R3

1.LINE CONDUCTION

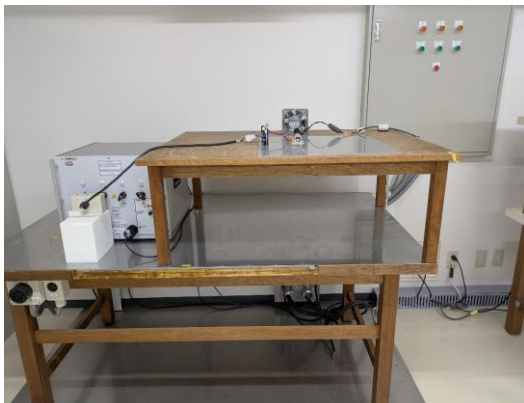

2.RADIATED EMISSION

