



DATA SHEET		Date	08-Nov-25
Model	PDA50F-15	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	H.Ota

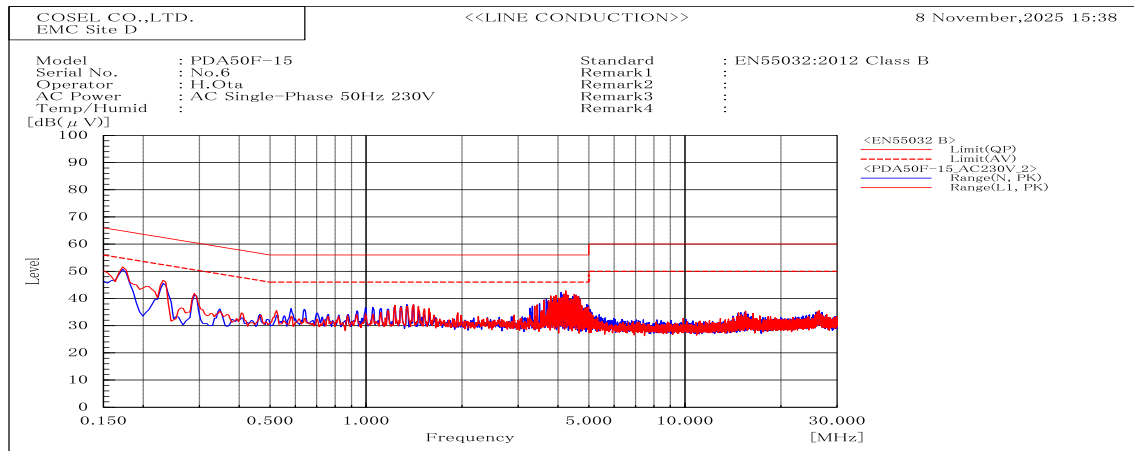

Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
-	L,N	-	-	-	-	>10	>10	Pass	


※The minimum margin exceeds 10 dB, indicating no issue, so we omitted the detailed measurement.

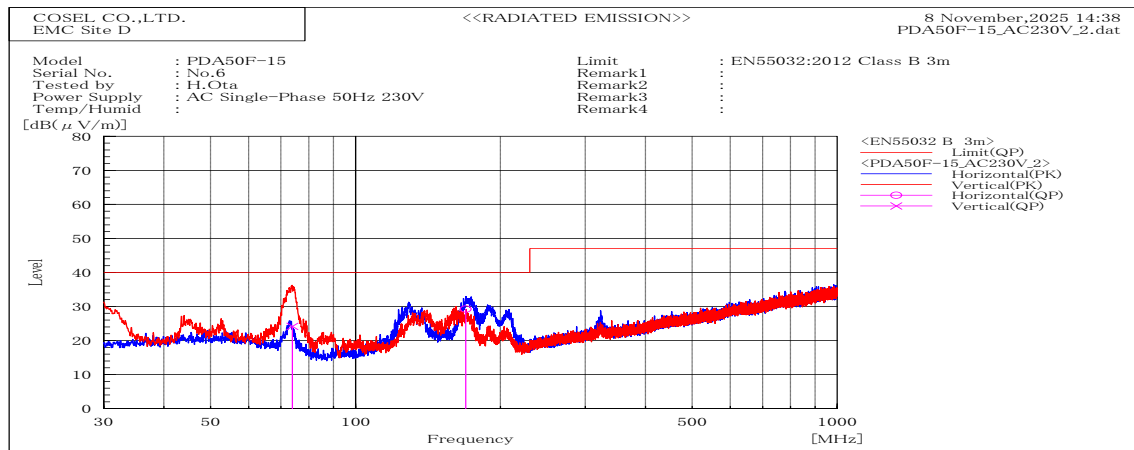


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB				
			QP	QP	QP		cm	deg	
73.919	V	Stable	24.2	40	15.8	Pass	100	357.5	
169.289	H	Stable	29.2	40	10.8	Pass	200	20.6	

DATA SHEET		Date	08-Nov-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	H.Ota

1. Line conduction

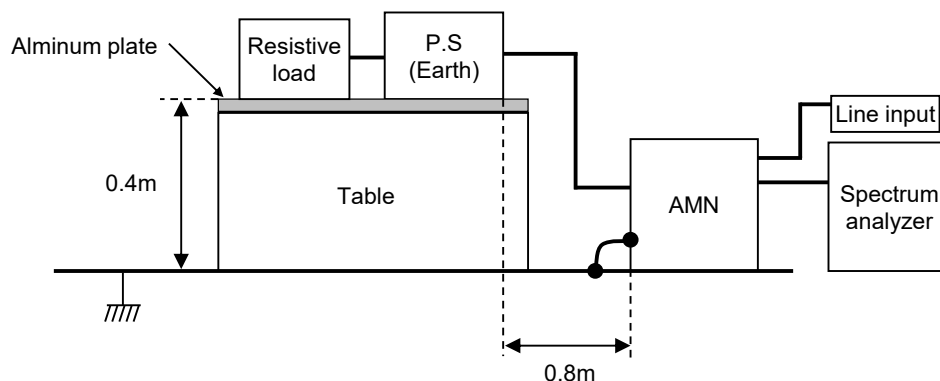


2. Radiated emission

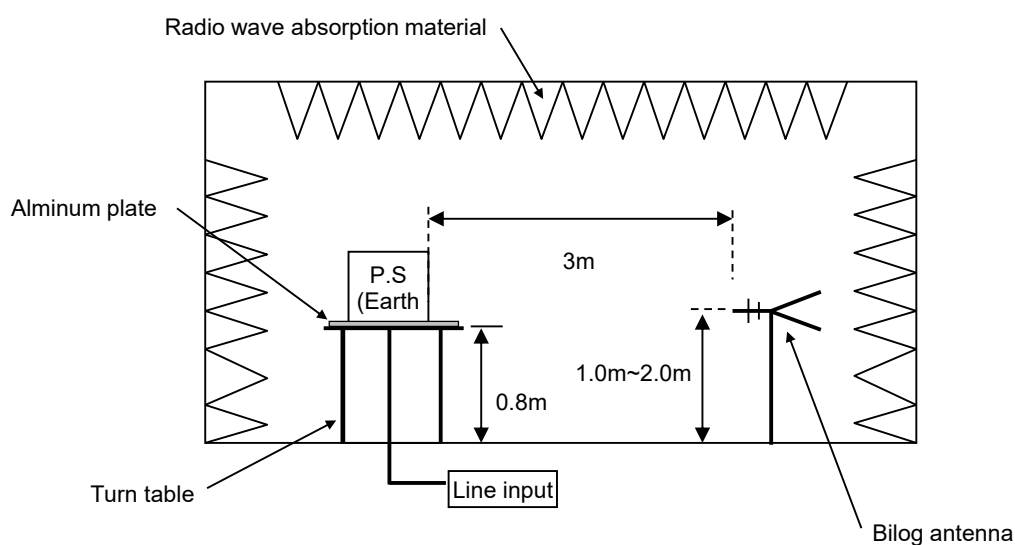

Conditions

Test : EMI
Model Name : PDA50F-15

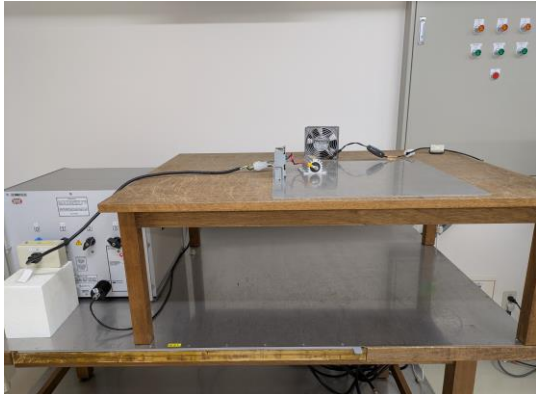1.LINE CONDUCTION**2.RADIATED EMISSION**