



DATA SHEET		Date	14-Oct-25
Model	PDA50F-48	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	H.Ota

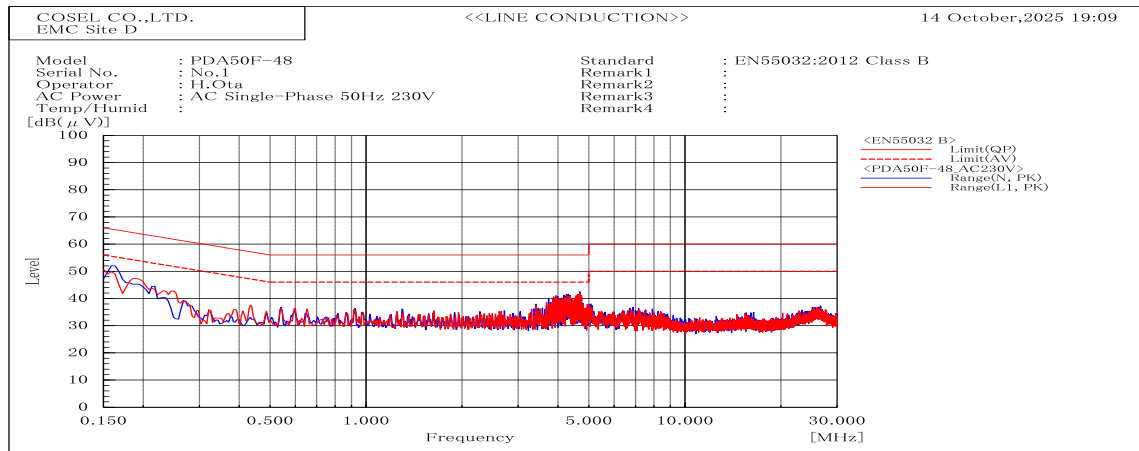

Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
-	L,N	-	-	-	-	>10	>10	Pass	


※The minimum margin exceeds 10 dB, indicating no issue, so we omitted the detailed measurement.

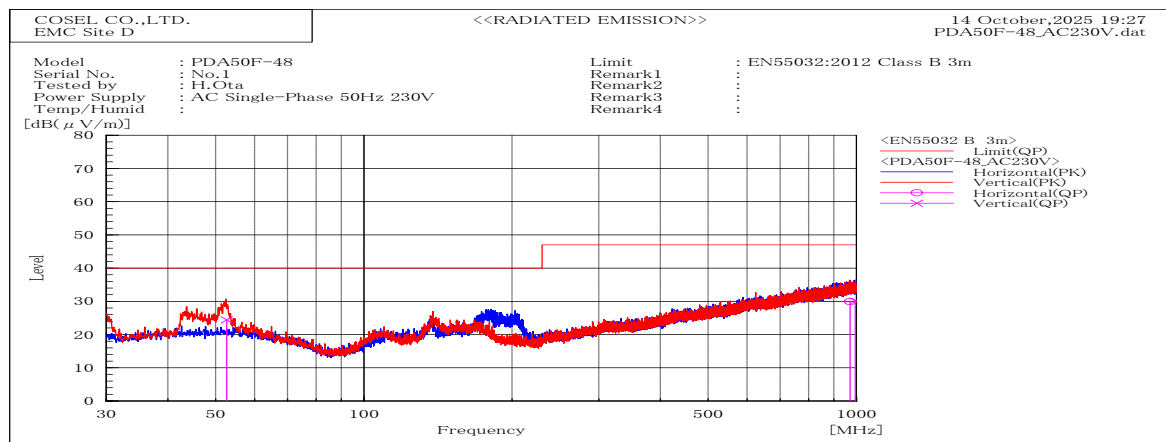


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB				
			QP	QP	QP		cm	deg	
52.651	V	Stable	24.4	40	15.6	Pass	100	149.5	
970.817	H	Stable	29.9	47	17.1	Pass	198.3	46.4	
994.701	V	Stable	30.1	47	16.9	Pass	194.5	309.8	

DATA SHEET		Date	14-Oct-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	H.Ota

### 1. Line conduction

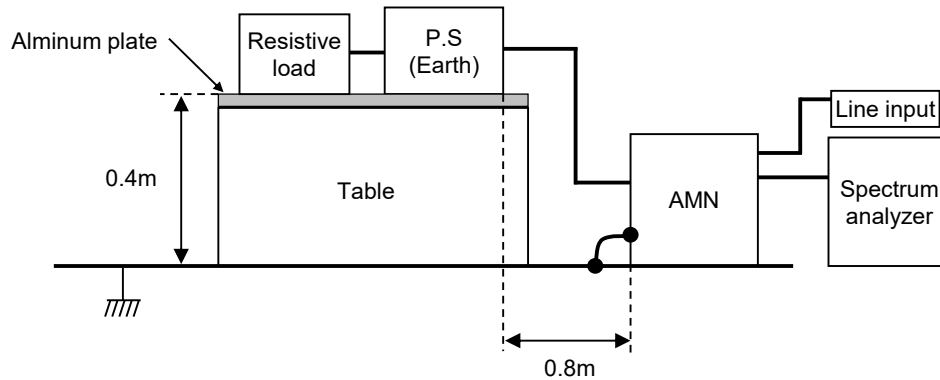


### 2. Radiated emission

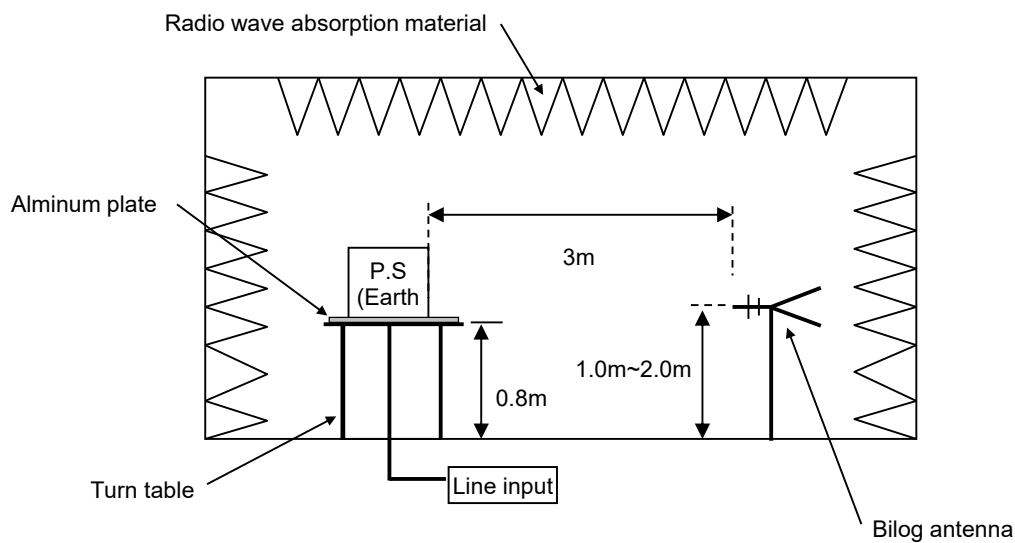

## Conditions

Test : EMI  
Model Name : PDA50F-48

### 1.LINE CONDUCTION

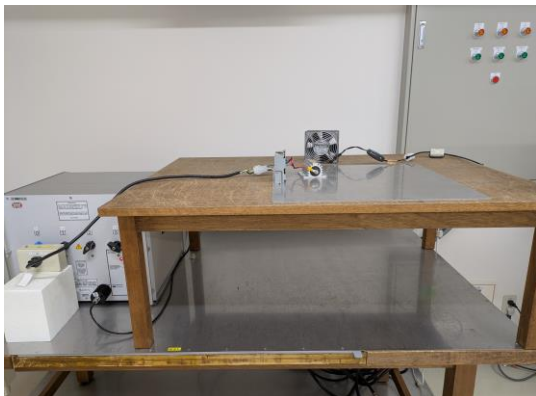

### 2.RADIATED EMISSION

