



DATA SHEET		Date	19-Jun-25
Model	PDA600F-36	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

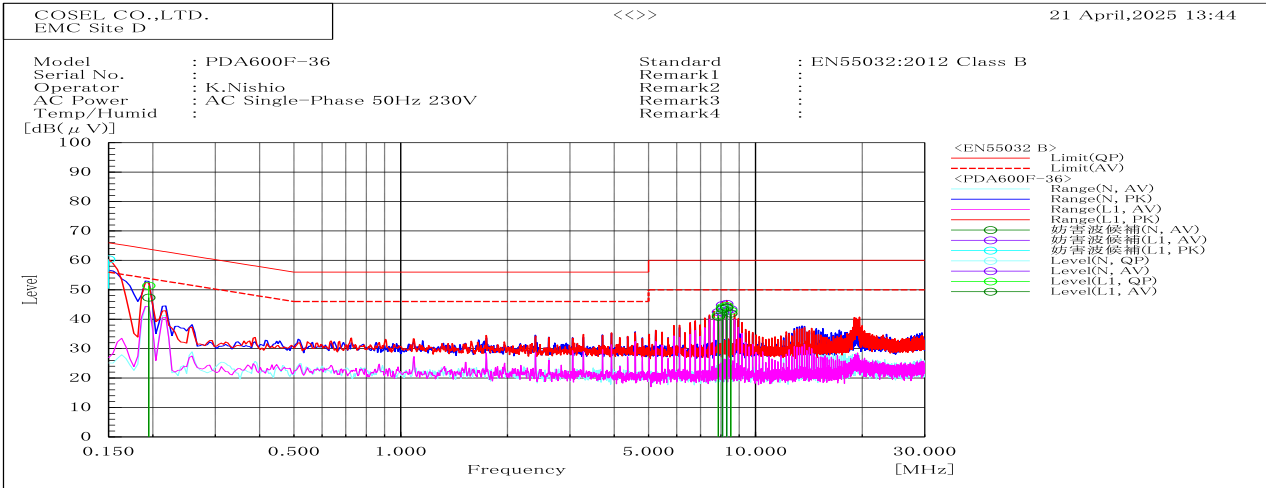


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.195	L1	51.4	47.3	63.8	53.8	12.4	6.5	Pass	
7.859	L1	41.5	40.8	60	50	18.5	9.2	Pass	
8.077	L1	44.1	43.4	60	50	15.9	6.6	Pass	
8.295	L1	44.5	43.9	60	50	15.5	6.1	Pass	
8.515	L1	42.9	41.9	60	50	17.1	8.1	Pass	
8.078	N	43	42.3	60	50	17	7.7	Pass	
8.295	N	43.4	42.8	60	50	16.6	7.2	Pass	

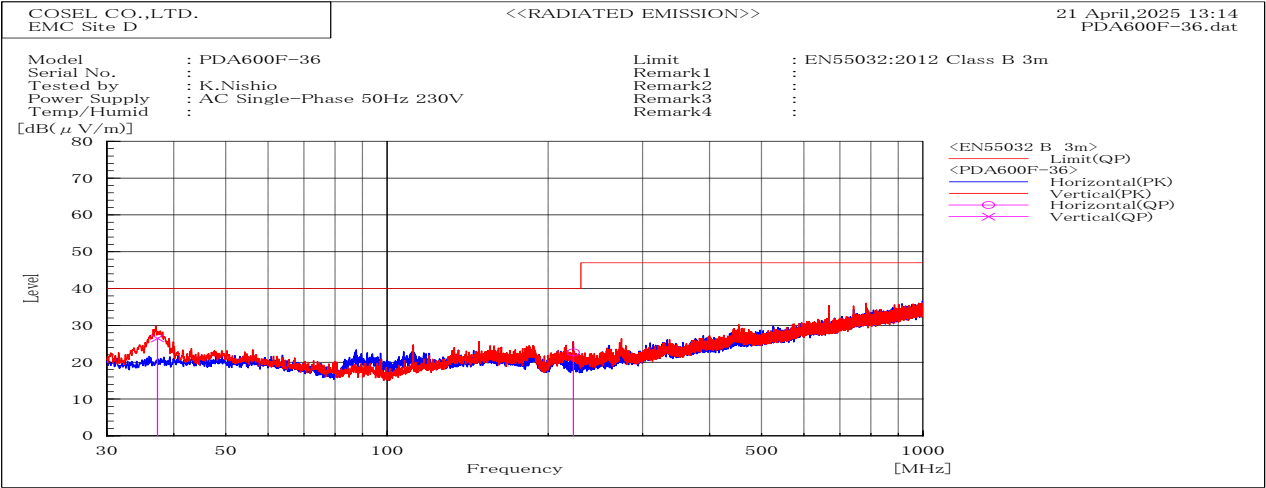


Frequency MHz	Polarization	Stability	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
37.303	V	Stable	26.5	40	13.5	Pass	100	21.6	
222.777	H	Stable	22.7	40	17.3	Pass	132.5	55.4	

DATA SHEET		Date	19-Jun-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Nishio

1. Line conduction

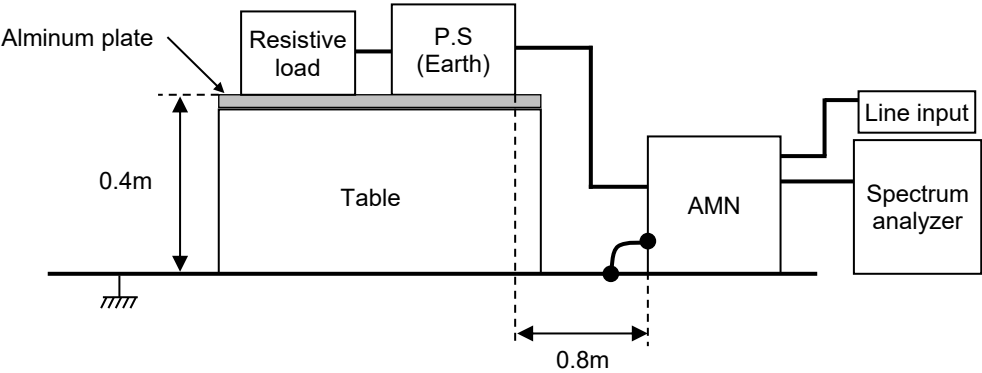


2. Radiated emission

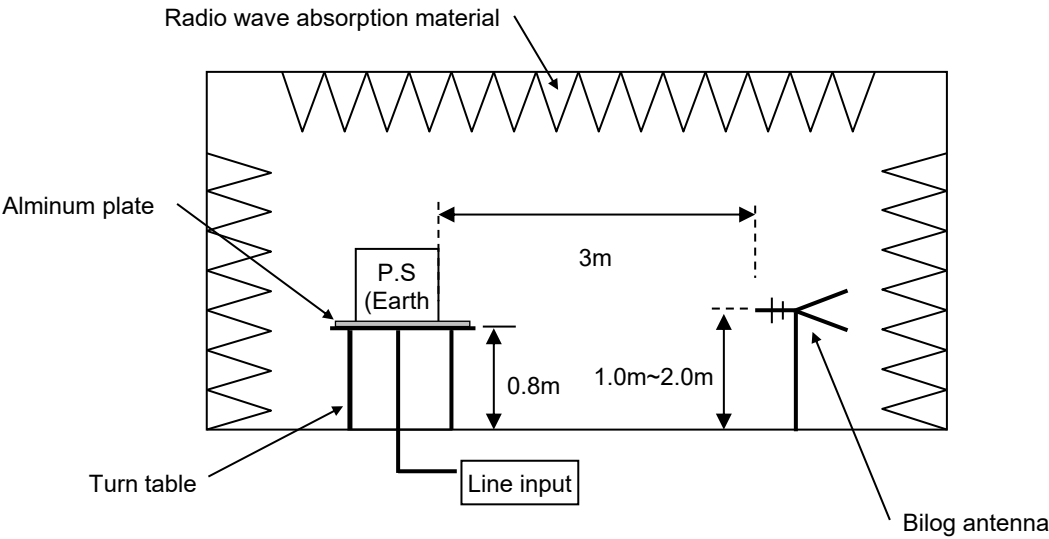

Conditions

Test : EMI
Model Name : PDA600F-36

1.LINE CONDUCTION

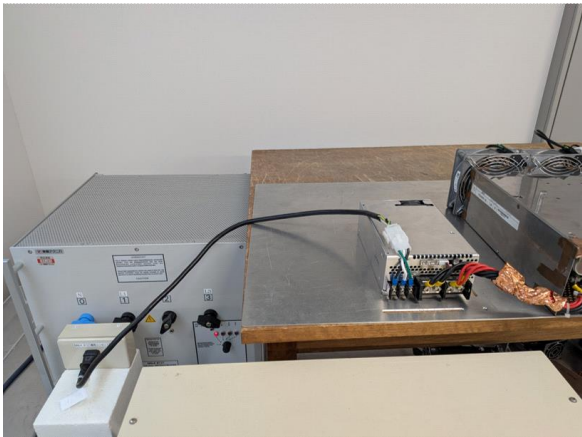

2.RADIATED EMISSION

