



DATA SHEET		Date	28-Nov-25
Model	PDA600F-3R3	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Yoshioka

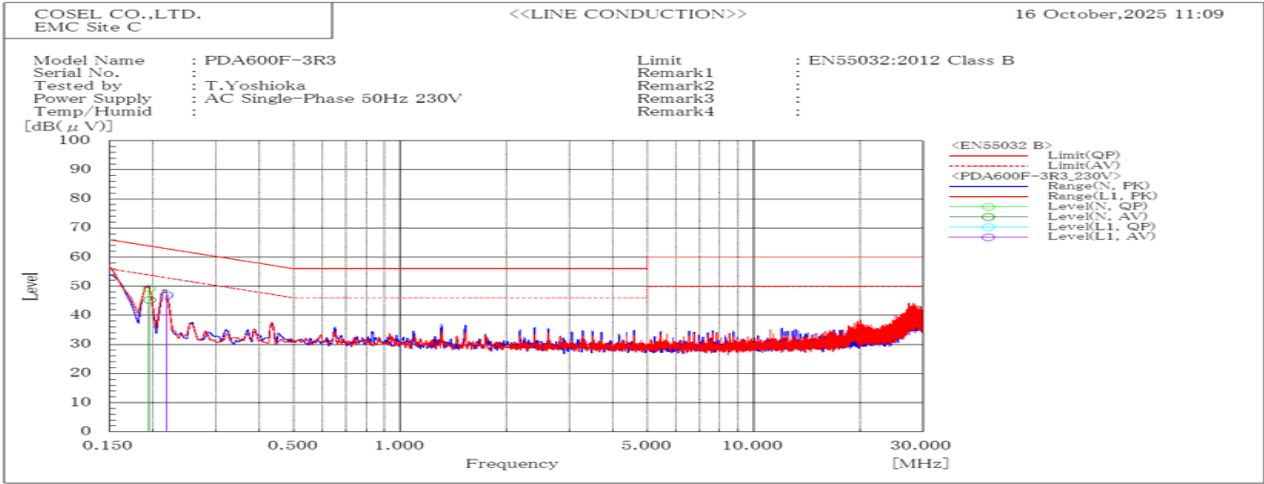


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.218	L1	47.3	46.8	62.9	52.9	15.6	6.1	Pass	
0.195	N	49.3	45.3	63.8	53.8	14.5	8.5	Pass	

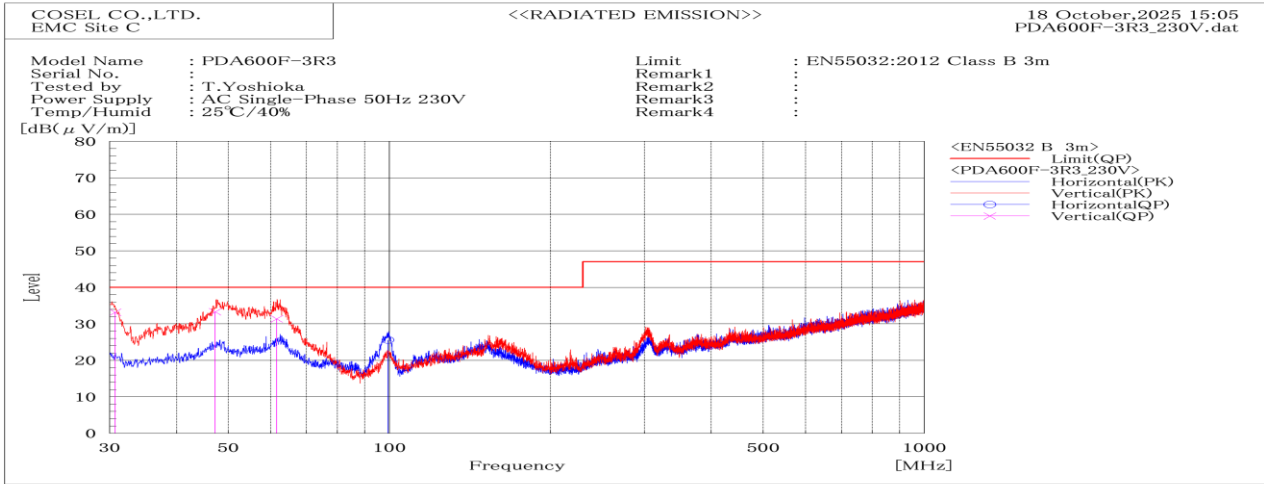


Frequency MHz	Polarization	Stability	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
99.429	H	Stable	25.6	40	14.4	Pass	194.2	209.4	
30.715	V	Stable	33.2	40	6.8	Pass	100	208.2	
47.283	V	Stable	33.3	40	6.7	Pass	100	327.2	
61.587	V	Stable	31.4	40	8.6	Pass	100.2	256.4	

DATA SHEET		Date	28-Nov-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Yoshioka

1. Line conduction

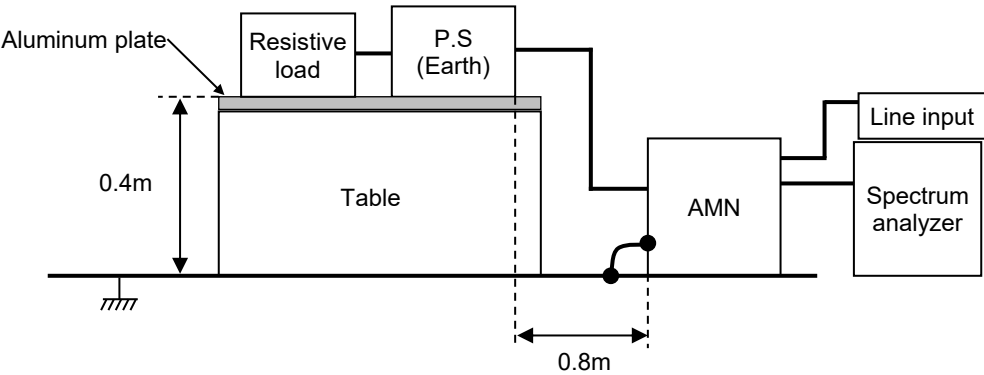


2. Radiated emission

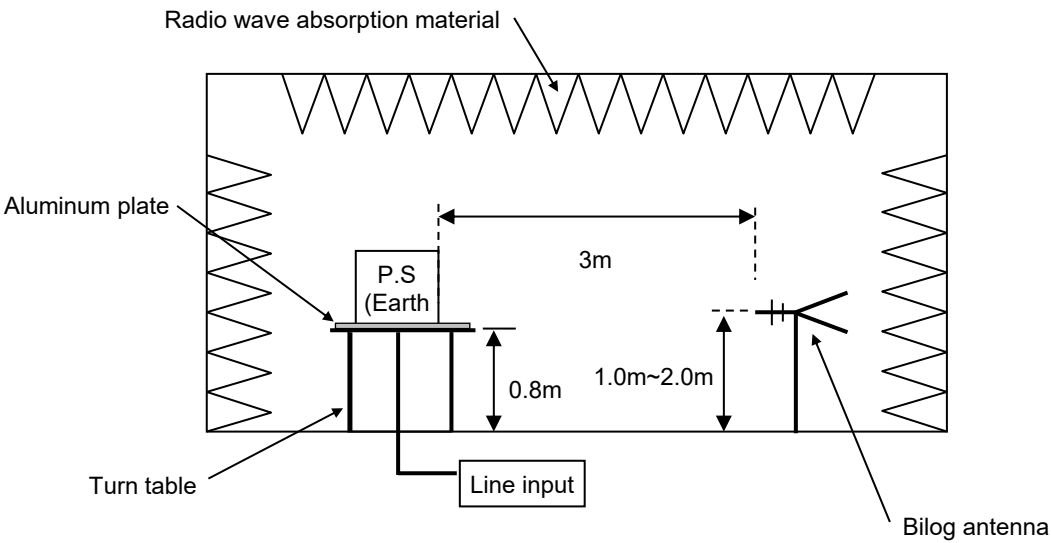

Conditions

Test : EMI
Model Name : PDA600F-3R3

1.LINE CONDUCTION

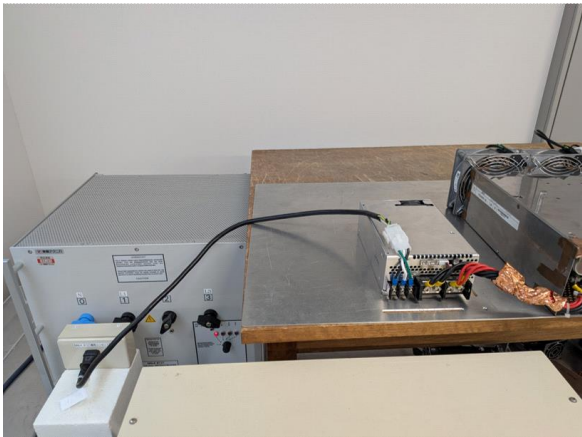

2.RADIATED EMISSION

