



DATA SHEET			Date	28-Nov-25
Model	PDA600F-5		Temp.	25 degreeC
Test	EMI		Humid.	40 %RH
	Line conduction & Radiated emission		Tested by	T.Yoshioka

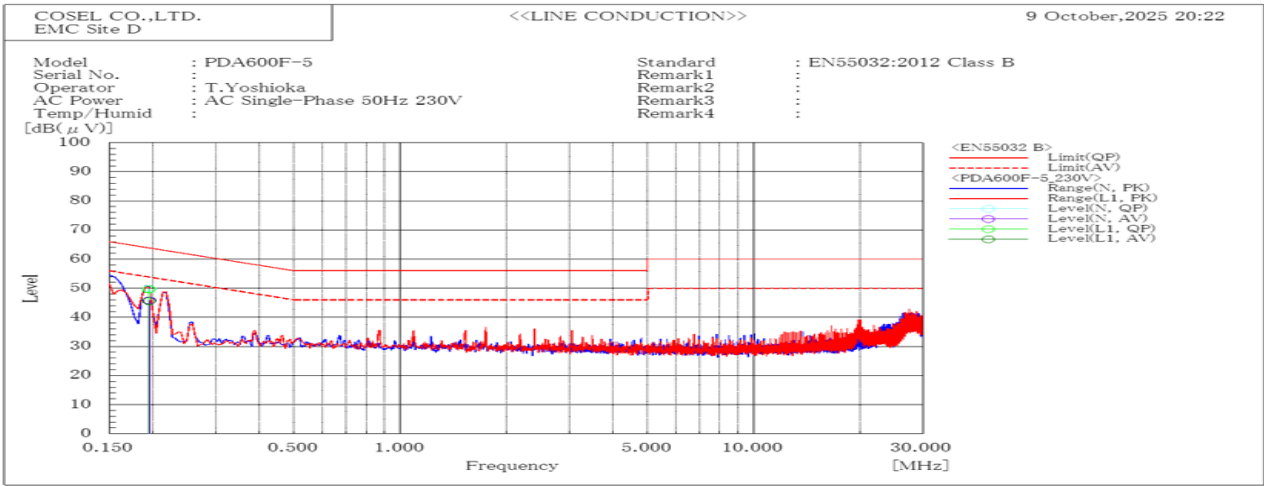


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.195	L1	49.7	45.6	63.8	53.8	14.1	8.2	Pass	
0.194	L1	49.6	45.6	63.8	53.8	14.2	8.2	Pass	
0.195	N	49.8	45.9	63.8	53.8	14	7.9	Pass	
0.195	N	49.8	45.8	63.8	53.8	14	8	Pass	

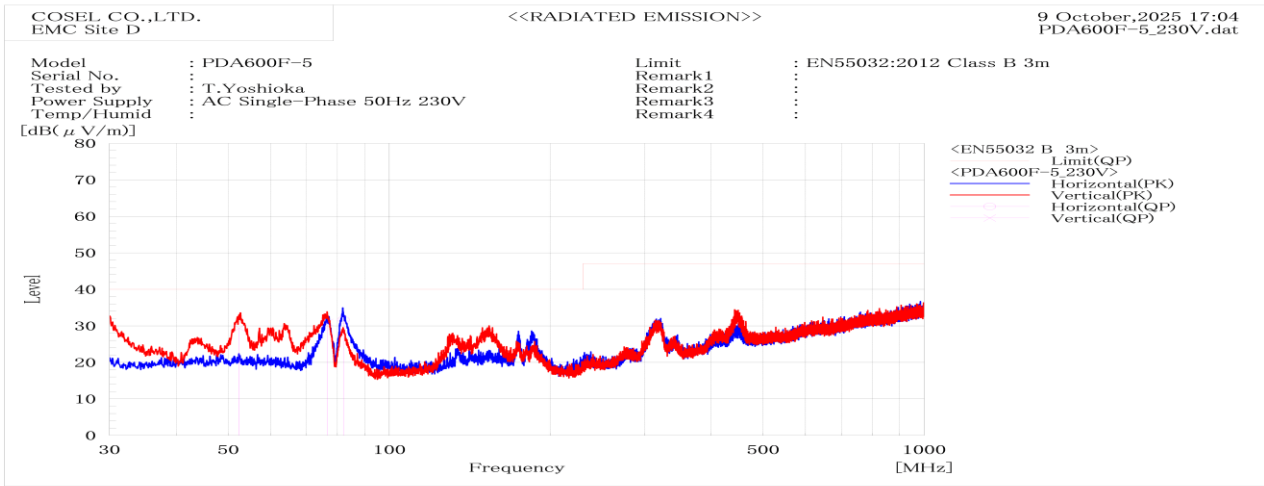


Frequency MHz	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(μV/m) QP	dB(μV/m) QP	dB QP				
82.114	H	Stable	31.7	40	8.3	Pass	198.2	175.8	
52.413	V	Stable	29.4	40	10.6	Pass	100	294.1	
76.545	V	Stable	31	40	9	Pass	101.6	320.3	

DATA SHEET		Date	28-Nov-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Yoshioka

1. Line conduction

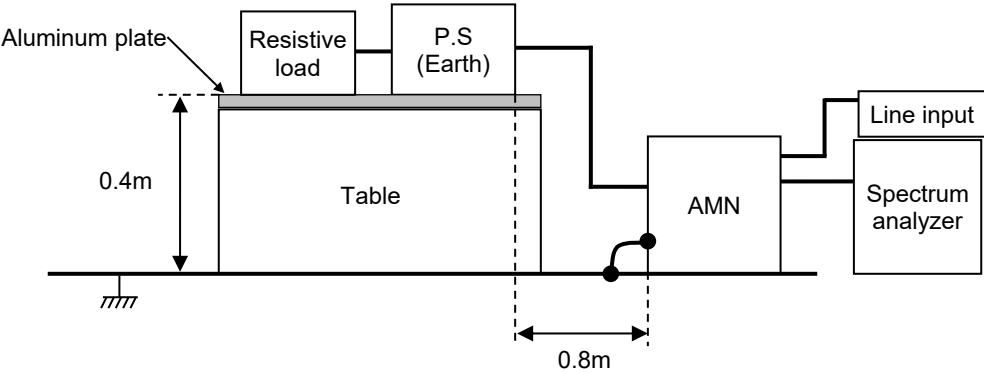


2. Radiated emission

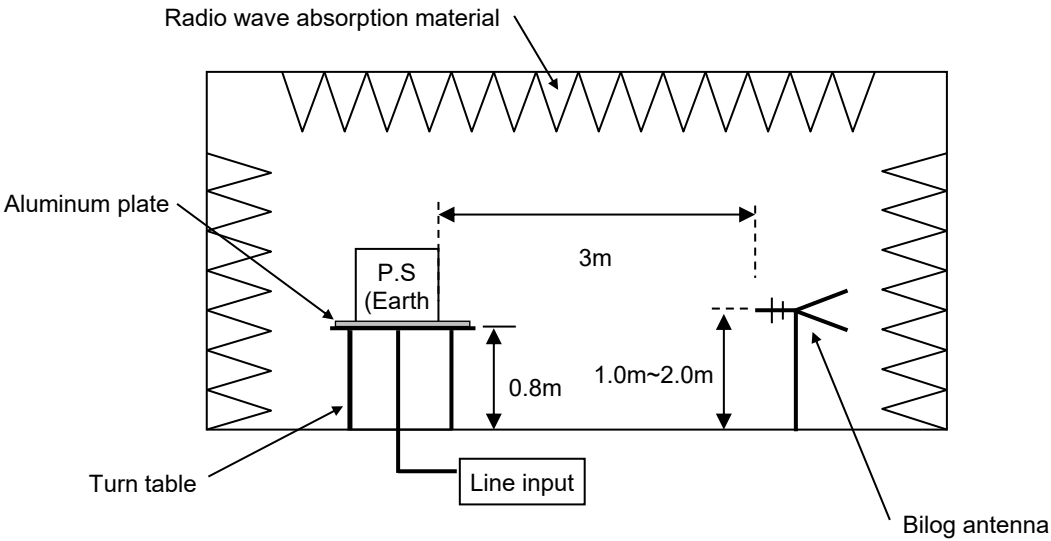

Conditions

Test : EMI
Model Name : PDA600F-5

1.LINE CONDUCTION

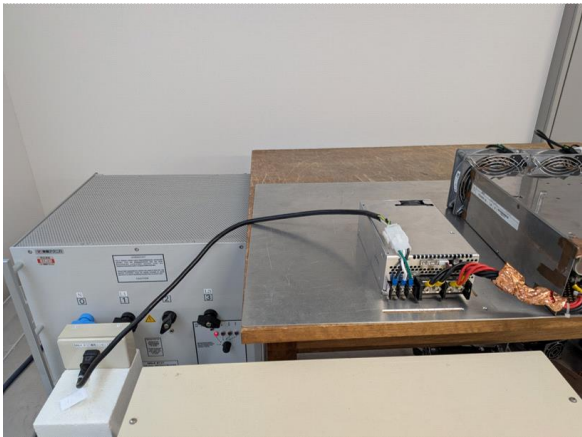

2.RADIATED EMISSION

