



DATA SHEET		Date	10-May-17
Model	PJA1000F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	N.Fujita

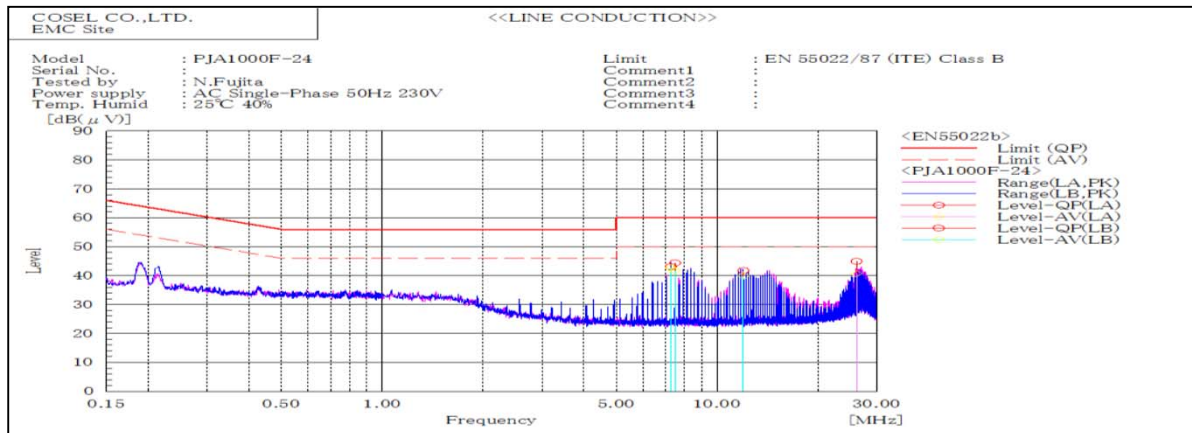


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
7.27768	LB	22.3	21.9	20.8	43.1	42.7	60	50	16.9	7.3	Pass	
7.49292	LB	23.6	21	20.8	44.4	41.8	60	50	15.6	8.2	Pass	
11.98895	LB	20.7	18.8	21.1	41.8	39.9	60	50	18.2	10.1	Pass	
26.1208	LA	23.6	19.4	21.3	44.9	40.7	60	50	15.1	9.3	Pass	

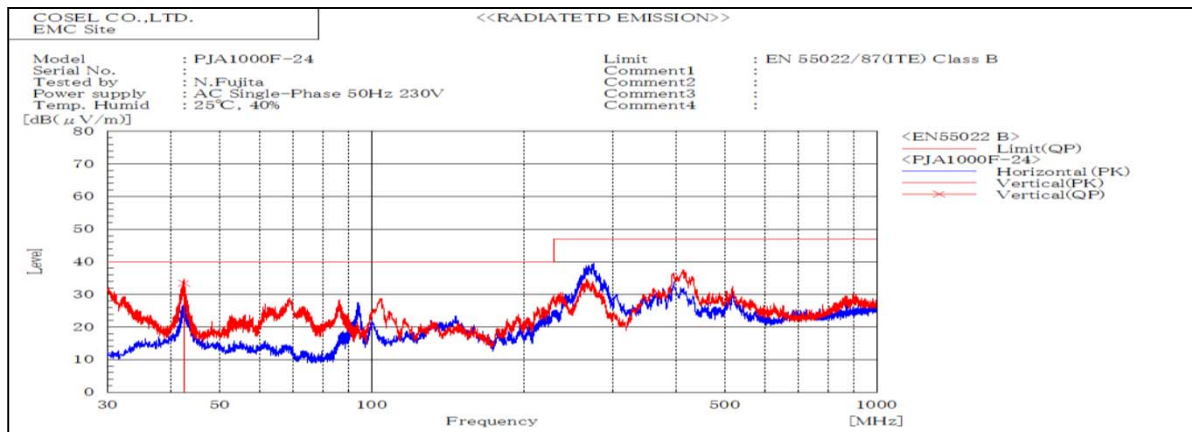

Frequency MHz	Polarization	Stability	Reading dB(μV)	Factor dB(1/m)	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
			QP		QP	QP					
42.604	V	Stable	47	-13.6	33.4	40	6.6	Pass	118	87	

DATA SHEET		Date	10-May-17
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	N.Fujita

1. Line conduction

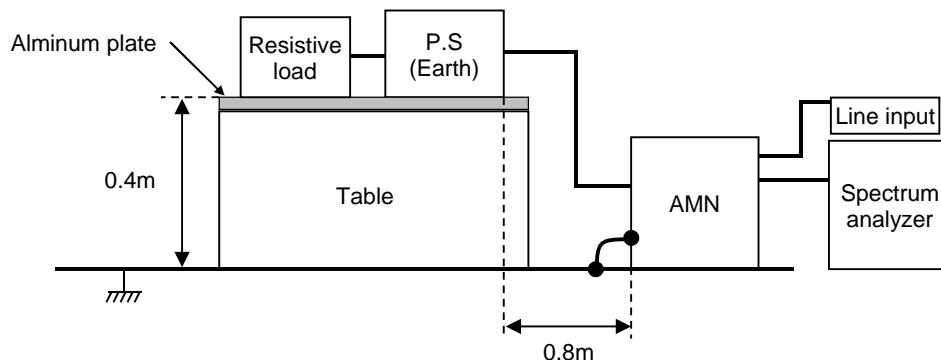

2. Radiated emission

