



| DATA SHEET | | Date | 14-Jul-17 |
|------------|--|-----------|------------|
| Model | PJA300F-24 | Temp. | 25 degreeC |
| Test | EMI Line conduction & Radiated emission | Humid. | 40 %RH |
| | | Tested by | Kawahata |

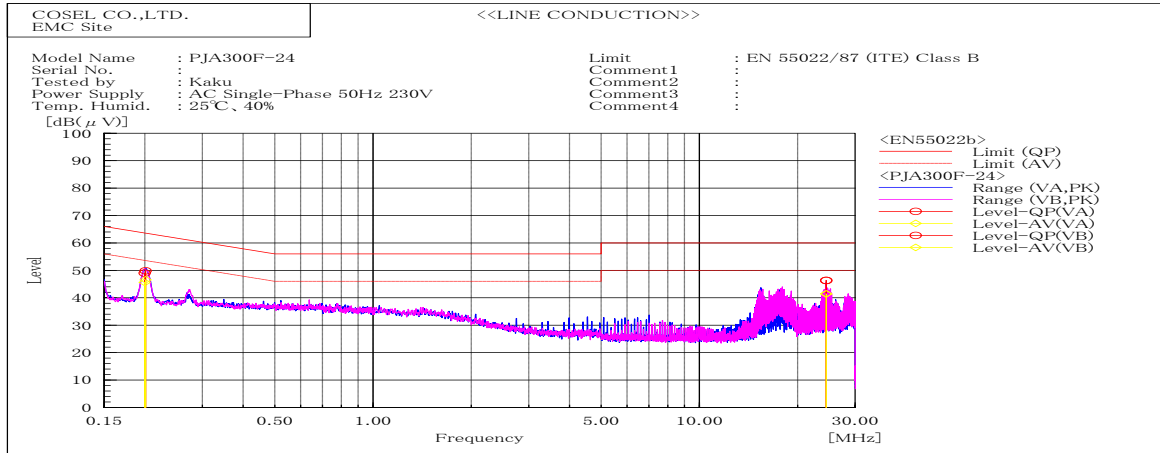


| Frequency MHz | Line Phase | Reading dB(μV) | | Factor dB | Level dB(μV) | | Limit dB(μV) | | Margin dB | | Pass/Fail | Remark |
|------------------|---------------|-------------------|------|--------------|-----------------|------|-----------------|------|--------------|-----|-----------|--------|
| | | QP | AV | | QP | AV | QP | AV | QP | AV | | |
| 0.20109 | VB | 28.8 | 25.5 | 21 | 49.8 | 46.5 | 63.6 | 53.6 | 13.8 | 7.1 | Pass | |
| 0.19968 | VA | 28 | 24.6 | 21 | 49 | 45.6 | 63.6 | 53.6 | 14.6 | 8 | Pass | |
| 24.4704 | VB | 24.6 | 19.7 | 21.7 | 46.3 | 41.4 | 60 | 50 | 13.7 | 8.6 | Pass | |
| 24.4701 | VA | 24.6 | 19.8 | 21.7 | 46.3 | 41.5 | 60 | 50 | 13.7 | 8.5 | Pass | |

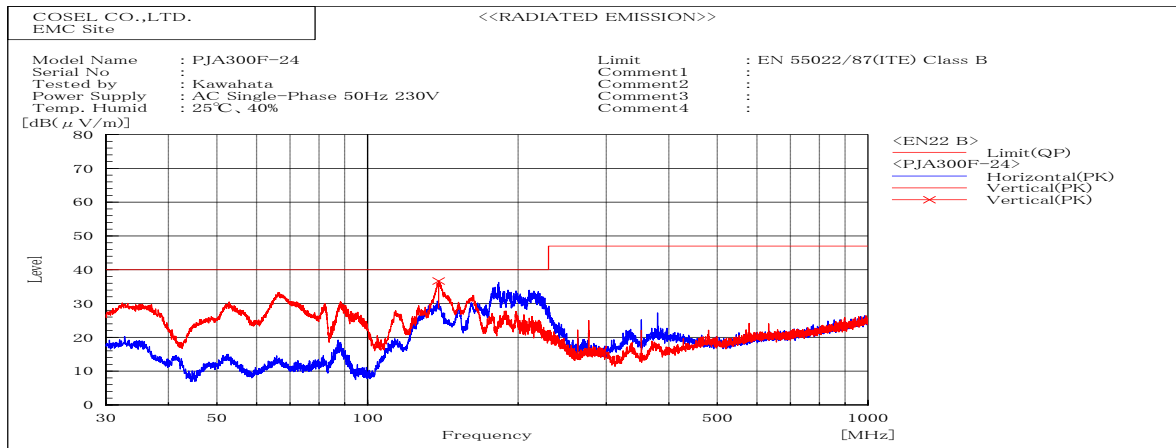

| Frequency MHz | Polarization | Stability | Reading dB(μV) | | Factor dB(1/m) | Reading dB(μV) | | Limit dB(μV/m) | Margin dB(μV/m) | Pass/Fail | Height cm | Angle deg | Remark |
|------------------|--------------|-----------|-------------------|-------|-------------------|-------------------|----|-------------------|--------------------|-----------|--------------|--------------|--------|
| | | | QP | AV | | QP | AV | | | | | | |
| 139.006 | V | Stable | 46.2 | -13.3 | | 32.9 | | 40.0 | 7.1 | Pass | 115 | 359 | |

| DATA SHEET | | Date | 14-Jul-17 |
|------------|--|-----------|------------|
| Model | Circuit used for measurement | Temp. | 25 degreeC |
| Test | EMI Line conduction & Radiated emission | Humid. | 40 %RH |
| | | Tested by | Kawahata |

1. Line conduction

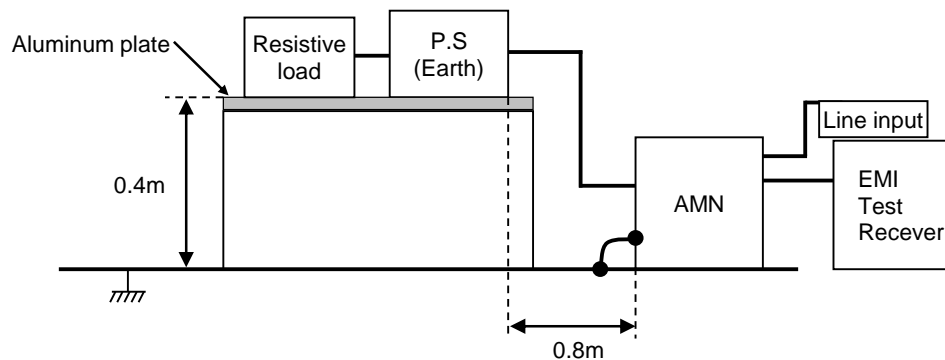

2. Radiated emission

