



DATA SHEET		Date	14-Jul-17
Model	PJA300F-36	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Kawahata

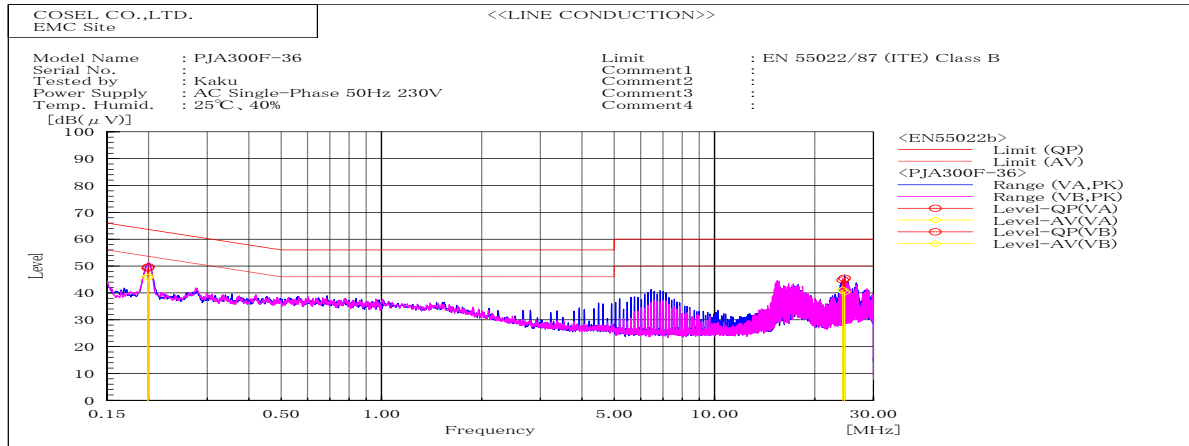


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.19985	VA	28.6	25.3	21	49.6	46.3	63.6	53.6	14	7.3	Pass	
0.19895	VB	28.3	24.7	21	49.3	45.7	63.7	53.7	14.4	8	Pass	
24.2744	VB	23	19.3	21.8	44.8	41.1	60	50	15.2	8.9	Pass	
24.5817	VA	23.8	18.6	21.7	45.5	40.3	60	50	14.5	9.7	Pass	

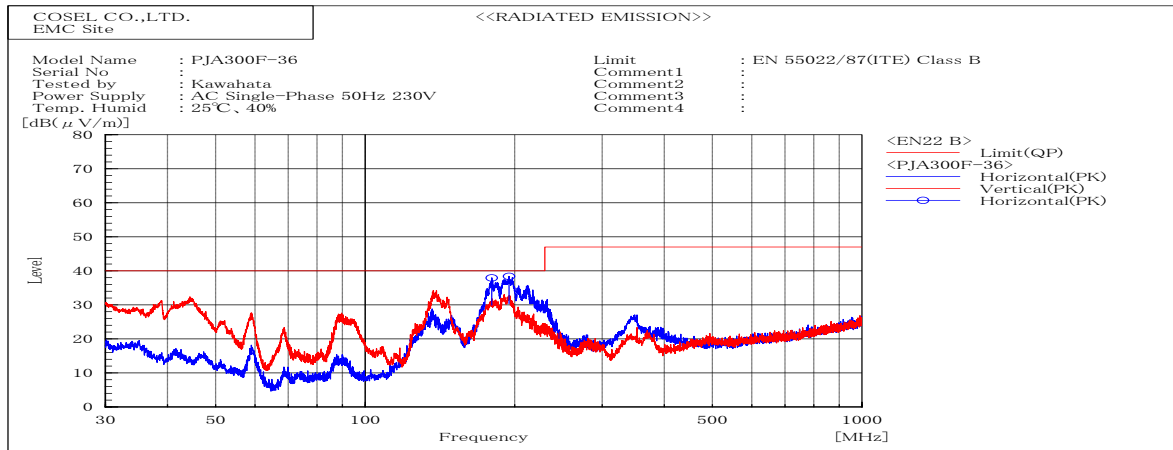

Frequency MHz	Polarization	Stability	Reading dB(μV)		Factor dB(1/m)	Reading dB(μV)		Limit dB(μV/m)		Margin dB(μV/m)	Pass/Fail	Height cm	Angle deg	Remark
			QP			QP		QP	QP					
180.442	H	Stable	46.4		-12.6	33.8		40.0		6.2	Pass	133	193	
194.564	H	Stable	46.8		-12.8	34.0		40.0		6.0	Pass	159	13	

DATA SHEET		Date	14-Jul-17
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Kawahata

1. Line conduction

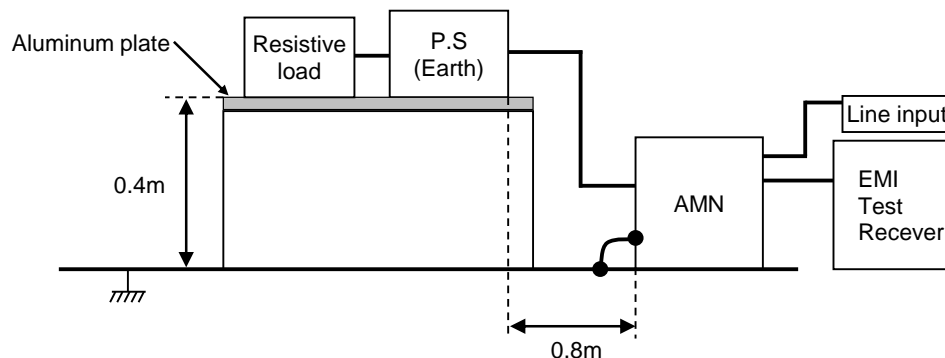

2. Radiated emission

