



DATA SHEET		Date	09-Dec-16
Model	PJA600F-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Aoki

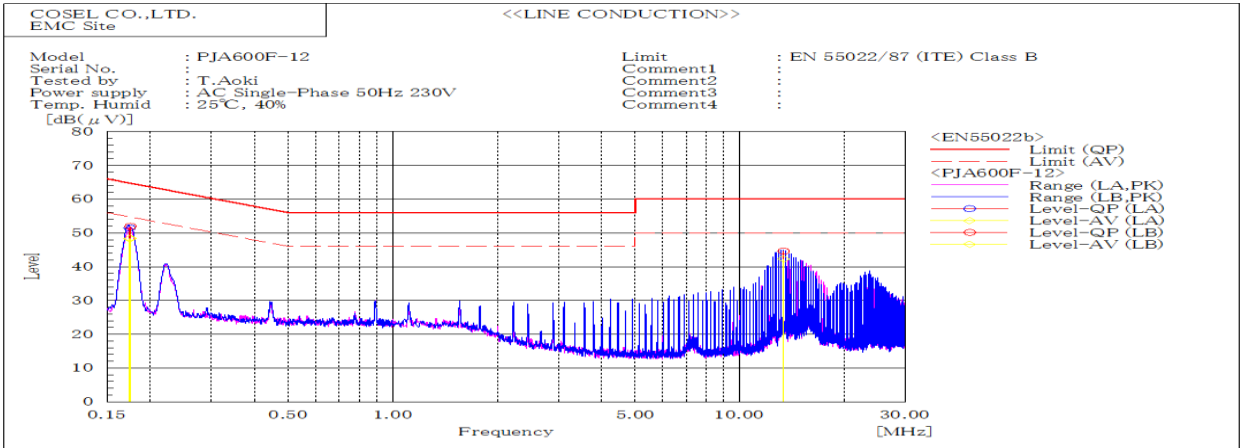


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.17435	LA	41.1	37.9	10.4	51.5	48.3	64.8	54.8	13.3	6.5	Pass	
0.17522	LB	41.6	38	10.4	52	48.4	64.7	54.7	12.7	6.3	Pass	
13.3833	LB	33.4	31.1	11.2	44.6	42.3	60	50	15.4	7.7	Pass	

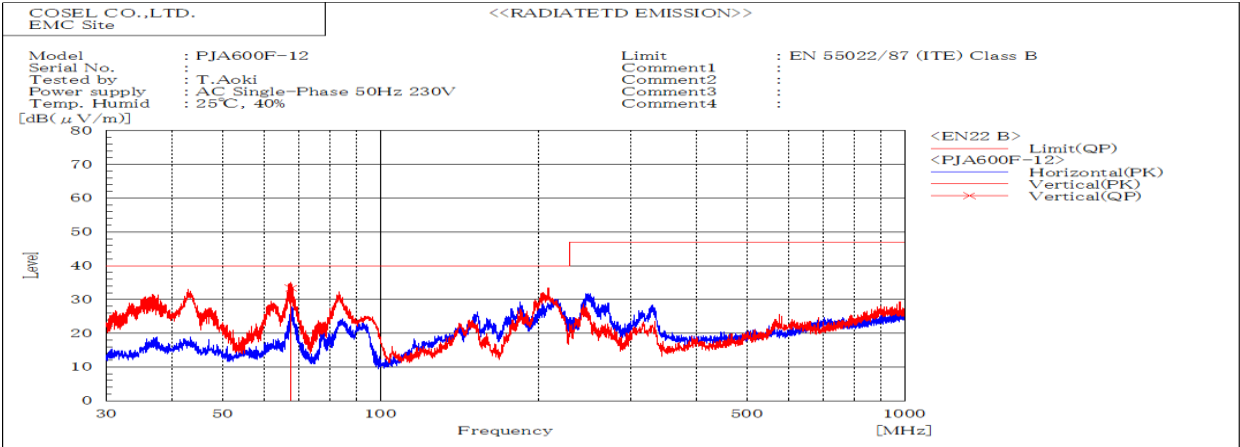

Frequency MHz	Polariza tion	Stability	Reading dB(μV)	Factor dB(1/m)	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
			QP		QP	QP					
67.552	V	Stable	50	-16.6	33.4	40	6.6	Pass	103	63	

DATA SHEET		Date	09-Dec-16
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Aoki

1. Line conduction

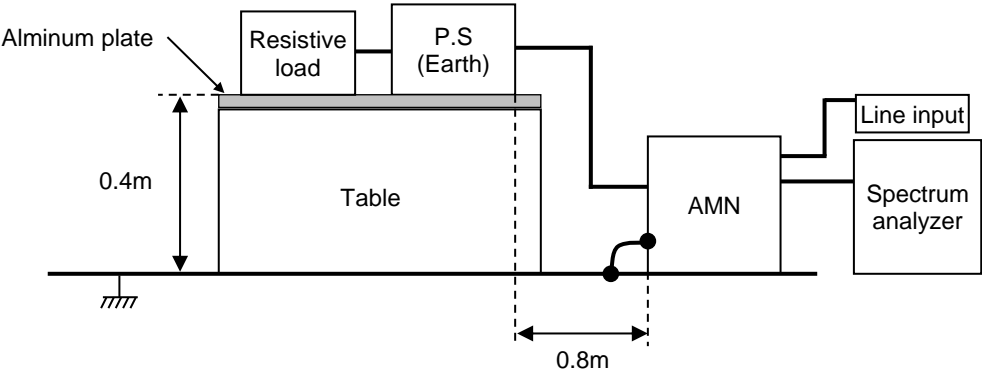

2. Radiated emission

