



DATA SHEET		Date	09-Dec-16
Model	PJA600F-15	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Aoki

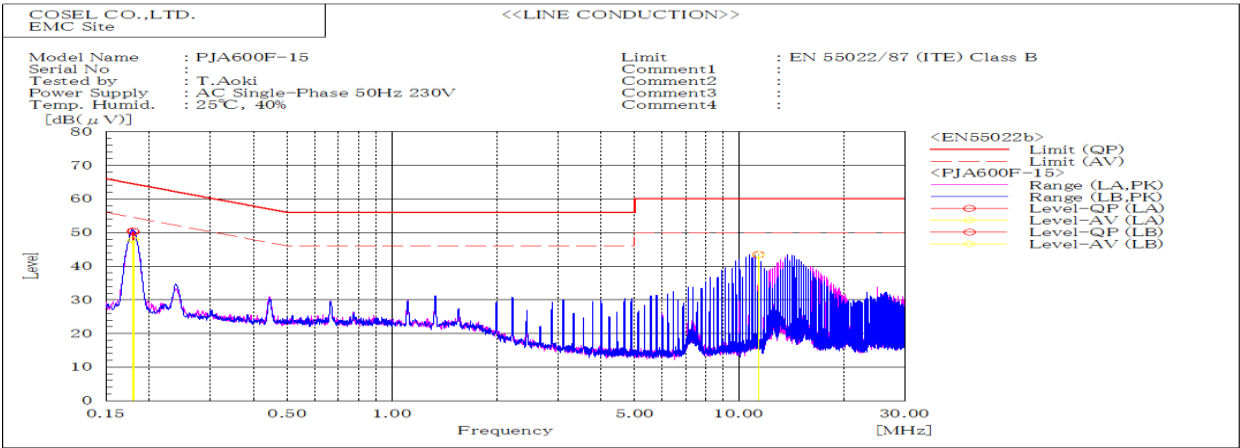


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.17984	LA	39.9	37.5	10.4	50.3	47.9	64.5	54.5	14.2	6.6	Pass	
0.17937	LB	40	37.3	10.4	50.4	47.7	64.5	54.5	14.1	6.8	Pass	
11.34575	LB	32.3	32.2	11.1	43.4	43.3	60	50	16.6	6.7	Pass	

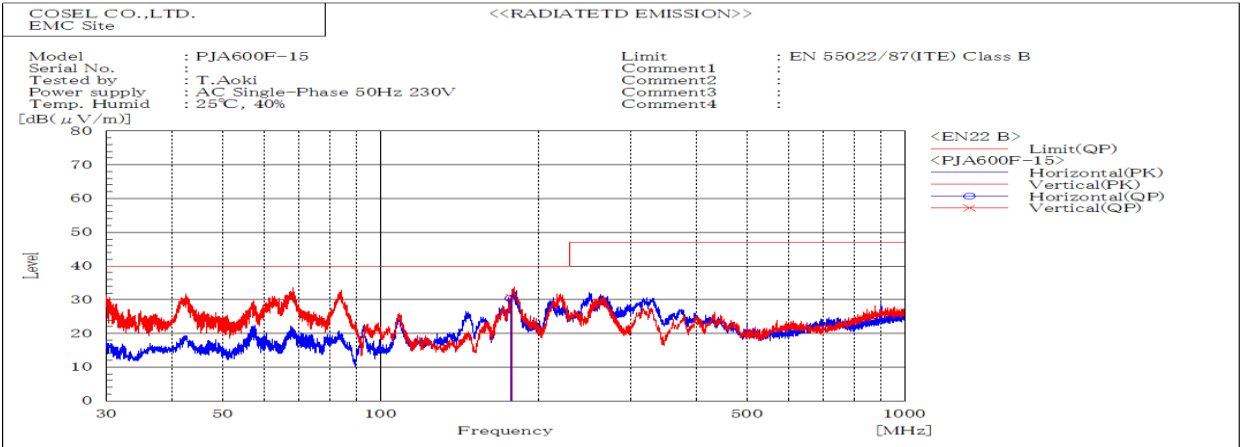

Frequency MHz	Polariza tion	Stability	Reading dB(μV)	Factor dB(1/m)	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
			QP		QP	QP					
177.154	H	Stable	45.5	-15.1	30.4	40	9.6	Pass	185	143	
177.954	V	Stable	45.4	-14.8	30.6	40	9.4	Pass	100	188	

DATA SHEET		Date	09-Dec-16
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Aoki

1. Line conduction

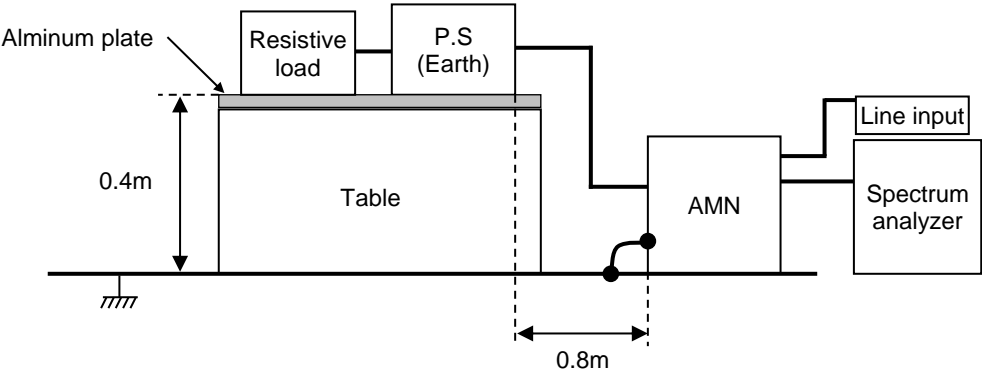

2. Radiated emission

