



DATA SHEET		Date	09-Dec-16
Model	PJA600F-5	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Aoki

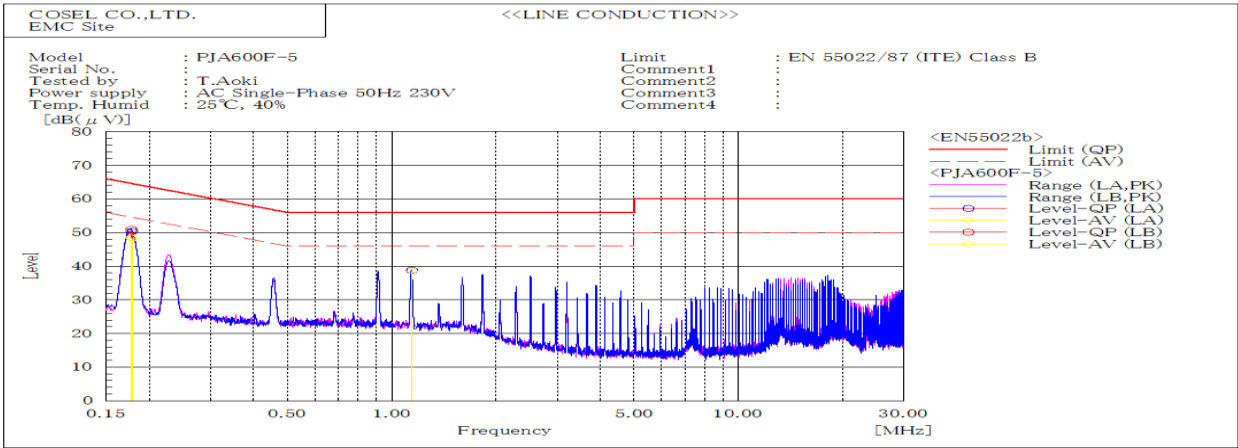


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.17828	LA	39.9	37.9	10.4	50.3	48.3	64.6	54.6	14.3	6.3	Pass	
1.14382	LA	28.4	28.2	10.4	38.8	38.6	56	46	17.2	7.4	Pass	
0.17767	LB	40.6	38.1	10.4	51	48.5	64.6	54.6	13.6	6.1	Pass	

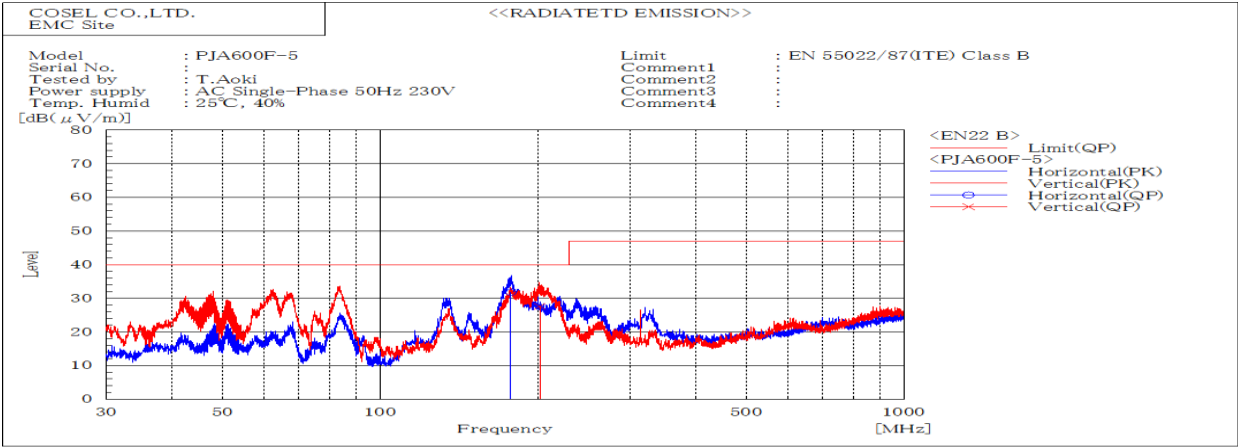

Frequency MHz	Polariza tion	Stability	Reading dB(μV)	Factor dB(1/m)	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
			QP		QP	QP	QP				
177.593	H	Stable	47	-15.2	31.8	40	8.2	Pass	194	328	
201.942	V	Stable	41.7	-14.1	27.6	40	12.4	Pass	110	72	

DATA SHEET		Date	09-Dec-16
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Aoki

1. Line conduction

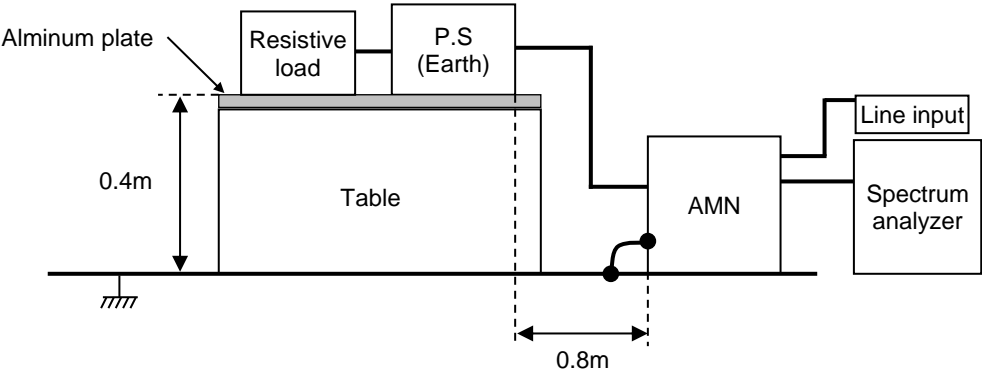

2. Radiated emission

