



DATA SHEET		Date	28-Jan-21
Model	PJMA1000F-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Mukai

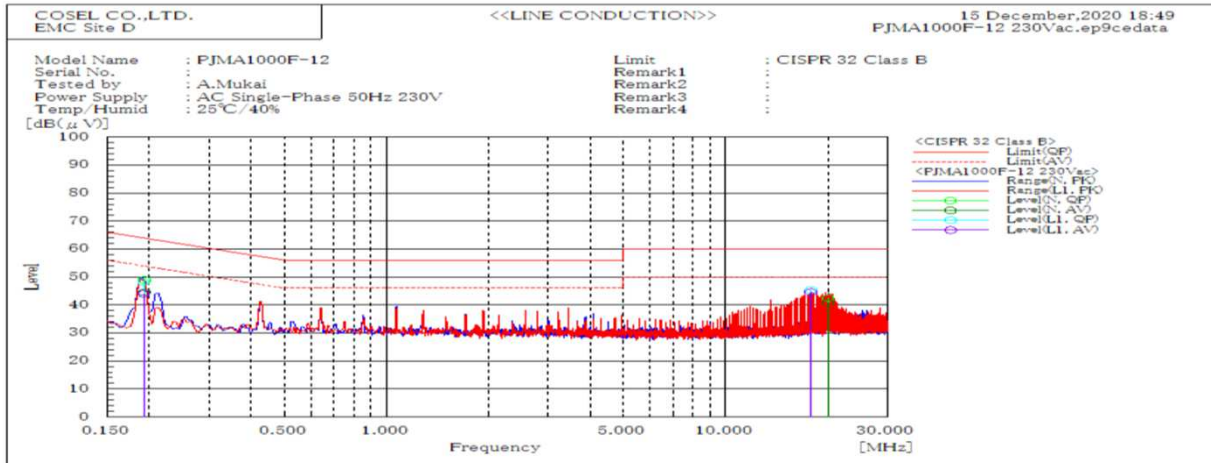


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.193	L1	48.2	44	63.9	53.9	15.7	9.9	Pass	
0.193	N	49	44.6	63.9	53.9	14.9	9.3	Pass	
17.833	L1	45.4	44.6	60	50	14.6	5.4	Pass	
20	N	42.5	40.7	60	50	17.5	9.3	Pass	

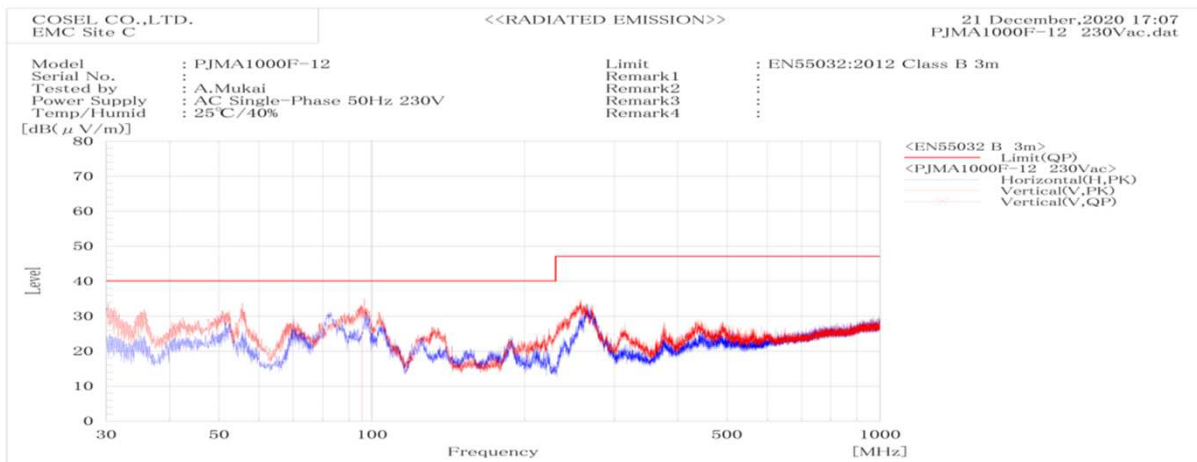


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB				
			QP	QP	QP		cm	deg	
95.702	V	Stable	31.2	40	8.8	Pass	133.7	85.3	

DATA SHEET		Date	28-Jan-21
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Mukai

1. Line conduction

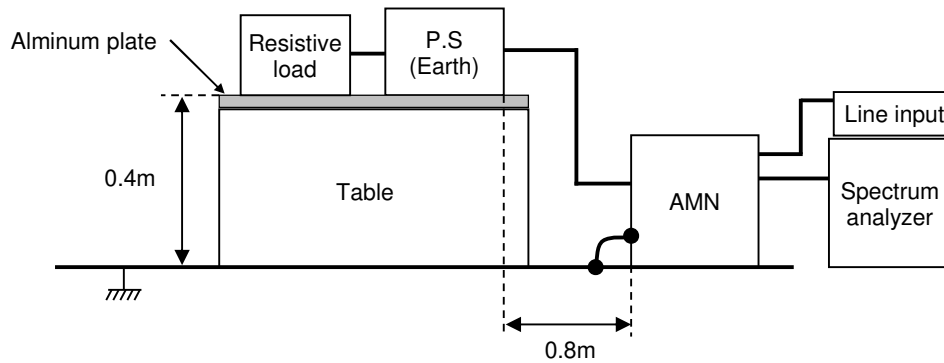

2. Radiated emission

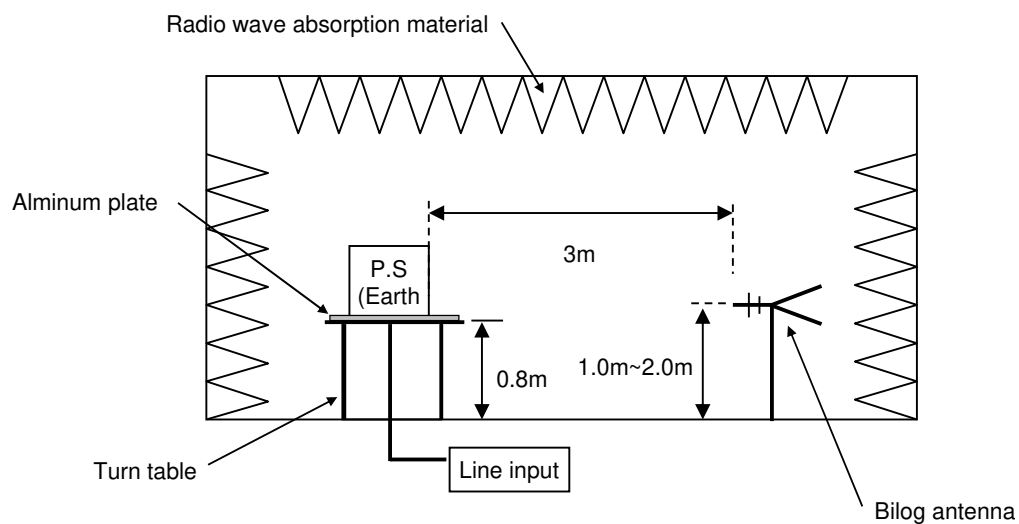

Conditions

Test : EMI
Model Name: PJMA1000F-12

○Photographs of Test Set-Up

1. LINE CONDUCTION

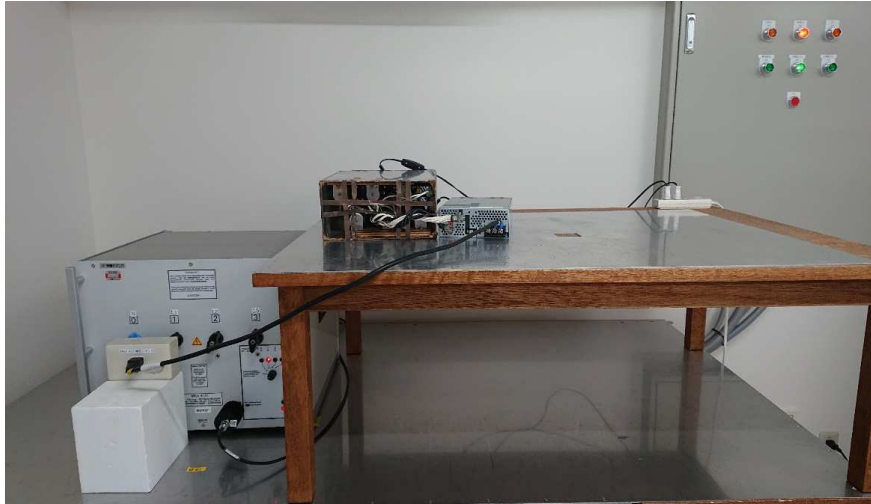


Fig.1 LINE CONDUCTION

○Testing circuitry

2. RADIATED EMISSION

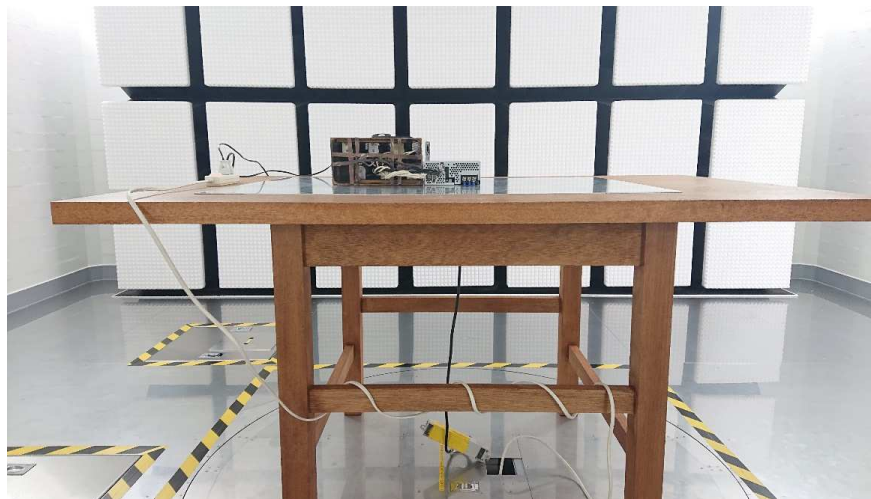


Fig.2 RADIATED EMISSION