



# DATA SHEET

DATA SHEET		Date	28-Jan-21
Model	PJMA1000F-48	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Mukai

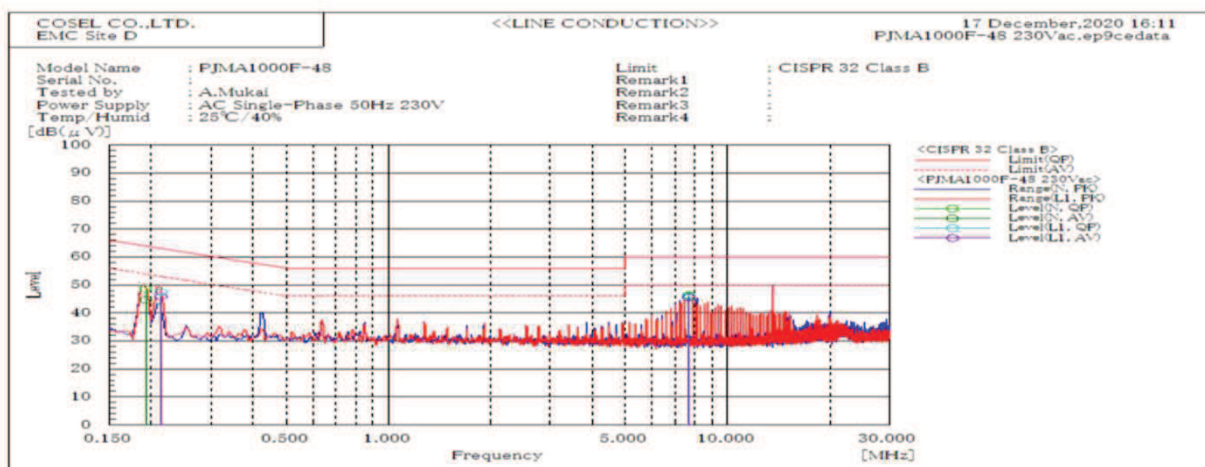


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.193	N	48.8	44.7	63.9	53.9	15.1	9.2	Pass	
0.213	L1	47.5	45.9	63.1	53.1	15.6	7.2	Pass	
7.685	L1	46.1	45.5	60	50	13.9	4.5	Pass	
7.685	N	46.4	46	60	50	13.6	4	Pass	

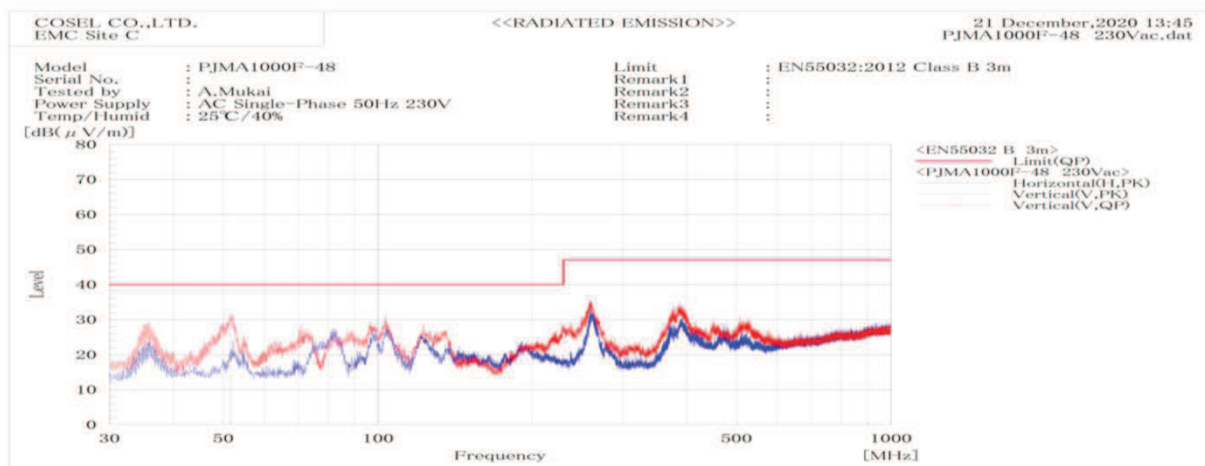


Frequency MHz	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(μV/m) QP	dB(μV/m) QP					
51.65	V	Stable	28.3	40	11.7	Pass	101.6	296	

DATA SHEET		Date	28-Jan-21
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Mukai

### 1. Line conduction

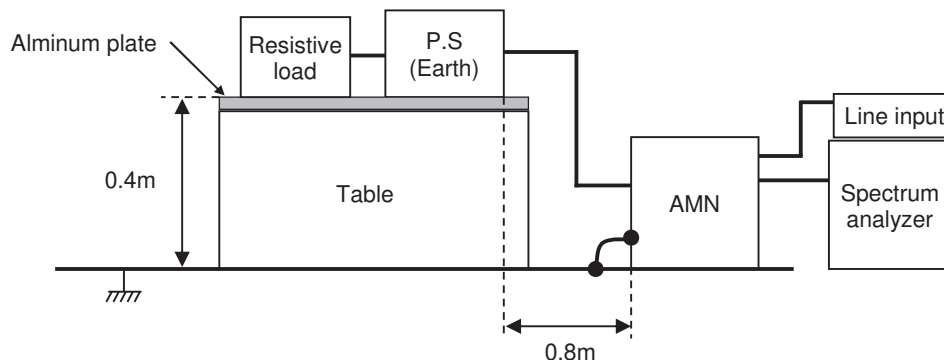

### 2. Radiated emission

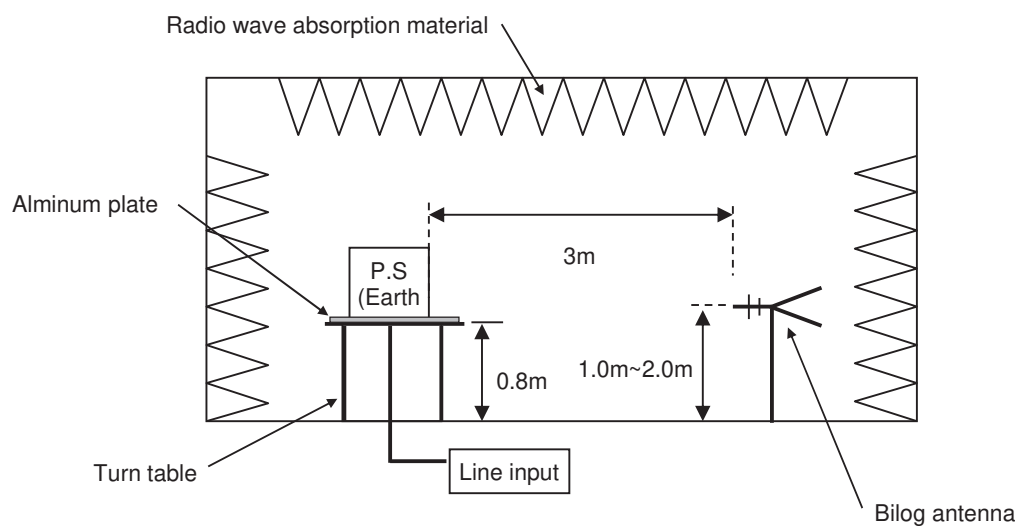

**Conditions**

Test : EMI  
Model Name: PJMA1000F-48

○Photographs of Test Set-Up

**1. LINE CONDUCTION**

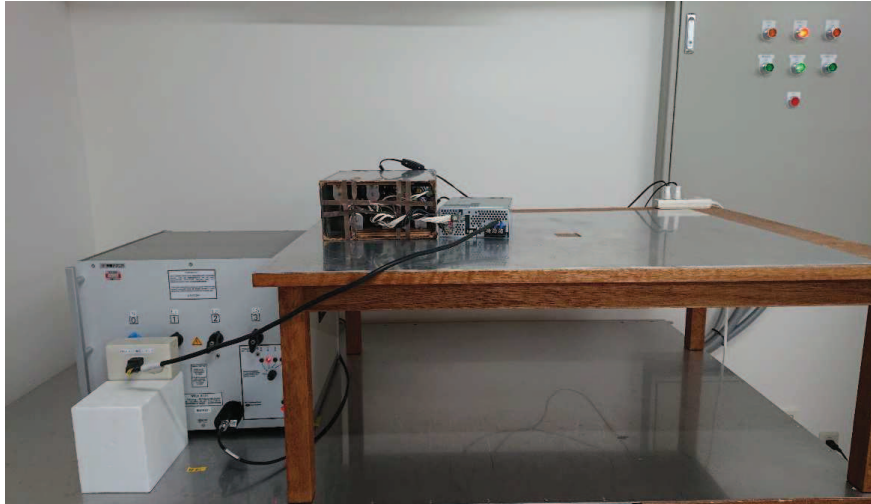


Fig.1 LINE CONDUCTION

○Testing circuitry

**2. RADIATED EMISSION**

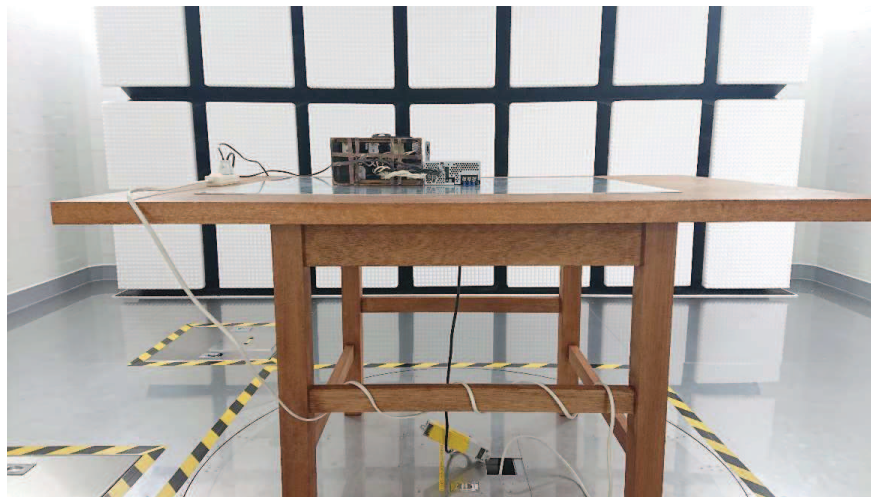


Fig.2 RADIATED EMISSION