



DATA SHEET		Date	29-Sep-22
Model	PJMA1500F-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	A.Mukai

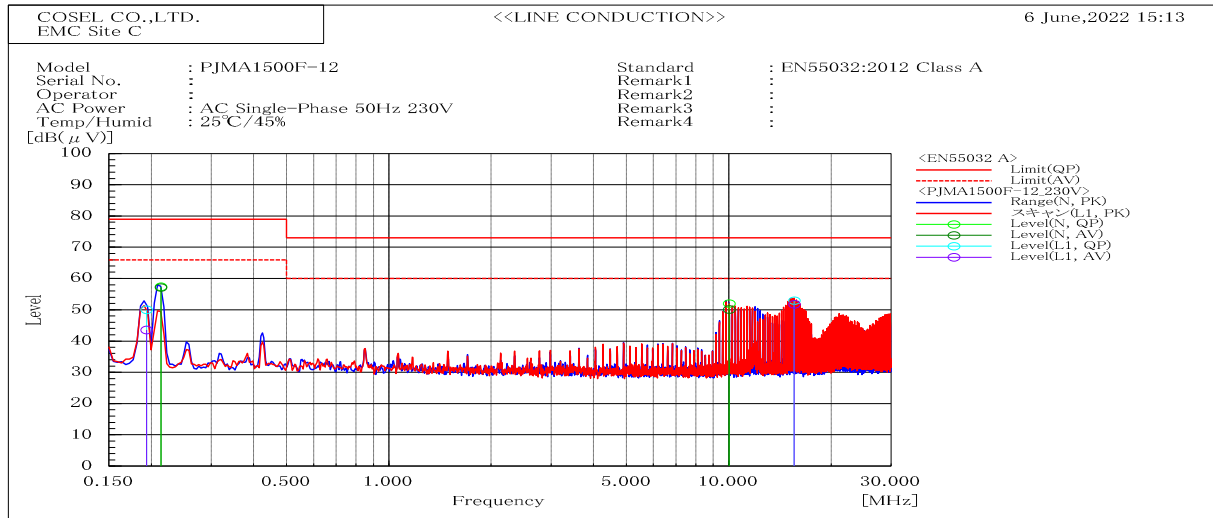


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.194	L1	50	43.5	79	66	29	22.5	Pass	
0.213	N	57.3	57.1	79	66	21.7	8.9	Pass	
10.031	N	52	50.1	73	60	21	9.9	Pass	
15.58	L1	52.9	51.8	73	60	20.1	8.2	Pass	

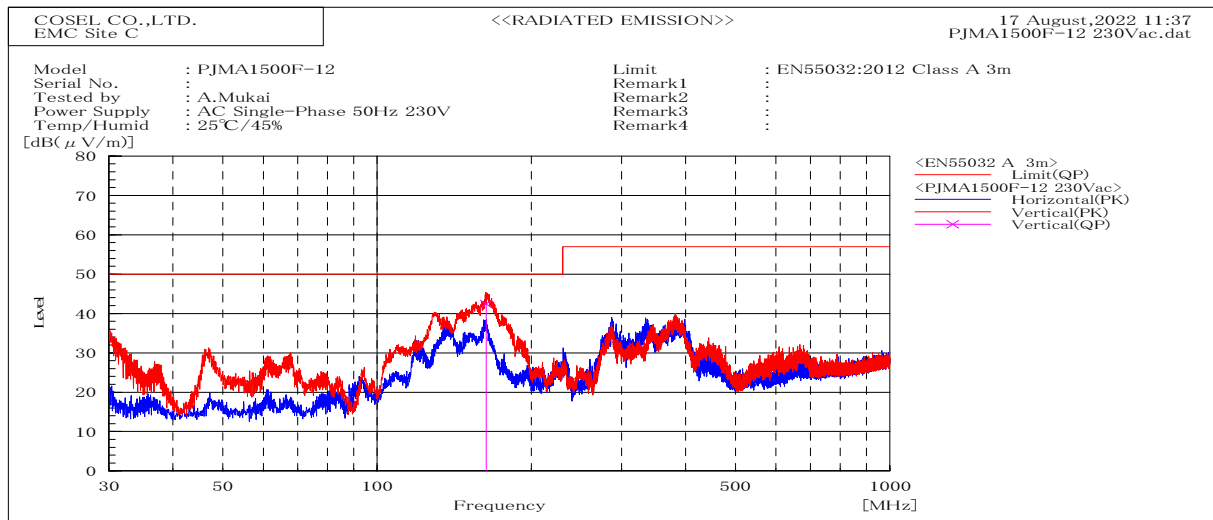


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB				
			QP	QP	QP				
163.214	V	Stable	42.4	50	7.6	Pass	100.2	73.4	

DATA SHEET		Date	29-Sep-22
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	A.Mukai

1. Line conduction

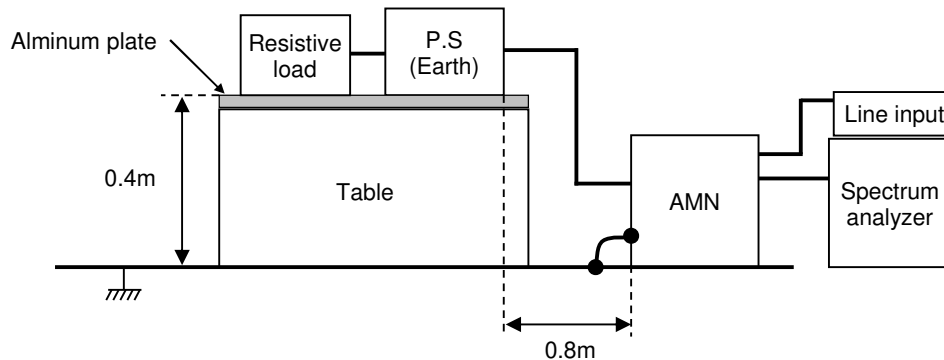

2. Radiated emission

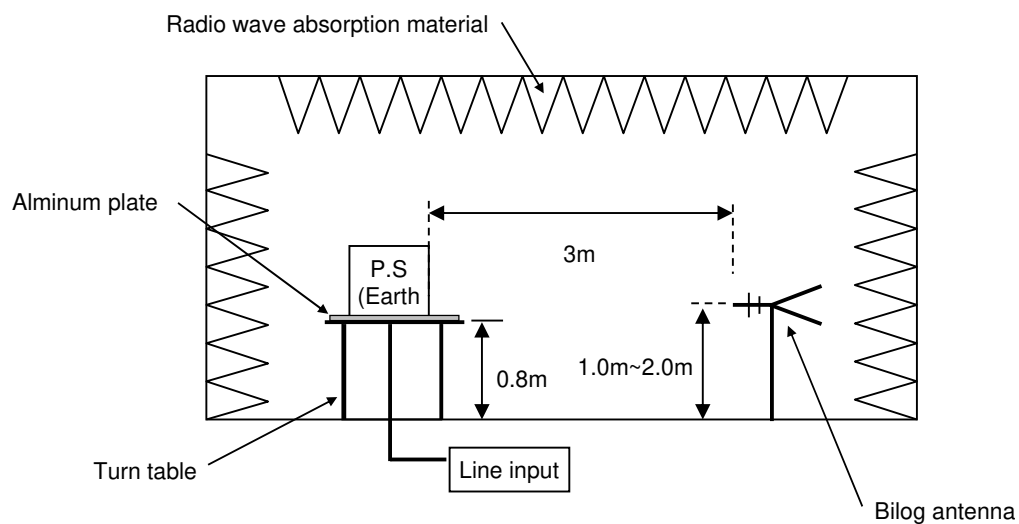

Conditions

Test : EMI
Model Name: PJMA1500F-12

○Photographs of Test Set-Up

1.LINE CONDUCTION


Fig.1 LINE CONDUCTION

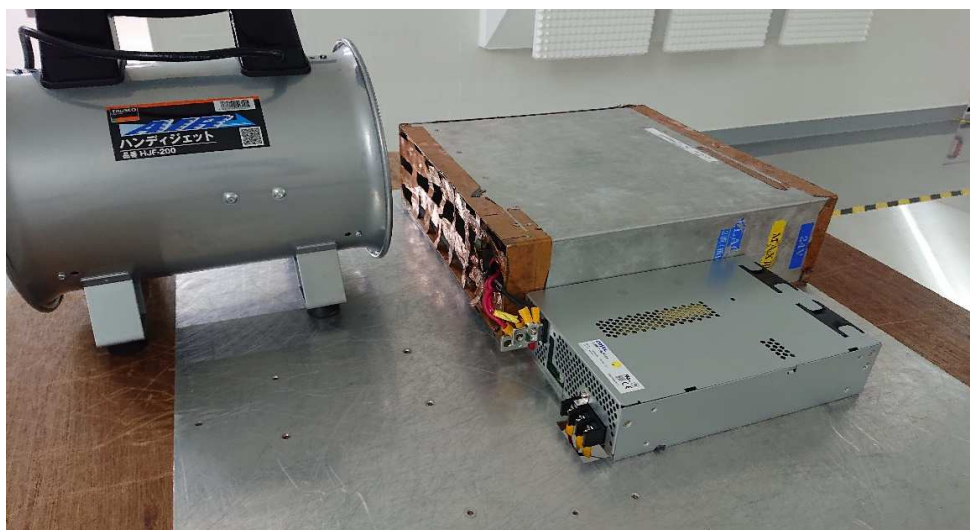
2.RADIATED EMISSION


Fig.2 RADIATED EMISSION