



DATA SHEET		Date	29-Sep-22
Model	PJMA1500F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	A.Mukai

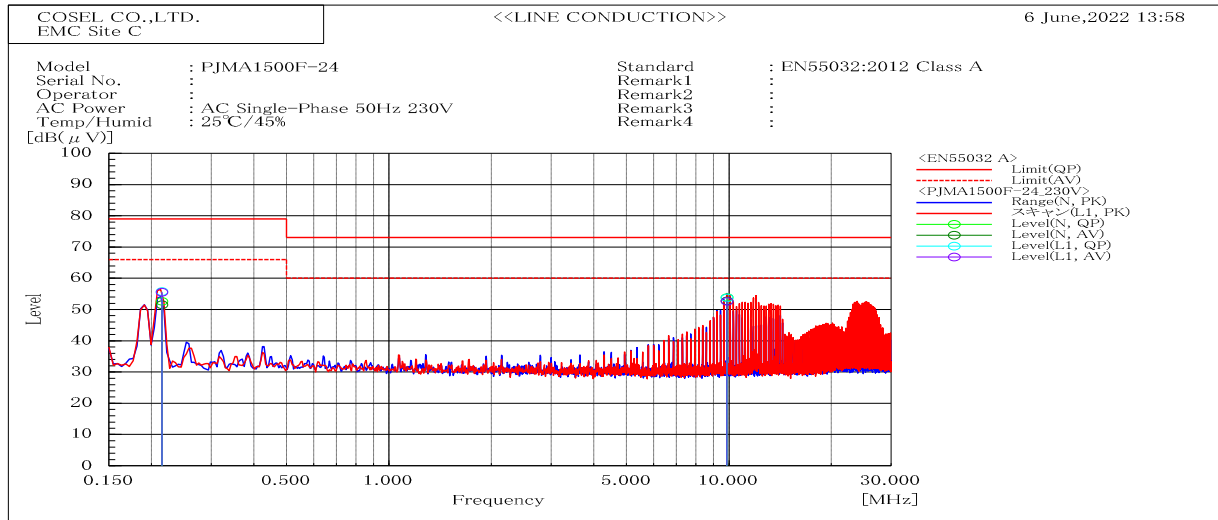


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.215	N	52.6	51.5	79	66	26.4	14.5	Pass	
0.215	L1	55.8	55.5	79	66	23.2	10.5	Pass	
9.876	N	53.9	52.8	73	60	19.1	7.2	Pass	
9.877	L1	53.8	52.7	73	60	19.2	7.3	Pass	

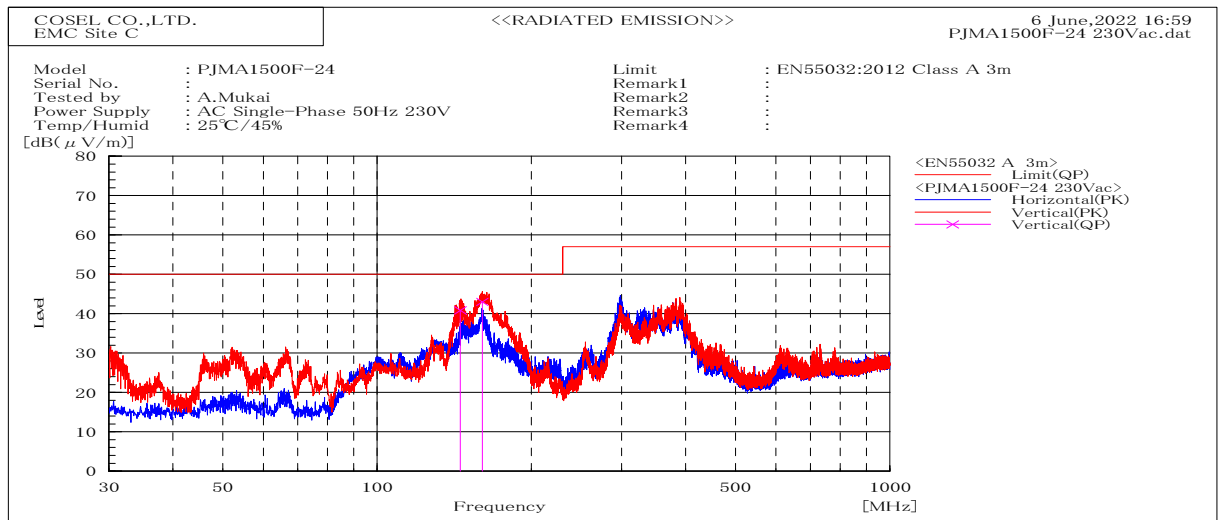


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB				
			QP	QP	QP				
145.377	V	Stable	40.8	50	9.2	Pass	100	0.9	
160.425	V	Stable	43	50	7	Pass	105.6	309.4	

DATA SHEET		Date	29-Sep-22
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	A.Mukai

1. Line conduction

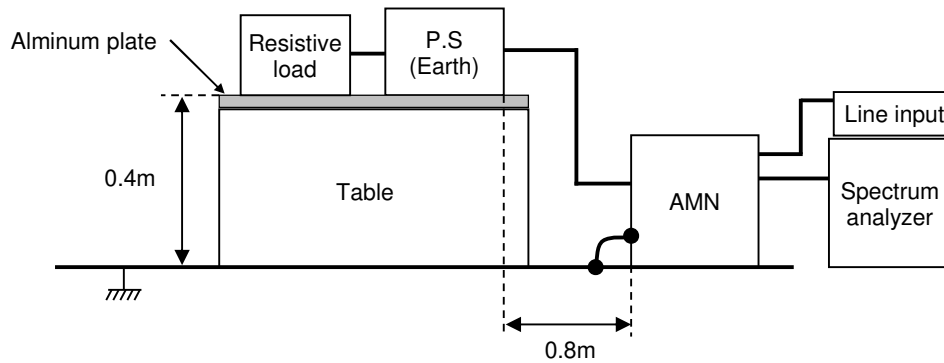

2. Radiated emission

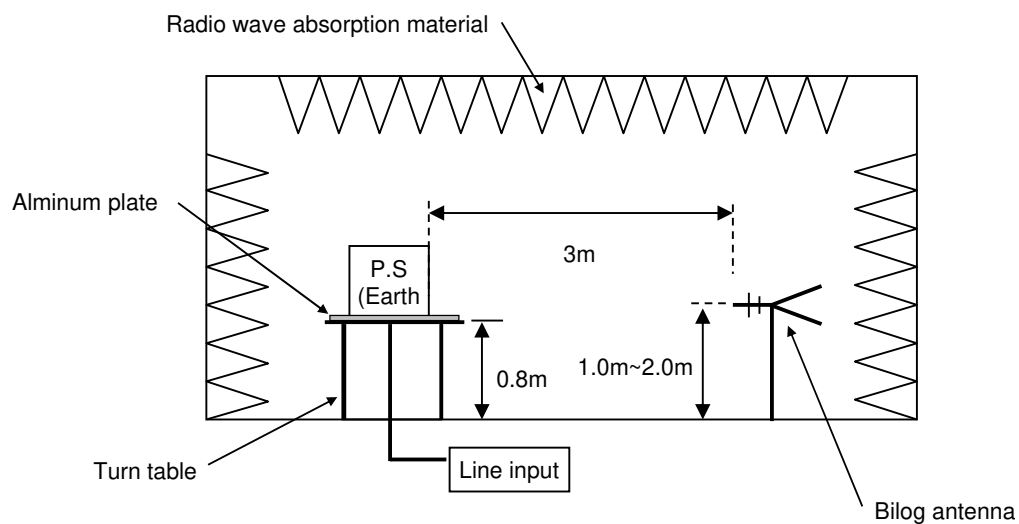

Conditions

Test : EMI
Model Name: PJMA1500F-24

○Photographs of Test Set-Up

1.LINE CONDUCTION



Fig.1 LINE CONDUCTION

2.RADIATED EMISSION

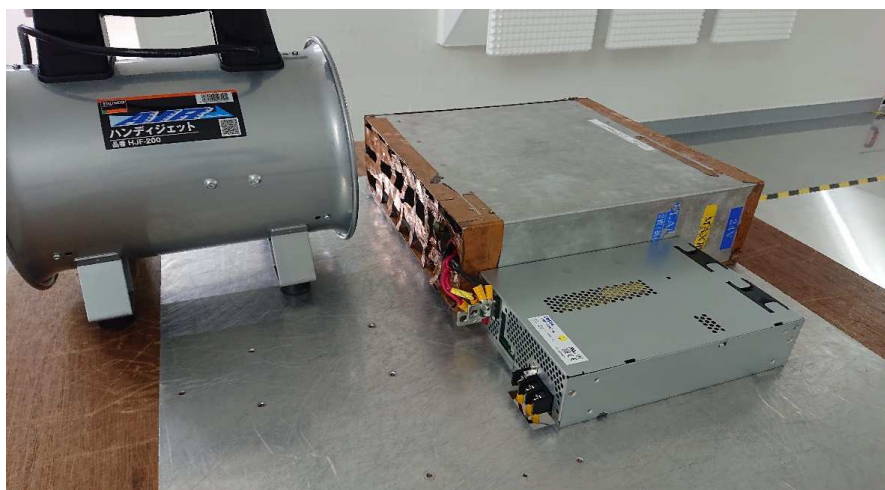


Fig.2 RADIATED EMISSION