



DATA SHEET		Date	21-Sep-21
Model	PJMA300F-24	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Mukai

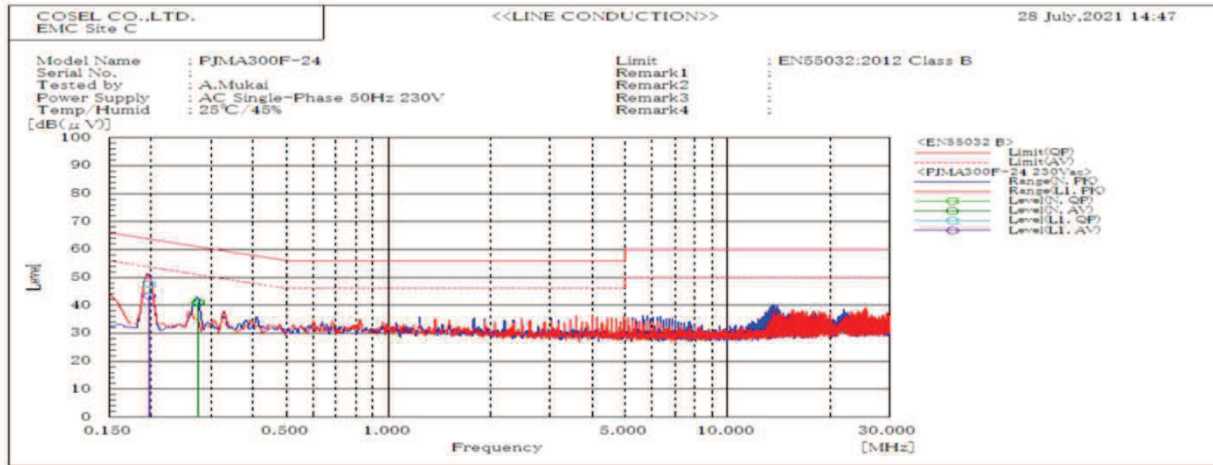


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.198	L1	47.7	43.4	63.7	53.7	16	10.3	Pass	
0.275	N	41.4	40.8	61	51	19.6	10.2	Pass	

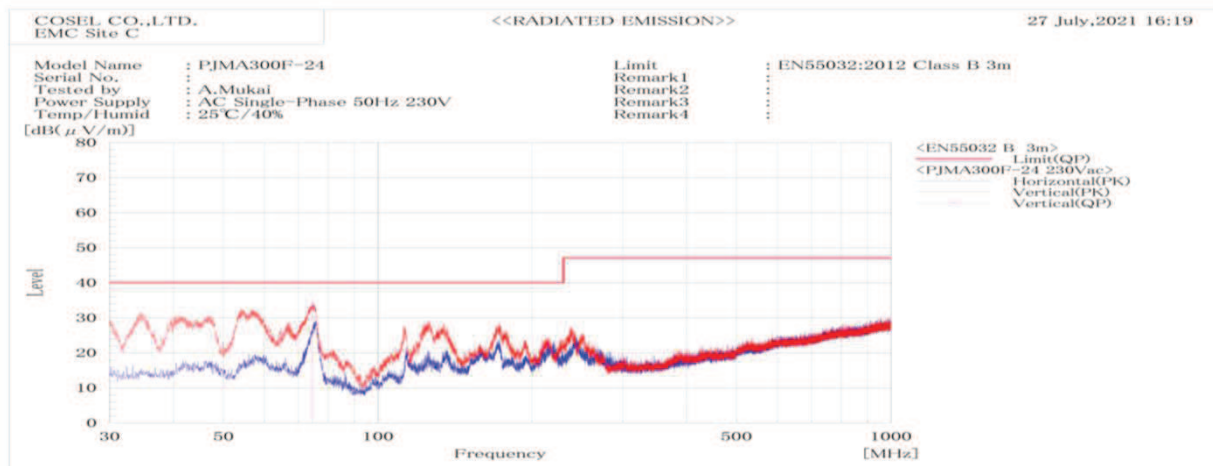


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB				
			QP	QP	QP				
74.589	V	Stable	33.5	40	6.5	Pass	100	350	

DATA SHEET		Date	21-Sep-21
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Mukai

1. Line conduction

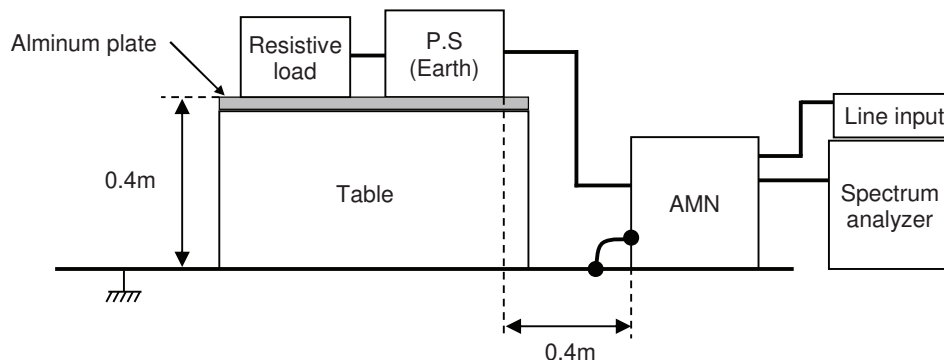

2. Radiated emission

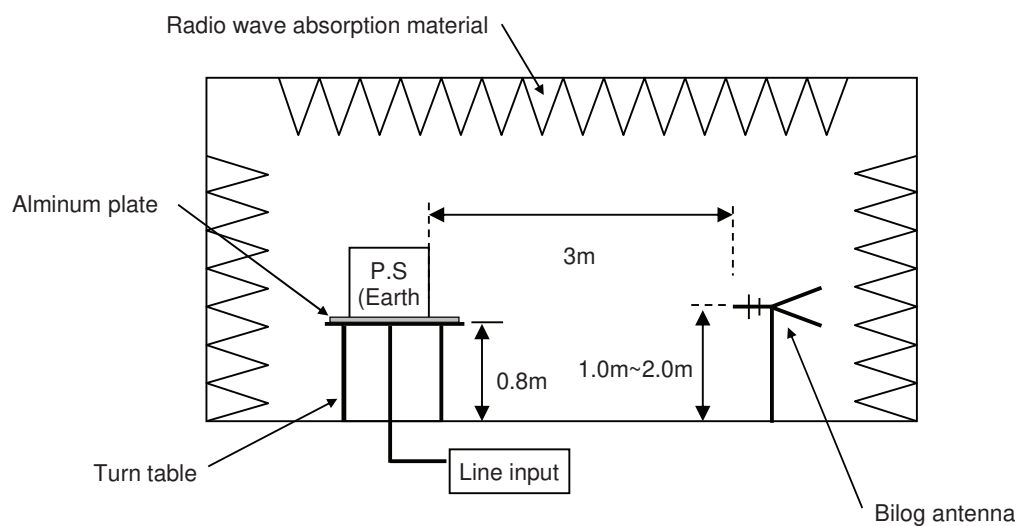

Conditions

Test : EMI
Model Name: PJMA300F-24

○Photographs of Test Set-Up

1.LINE CONDUCTION

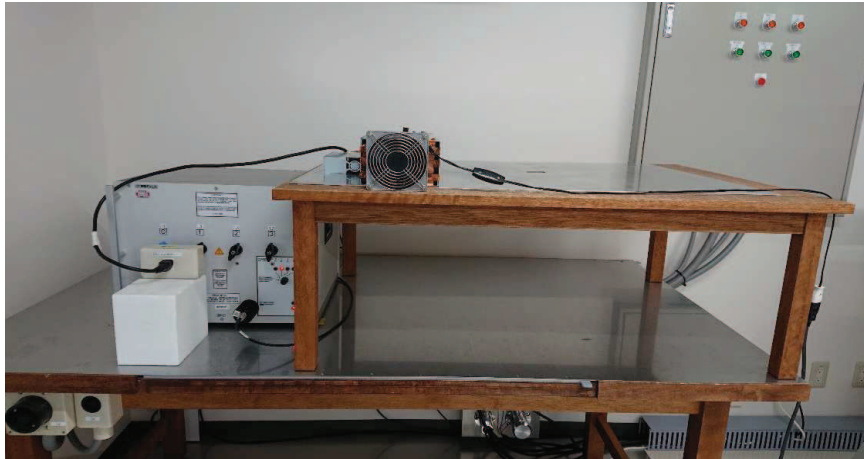


Fig.1 LINE CONDUCTION

2.RADIATED EMISSION

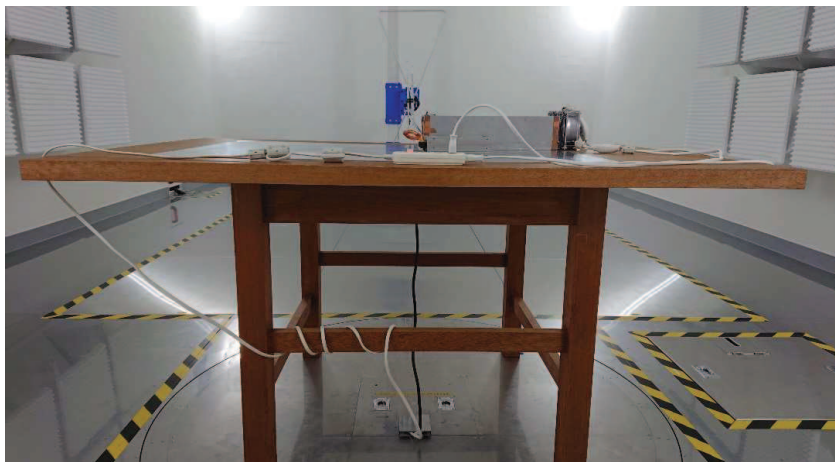


Fig.2 RADIATED EMISSION