



DATA SHEET		Date	21-Sep-21
Model	PJMA300F-36	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Mukai

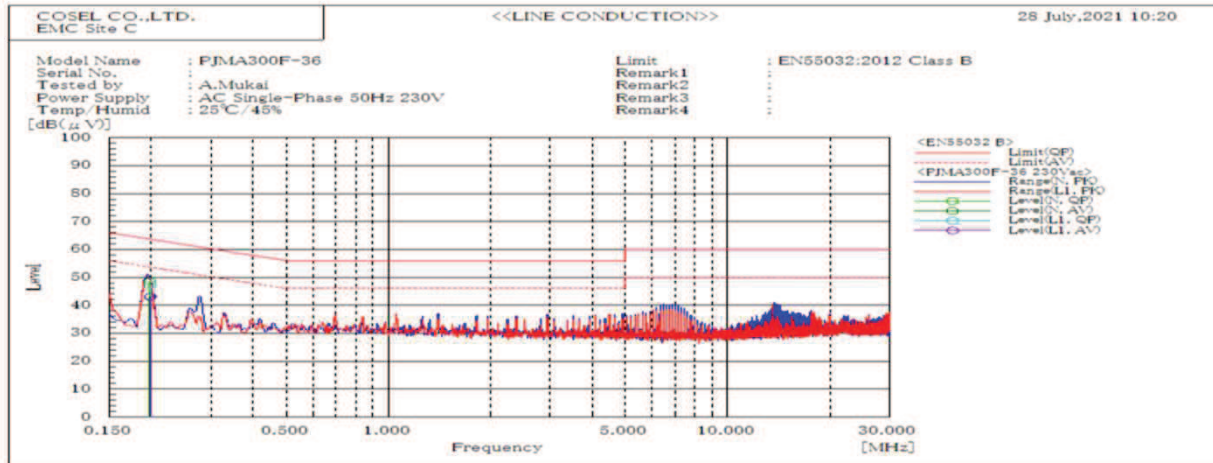


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.198	N	48.5	43	63.7	53.7	15.2	10.7	Pass	
0.199	L1	47.4	43.2	63.7	53.7	16.3	10.5	Pass	

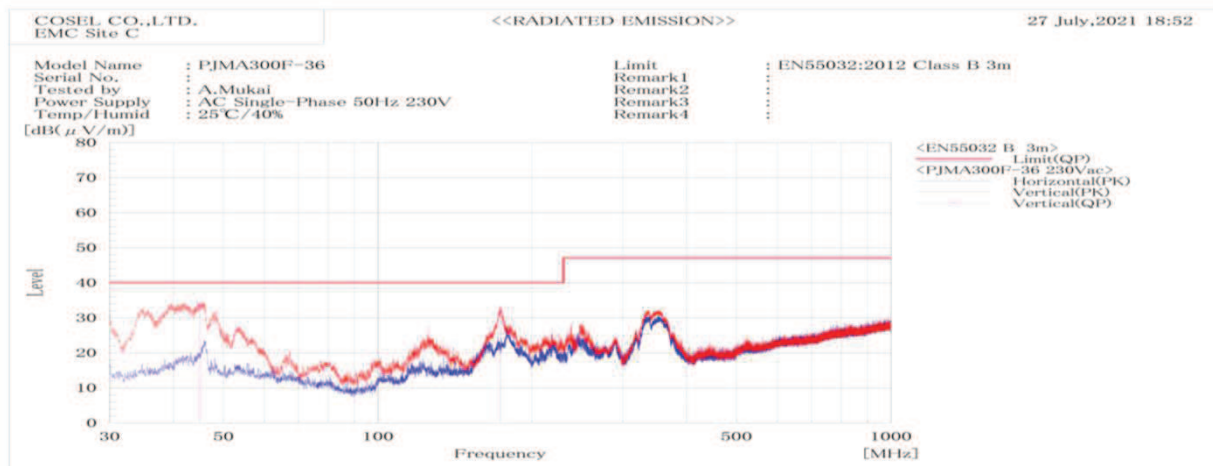


Frequency	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height	Angle	Remark
MHz			dB(μV/m)	dB(μV/m)	dB				
			QP	QP	QP		cm	deg	
44.91	V	Stable	33.8	40	6.2	Pass	101	29.4	
173.388	V	Stable	32.2	40	7.8	Pass	102.6	184.6	

DATA SHEET		Date	21-Sep-21
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	A.Mukai

### 1. Line conduction

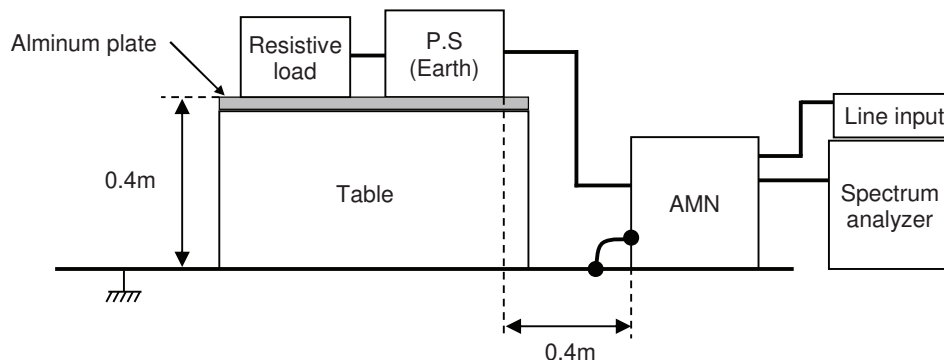

### 2. Radiated emission

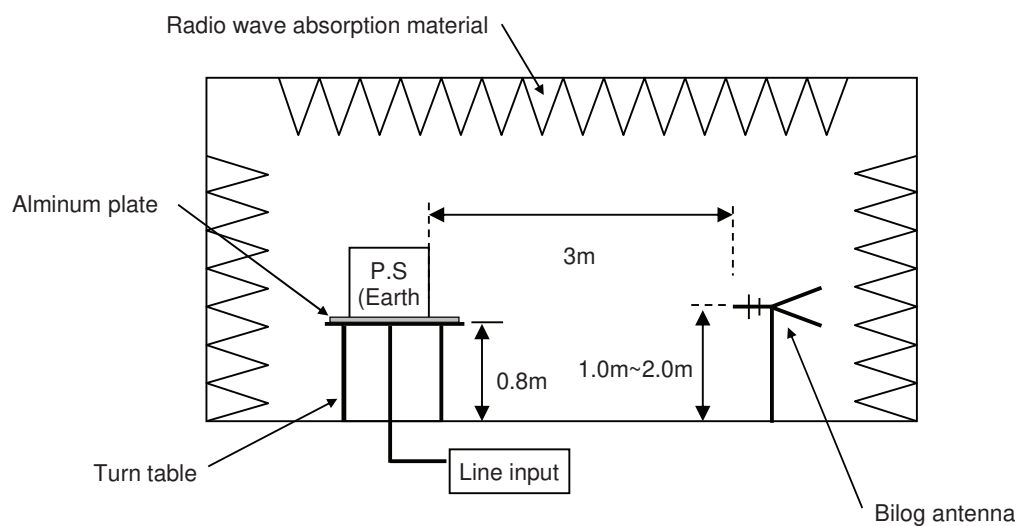

## Conditions

Test : EMI  
Model Name: PJMA300F-36

○Photographs of Test Set-Up

### 1.LINE CONDUCTION

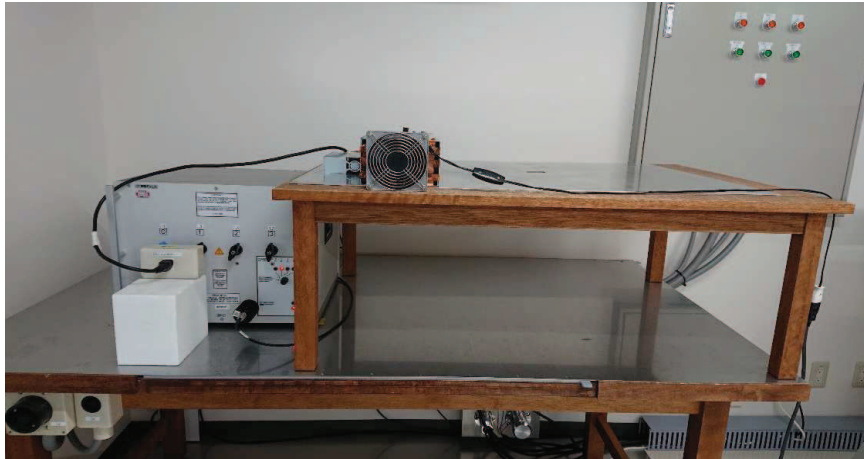


Fig.1 LINE CONDUCTION

### 2.RADIATED EMISSION

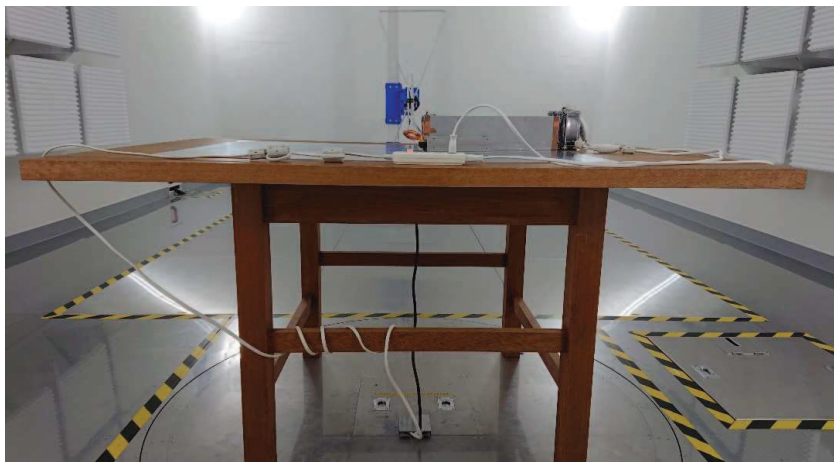


Fig.2 RADIATED EMISSION