



## DATA SHEET

Model		PLA100F-24	Date	31-May-13
Test		EMI Line conduction & Radiated emission	Temp.	25 degreeC
			Humid.	40 %RH
			Tested by	K.Murai

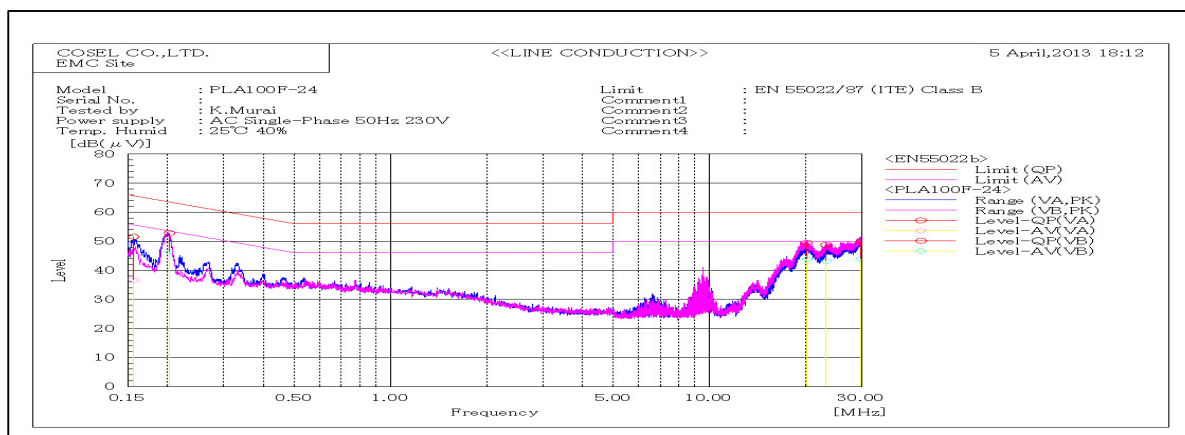


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.15644	LA	31.4	16.5	20.2	60.0	36.7	65.7	55.7	14.1	19.0	Pass	
0.20244	LB	32.7	26.4	20.1	52.8	46.5	63.5	53.5	10.7	7.0	Pass	
20.23125	LB	28.6	23.0	20.9	49.5	43.9	60.0	50	10.5	6.1	Pass	
23.18885	LB	27.8	22.4	20.9	48.7	43.3	60.0	50	11.3	6.7	Pass	
29.81485	LB	29.0	23.1	20.9	49.9	44.0	60.0	50	10.1	6.0	Pass	

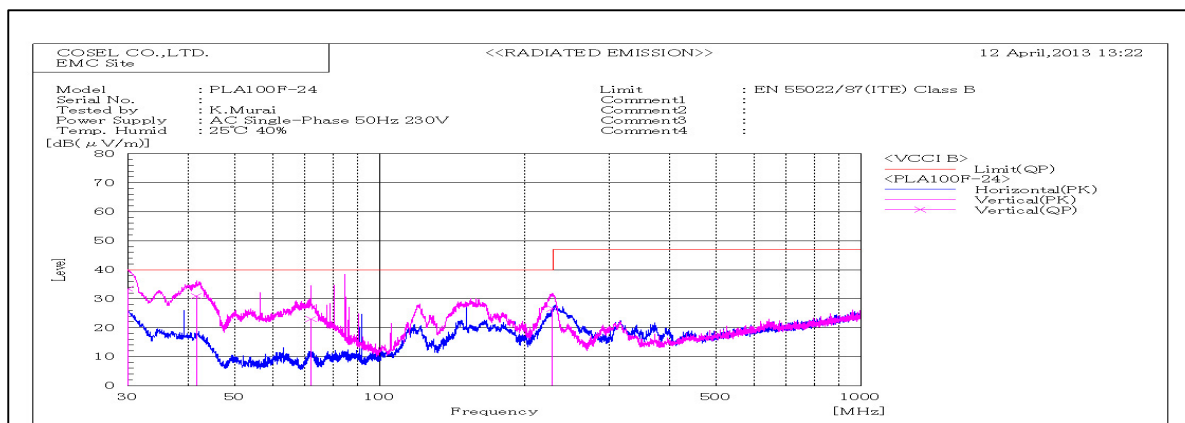

Frequency MHz	Polariz ation	Stabili ty	Readin g dB(μV)		Space Loss dB	Level dB(m V)		Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
			QP	AV		QP	AV					
30.017	V	Stable	46.9	-13.4		33.5	40	6.5	Pass	106	195	
41.68965	V	Stable	47.0	-16.1		30.9	40	9.1	Pass	117	351	
72.08505	V	Stable	43.4	-20.4		23.0	40	17.0	Pass	138	8	
228.466	V	Stable	42.1	-15.5		26.6	40	13.4	Pass	110	261	

DATA SHEET		Date	31-May-13
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Murai

## 1. Line conduction

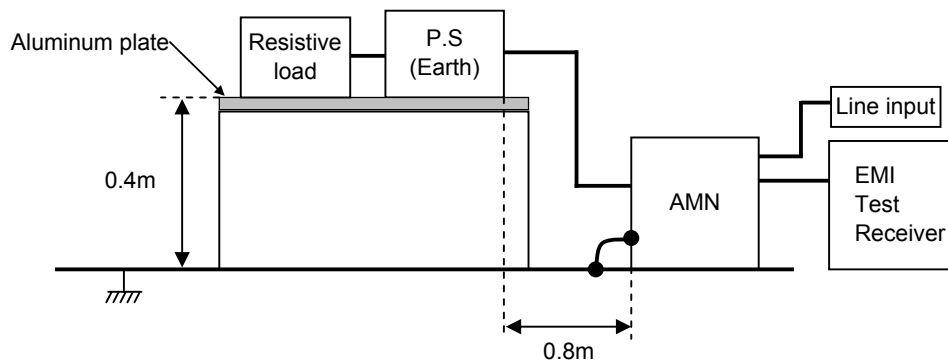

## 2. Radiated emission

