



DATA SHEET		Date	24-Jun-13
Model	PLA150F-15	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Murai

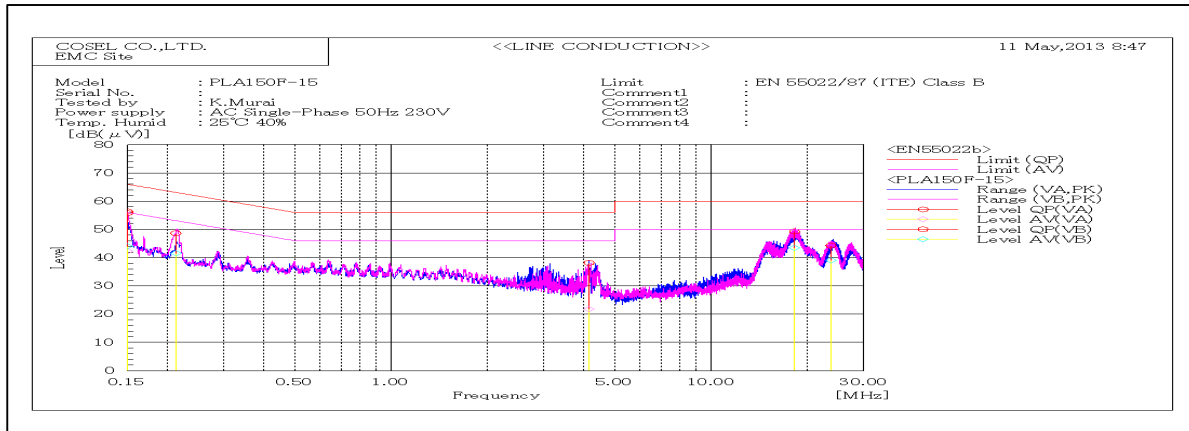


Frequency MHz	Line Phase	Reading dB(uV)		Factor dB	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.15018	LB	36.2	23.8	20.2	56.4	44	66	56	9.6	12	Pass	
0.15021	LA	35.6	22.1	20.2	55.8	42.3	66	56	10.2	13.7	Pass	
0.21249	LB	28.5	21.5	20.1	48.6	41.6	63.1	53.1	14.5	11.5	Pass	
4.15842	LA	17.9	1.6	20.2	38.1	21.8	56	46	17.9	24.2	Pass	
18.23035	LB	28.4	20.8	20.8	49.2	43.4	60	50	10.8	6.6	Pass	
23.6879	LB	23.4	20.9	20.9	44.3	39	60	50	15.7	11	Pass	

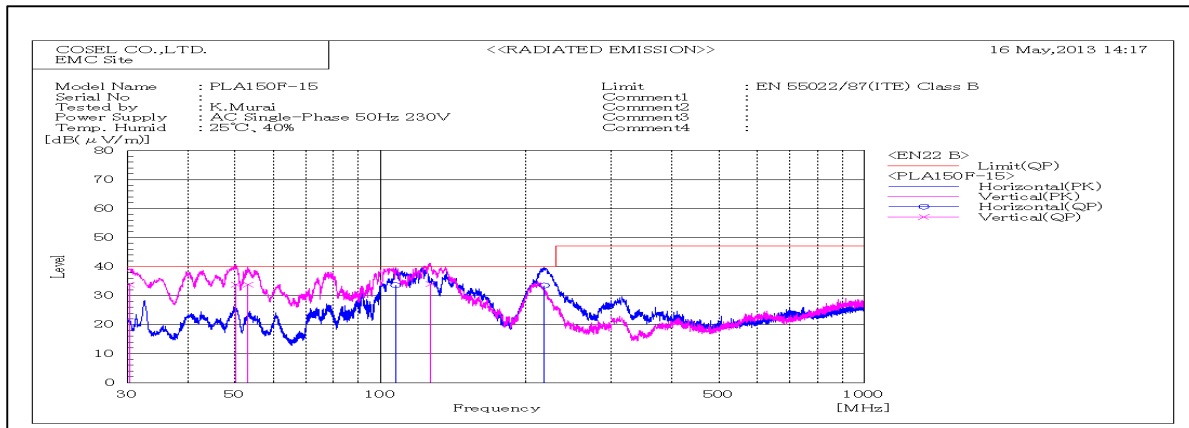

Frequency MHz	Polarization	Stability	Reading dB(uV)	Space Loss dB	Level dB(mW)	Limit dB(mW)	Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
			QP		QP	QP					
30.252	V	Stable	50.9	-17.1	33.8	40	6.2	Pass	99	186	
50.223	V	Stable	48.6	-14.8	33.8	40	6.2	Pass	104	177	
53.196	V	Stable	48.8	-15	33.8	40	6.2	Pass	101	284	
107.458	H	Stable	49.7	-16.1	33.6	40	6.4	Pass	167	76	
126.811	V	Stable	49.1	-15.1	34	40	6	Pass	99	222	
218.059	H	Stable	49.8	-16.3	33.5	40	6.5	Pass	141	258	

DATA SHEET		Date	24-Jun-13
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	K.Murai

## 1. Line conduction

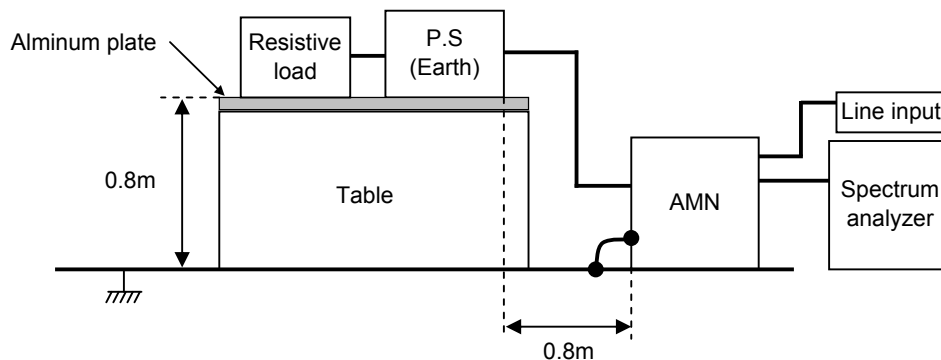

## 2. Radiated emission

