



DATA SHEET		Date	10-Aug-11
Model	PLA300F-12	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Oki

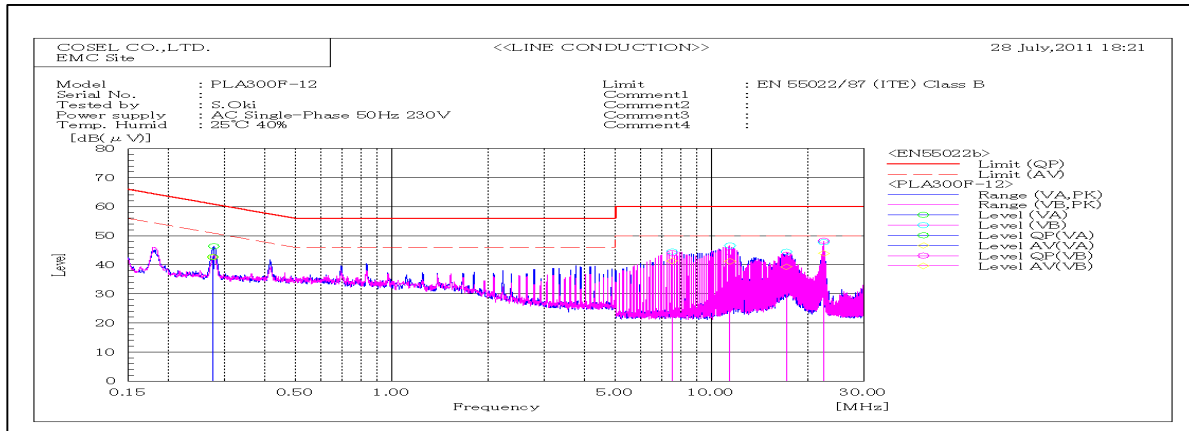


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.27561	VA	32.5	32.5	10.2	42.7	42.7	60.9	50.9	18.2	8.2	Pass	
7.51942	VB	33.2	30.5	10.8	44	41.3	60	50	16	8.7	Pass	
11.41615	VB	33.4	30.4	10.9	44.3	41.3	60	50	15.7	8.7	Pass	
17.132	VB	32.2	28.1	11.2	43.4	39.3	60	50	16.6	10.7	Pass	
22.4215	VB	36.9	32.6	11.4	48.3	44	60	50	11.7	6	Pass	

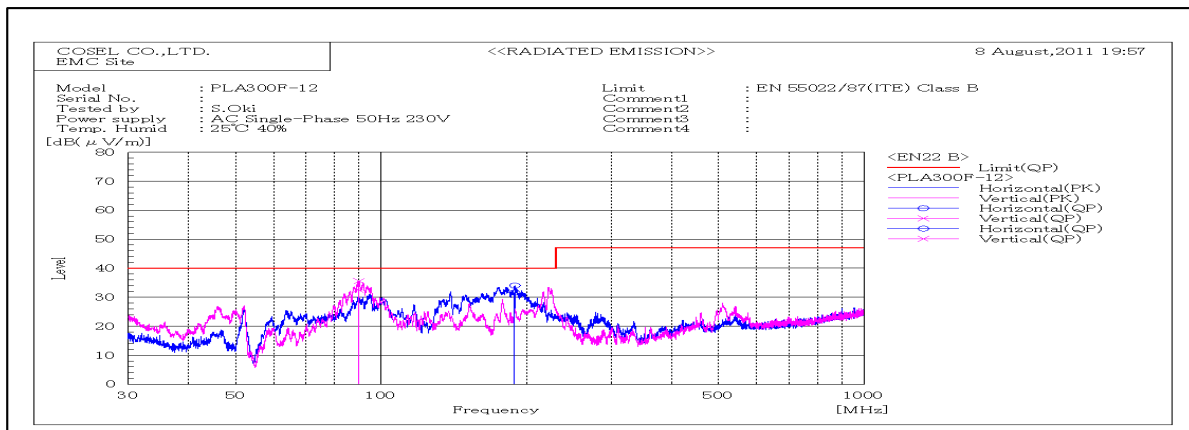

Frequency MHz	Polariz ation	Stabili ty	Readi ng dB(μV)	Space Loss dB	Level dB(m W)	Limit dB(mW)	Margi n dB	Pass/ Fail	Height cm	Angle deg	Remark
			QP		QP	QP					
89.726	V	Stable	51.9	-19.3	32.6	40	7.4	Pass	115	157	
189.158	H	Stable	49.9	-18.3	31.6	40	8.4	Pass	155	327	

DATA SHEET		Date	10-Aug-11
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Oki

1. Line conduction

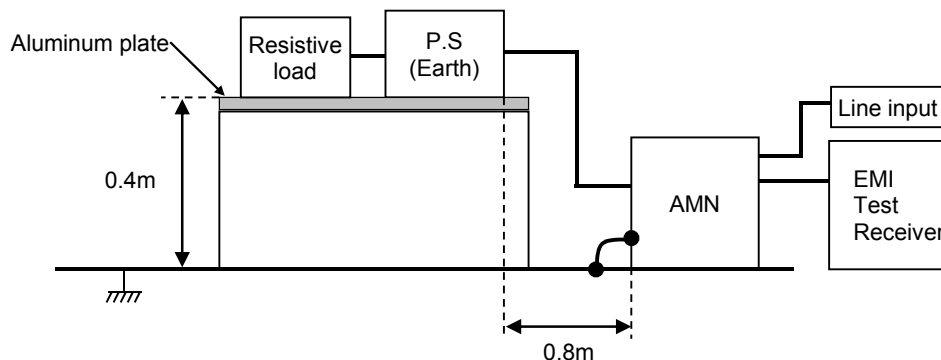

2. Radiated emission

