



## DATA SHEET

		Date	10-Aug-11
Model	PLA300F-15	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Oki

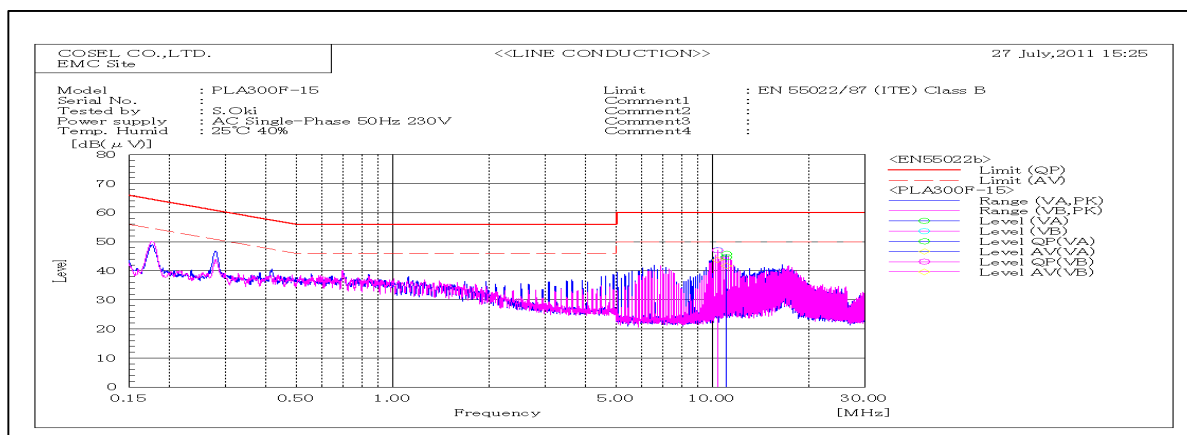


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
10.36635	VB	36.2	32.9	10.9	47.1	43.8	60	50	12.9	6.2	Pass	
11.0683	VA	33.7	30.7	11	44.7	41.7	60	50	15.3	8.3	Pass	

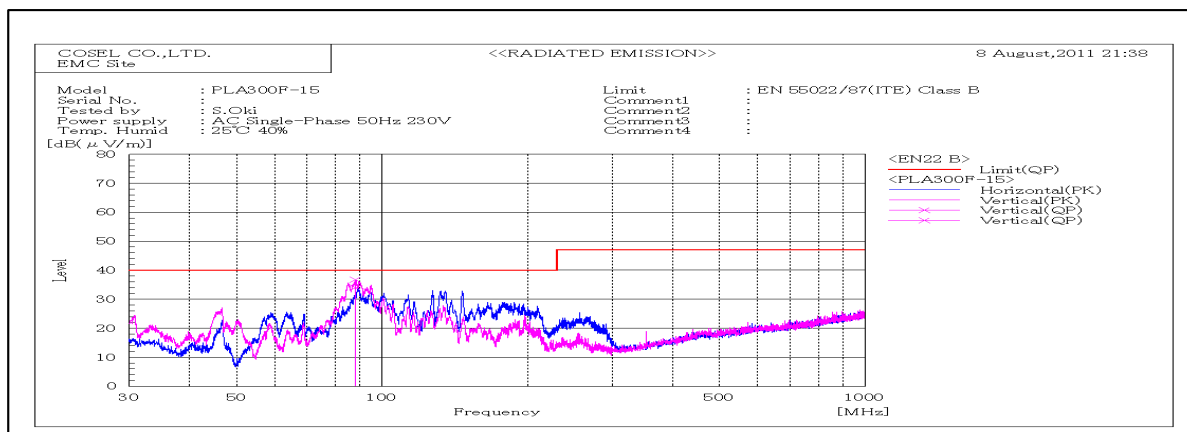

Frequency MHz	Polarization	Stability	Reading dB(μV)	Space Loss dB	Level dB(mW)	Limit dB(mW)	Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
			QP		QP	QP					
88.104	V	Stable	53.5	-19.5	34	40	6	Pass	140	230	

DATA SHEET		Date	10-Aug-11
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Oki

### 1. Line conduction

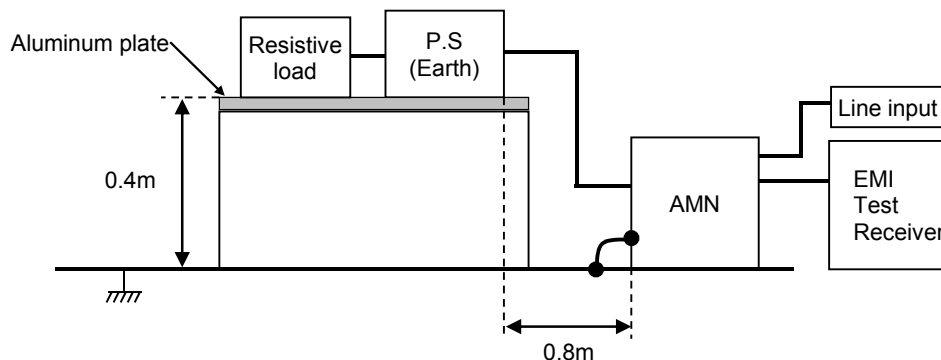

### 2. Radiated emission

