



DATA SHEET		Date	10-Aug-11
Model	PLA300F-36	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Oki

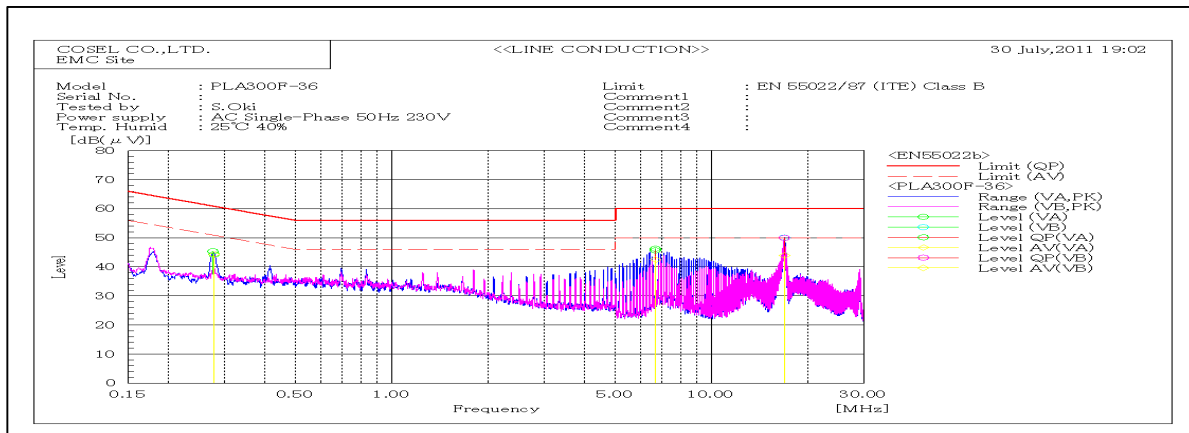


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.27818	VA	34.1	34.1	10.2	44.3	44.3	60.9	50.9	16.6	6.6	Pass	
6.67481	VA	35	31.8	10.7	45.7	42.5	60	50	14.3	7.5	Pass	
16.8791	VB	38.8	32.7	11.2	50	43.9	60	50	10	6.1	Pass	

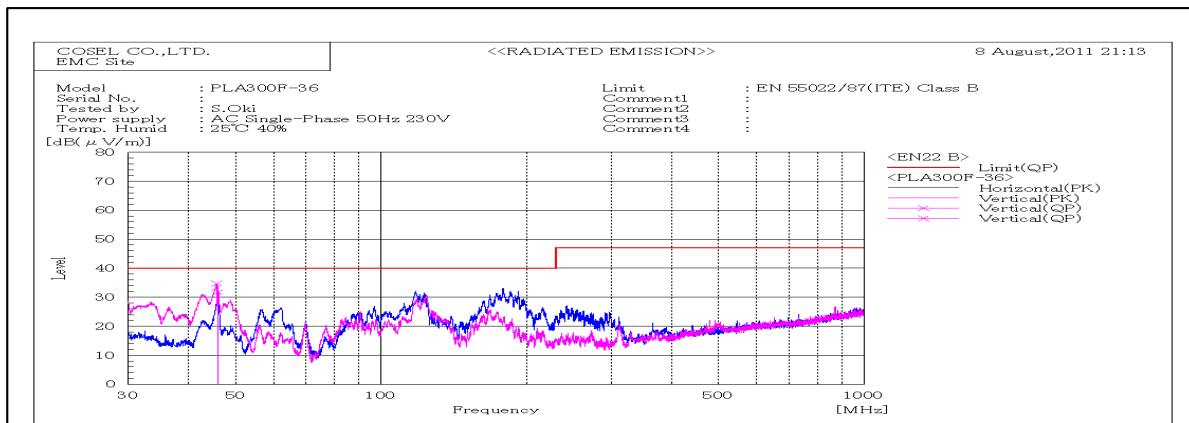

Frequency MHz	Polarization	Stability	Reading dB(μV)	Space Loss dB	Level dB(mW)	Limit dB(mW)	Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
			QP		QP	QP					
45.944	V	Stable	49.7	-18	31.7	40	8.3	Pass	143	150	

DATA SHEET		Date	10-Aug-11
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Oki

1. Line conduction

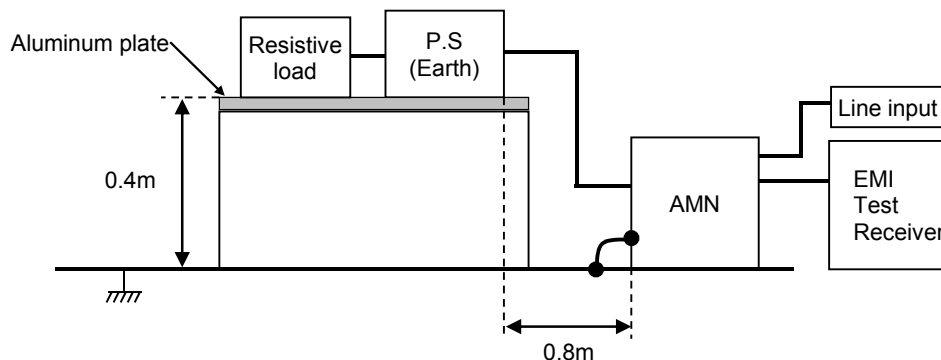

2. Radiated emission

