



## DATA SHEET

Model		PLA300F-48	Date	10-Aug-11
Test		EMI Line conduction & Radiated emission	Temp.	25 degreeC
			Humid.	40 %RH
			Tested by	S.Oki

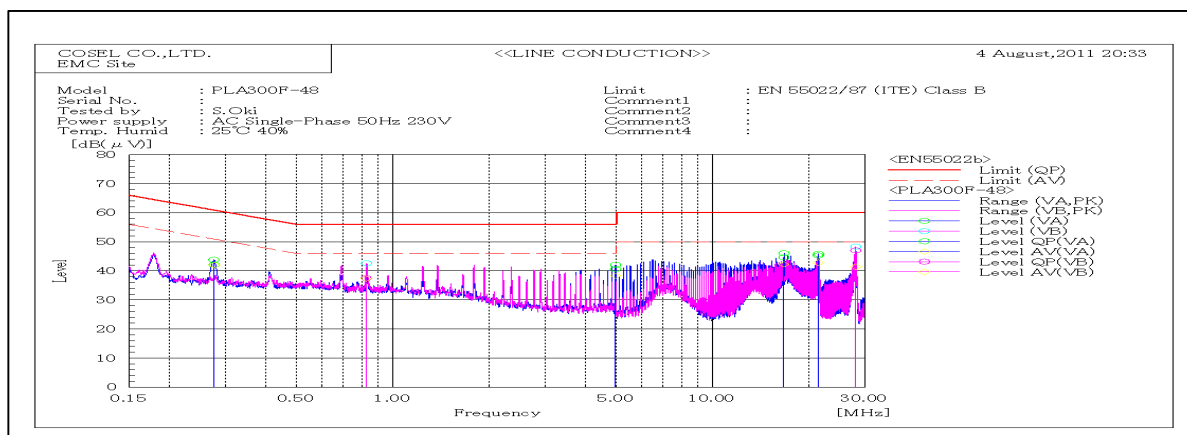


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.27634	VA	31.9	31.8	10.2	42.1	42	60.9	50.9	18.8	8.9	Pass	
0.82584	VB	27.3	27.2	10.2	37.5	37.4	56	46	18.5	8.6	Pass	
4.9749	VA	30.1	27.8	10.6	40.7	38.4	56	46	15.3	7.6	Pass	
16.7256	VA	33.3	30.9	11.3	44.6	42.2	60	50	15.4	7.8	Pass	
21.43085	VA	33.9	31.4	11.4	45.3	42.8	60	50	14.7	7.2	Pass	
28.0681	VB	35.7	30.1	11.3	47	41.4	60	50	13	8.6	Pass	

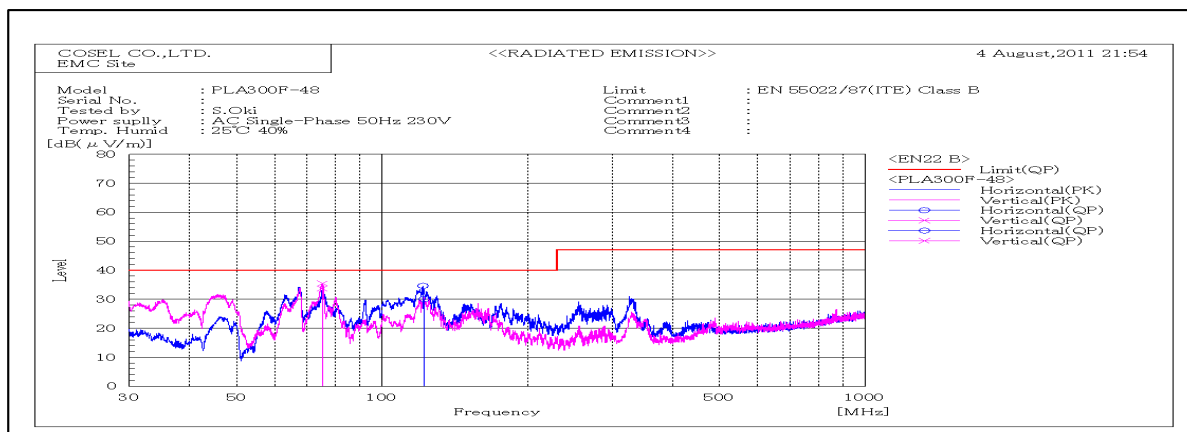

Frequency MHz	Polarization	Stability	Reading dB(μV)	Space Loss dB	Level dB(mW)	Limit dB(mW)	Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
			QP		QP	QP	QP				
75.233	V	Stable	54.9	-21.2	33.7	40	6.3	Pass	140	71	
122.254	H	Stable	46.1	-16.1	30	40	10	Pass	148	2	

DATA SHEET		Date	10-Aug-11
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Oki

## 1. Line conduction

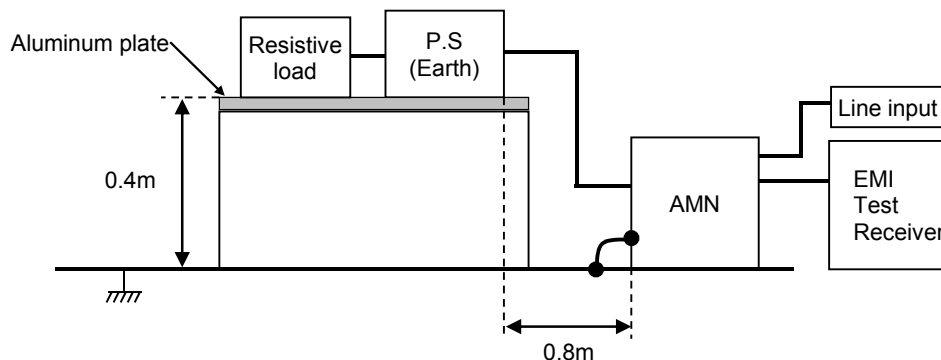

## 2. Radiated emission

