



DATA SHEET		Date	10-Aug-11
Model	PLA300F-5	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	S.Oki

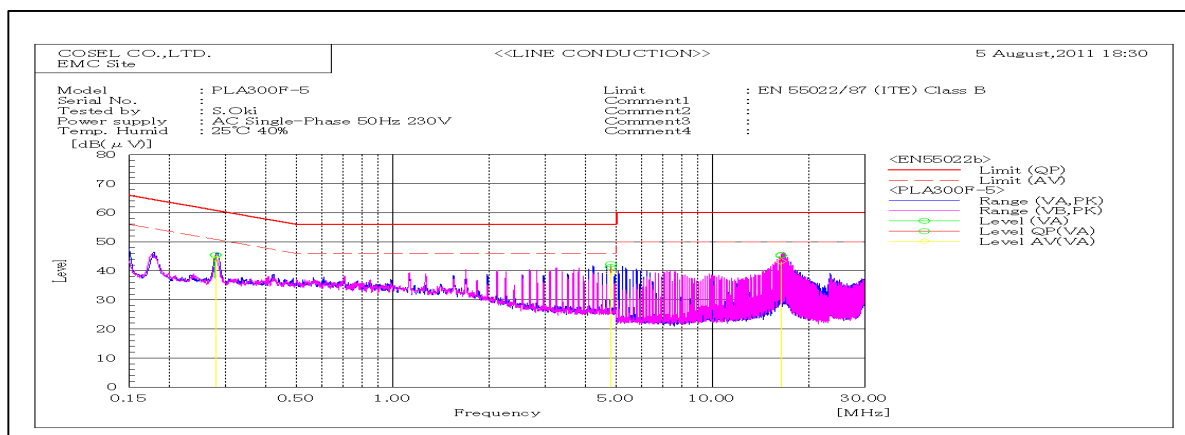


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.28006	VA	35.5	34.1	10	45.5	44.1	60.8	50.8	15.3	6.7	Pass	
4.80169	VA	31	29.1	10.3	41.3	39.4	56	46	14.7	6.6	Pass	
16.3773	VA	34.7	32.5	10.8	45.5	43.3	60	50	14.5	6.7	Pass	

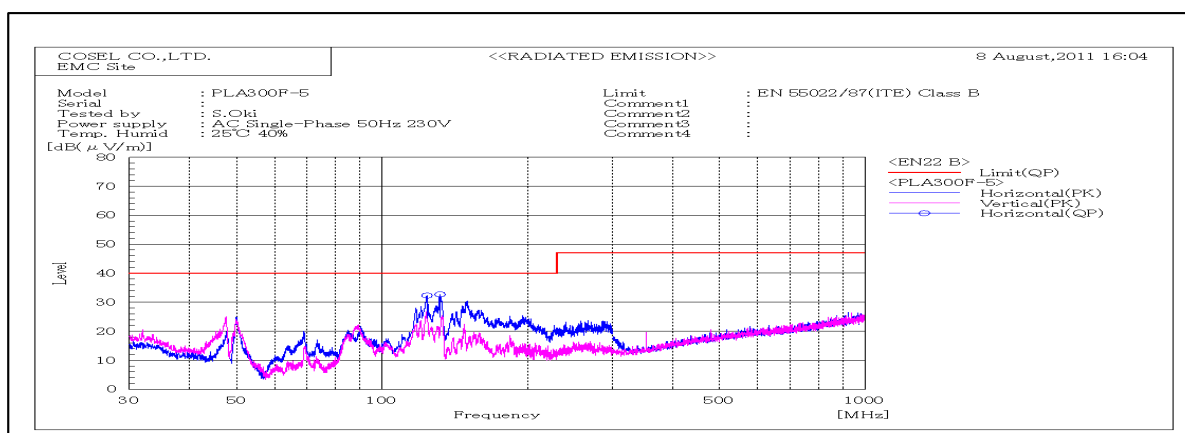

Frequency MHz	Polarization	Reading dB(μV)	Space Loss dB	Level dB(mW)	Limit dB(mW)		Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
					QP	QP					
131.9	H	49	-16.3	32.7	40	7.3	Pass	159	0		
124	H	48.4	-16.1	32.3	40	7.7	Pass	159	21		

DATA SHEET		Date	10-Aug-11
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI	Humid.	40 %RH
	Line conduction & Radiated emission	Tested by	S.Oki

1. Line conduction

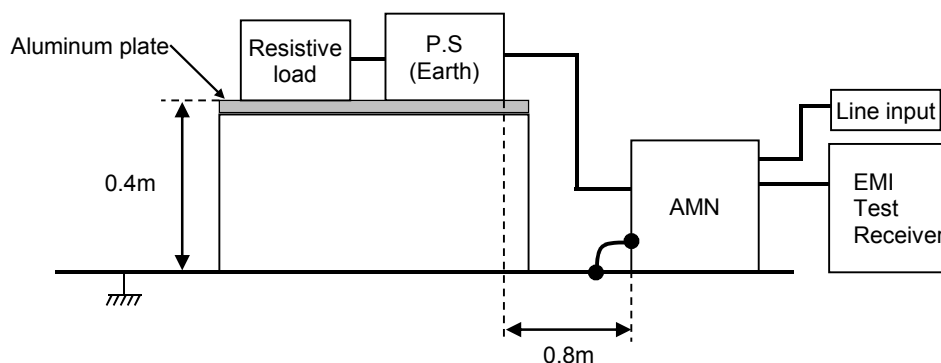

2. Radiated emission

