





DATA SHEET		Date	02-Jul-14
Model	PLA50F-5	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Sugimori

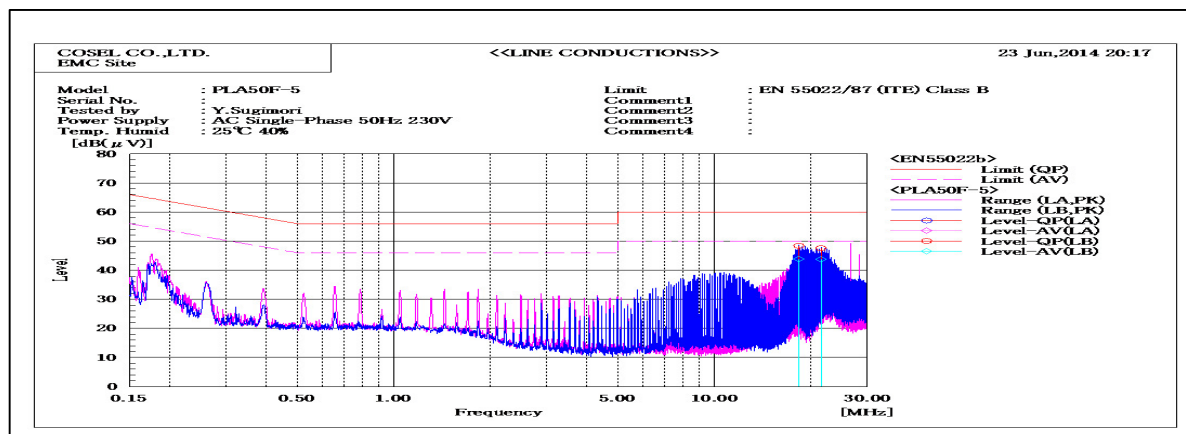


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
18.376	LA	32.7	32.1	11.7	44.4	43.8	60	50	15.6	6.2	Pass	
18.37435	LB	37	32.5	11.4	48.4	43.9	60	50	11.6	6.1	Pass	
21.5259	LB	37	33.2	10.6	47.6	43.8	60	50	12.4	6.2	Pass	

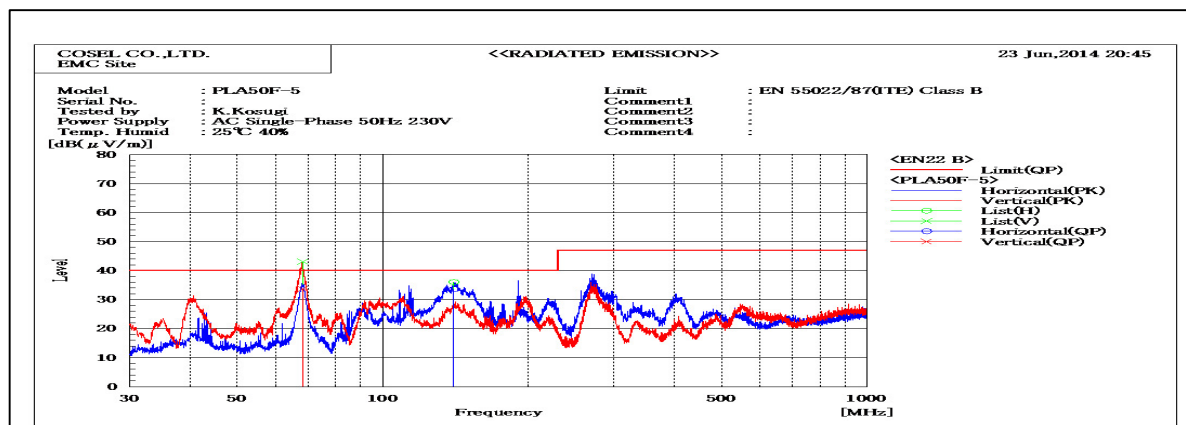

Frequency MHz	Polarization	Reading dB(μV)	Space Loss dB	Level dB(mW)	Limit dB(mW)	Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
		QP		QP	QP	QP				
68.189	V	50.7	-17	33.7	40	6.3	Pass	99	0	
140.105	H	44.8	-11.2	33.6	40	6.4	Pass	200	215	

DATA SHEET		Date	02-Jul-14
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	Y.Sugimori

### 1. Line conduction

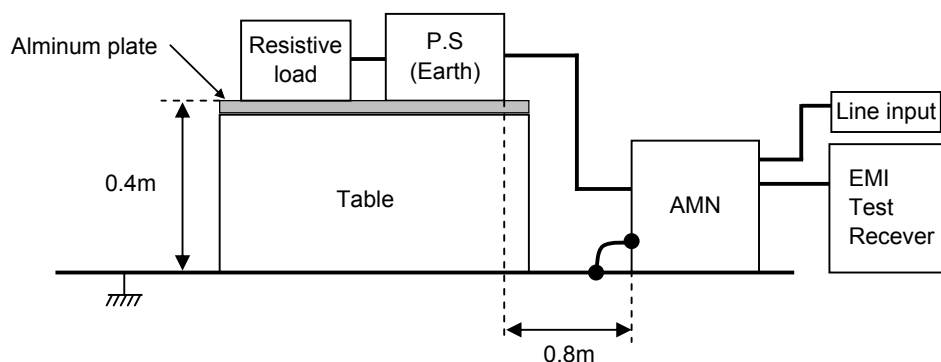

### 2. Radiated emission

