

DATA SHEET

Model PLA600F-24


Date 10-Aug-11

Test EMI
Line conduction & Radiated emission


Temp. 25 degreeC

Humid. 40 %RH

Tested by K.Takami

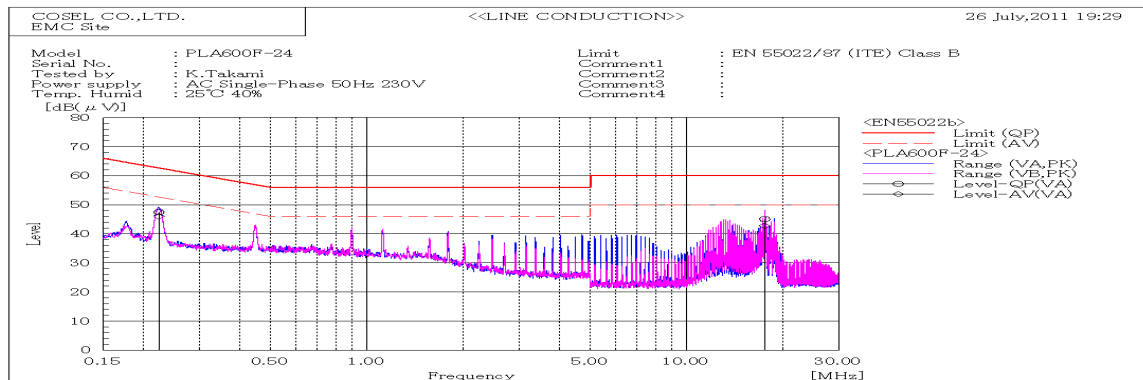


Frequency MHz	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
17.56425	VA	34.2	31.9	10.9	45.1	42.8	60	50	14.9	7.2	Pass	
0.22393	VA	37.4	36	10.1	47.5	46.1	62.7	52.7	15.2	6.6	Pass	

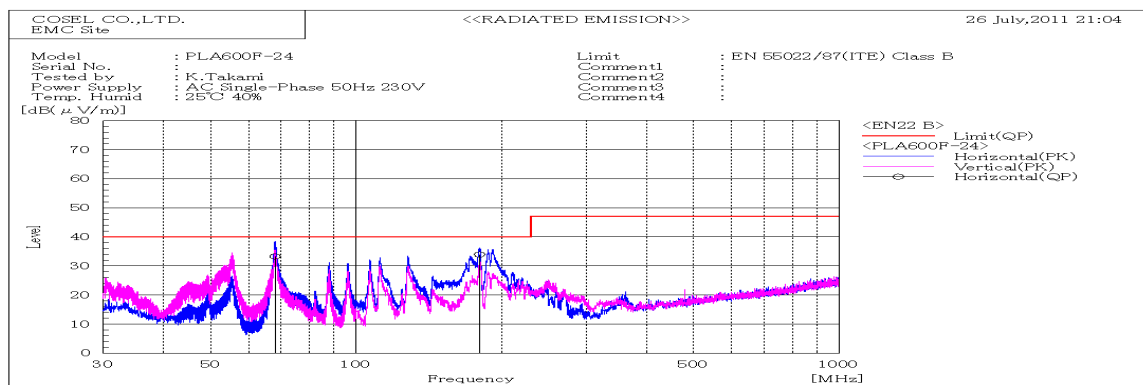

Frequency MHz	Polariz ation	Reading dB(μV)	Space Loss dB	Level dB(mW)	Limit dB(mW)	Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
				QP	QP					
180.192	H	52.3	-18.4	33.9	40	6.1	Pass	154	176	
67.969	H	55.3	-22	33.3	40	6.7	Pass	148	240	

DATA SHEET		Date	10-Aug-11
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	K.Takami

1. Line conduction

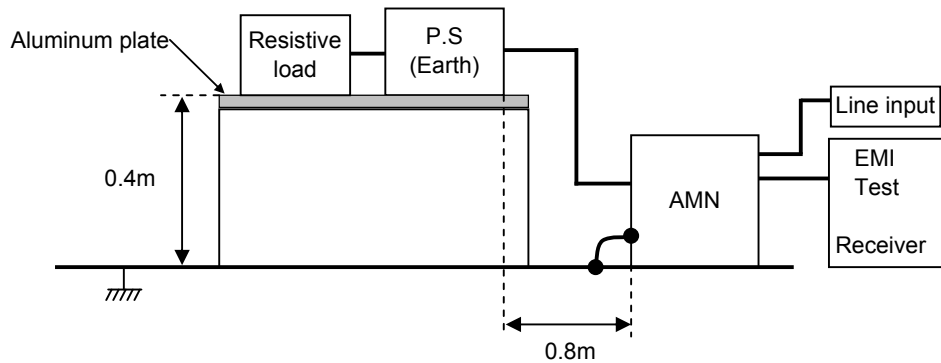

2. Radiated emission

