
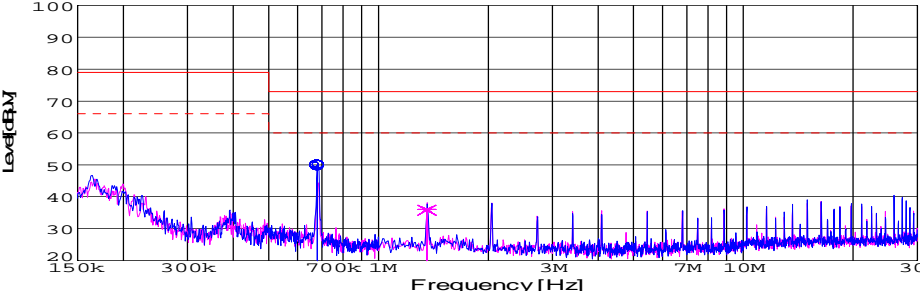
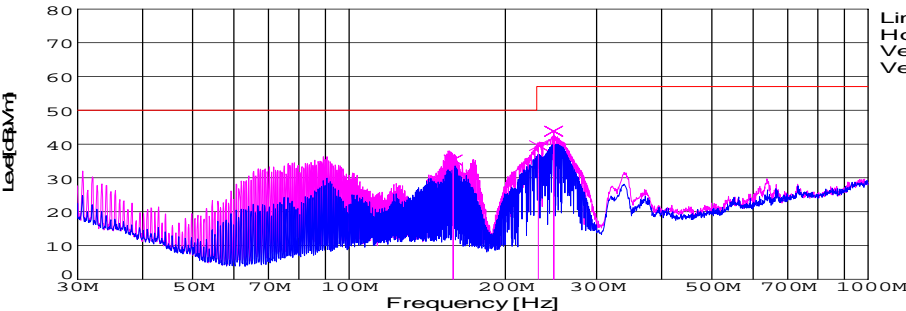


DATA SHEET							Date	20-Jun-07																																														
Model	SFLS104805						Temp.	25 degreeC																																														
Test	EMI Line conduction & Radiated emission						Humid.	45 %RH																																														
							Tested by	K.ISHIBASHI																																														
LINE CONDUCTION																																																						
Model Name : SFLS104805				Temp. : 25																																																		
Model No. :				Humi. : 45																																																		
Serial No. :				Date : 2007/6/20 15:38																																																		
Points : 2				Test Equip. : R3132,ESPC																																																		
Detector : PEAK/QP/Ave.				Comment : K.ISHIBASHI																																																		
Line Mode : VA/VB				Vin =48V																																																		
Power Supply : DC48V				Io=2A																																																		
Limit1: [CISPR Pub11] Class A Gr.1(QP)																																																						
Limit2: [CISPR Pub11] Class A Gr.1(Ave.)																																																						
							Limit1(QP)		—																																													
							Limit2(Ave.)		- - -																																													
							VA(PEAK)		—																																													
							VB(PEAK)		—																																													
							VA(QP)		○																																													
							VA(Ave.)		⊗																																													
							VB(QP)		×																																													
							VB(Ave.)		+																																													
							Vin =48V																																															
							Io=2A																																															
<table><tr><th>Frequency [MHz]</th><th>Meter Reading (Ave.)[dBuV]</th><th>Meter Reading (QP)[dBuV]</th><th>Factor [dB]</th><th>Level(Ave.) [dBuV]</th><th>Level(QP) [dBuV]</th><th>Line</th><th>Limit(Ave.) [dBuV]</th><th>Limit(QP) [dBuV]</th><th>Margin(Ave.) [dB]</th><th>Margin(QP) [dB]</th></tr><tr><td>0.6806</td><td>40.1</td><td>39.8</td><td>9.9</td><td>50</td><td>49.7</td><td>VA</td><td>60</td><td>73</td><td>10</td><td>23.3</td></tr><tr><td>1.3579</td><td>26.1</td><td>25.9</td><td>9.9</td><td>36</td><td>35.8</td><td>VB</td><td>60</td><td>73</td><td>24</td><td>37.2</td></tr></table>											Frequency [MHz]	Meter Reading (Ave.)[dBuV]	Meter Reading (QP)[dBuV]	Factor [dB]	Level(Ave.) [dBuV]	Level(QP) [dBuV]	Line	Limit(Ave.) [dBuV]	Limit(QP) [dBuV]	Margin(Ave.) [dB]	Margin(QP) [dB]	0.6806	40.1	39.8	9.9	50	49.7	VA	60	73	10	23.3	1.3579	26.1	25.9	9.9	36	35.8	VB	60	73	24	37.2											
Frequency [MHz]	Meter Reading (Ave.)[dBuV]	Meter Reading (QP)[dBuV]	Factor [dB]	Level(Ave.) [dBuV]	Level(QP) [dBuV]	Line	Limit(Ave.) [dBuV]	Limit(QP) [dBuV]	Margin(Ave.) [dB]	Margin(QP) [dB]																																												
0.6806	40.1	39.8	9.9	50	49.7	VA	60	73	10	23.3																																												
1.3579	26.1	25.9	9.9	36	35.8	VB	60	73	24	37.2																																												
RADIATED EMISSION																																																						
Model Name : SFLS104805				Temp. : 25																																																		
Model No. :				Humi. : 45																																																		
Serial No. :				Date : 2007/6/20 15:56																																																		
Points : 3				Test Equip. : R3132,ESPC																																																		
Detector : PEAK/QP				Comment : K.ISHIBASHI																																																		
Polarization : Vertical				Vin =48V																																																		
Power Supply : DC48V				Io=2A																																																		
Limit: [CISPR 11] Class A Group 1<3m>																																																						
							Limit(QP)		—																																													
							Horizontal(PEAK)		—																																													
							Vertical(PEAK)		—																																													
							Vertical(QP)		×																																													
							Vin =48V																																															
							Io=2A																																															
<table><tr><th>Frequency [MHz]</th><th>MeterReading (QP)[dBuV]</th><th>Ant. Type</th><th>Antenna Factor[dB/m]</th><th>Cable &amp; Preamp[dB]</th><th>Level(QP) [dBuV/m]</th><th>Angle [°]</th><th>Height[cm]</th><th>Polar.</th><th>Limit [dBuV/m]</th><th>Margin [dB]</th></tr><tr><td>158.706</td><td>56.8</td><td>BL</td><td>10</td><td>-31.5</td><td>35.3</td><td>171</td><td>159</td><td>Vert.</td><td>50</td><td>14.7</td></tr><tr><td>231.565</td><td>60.8</td><td>BL</td><td>10</td><td>-31.2</td><td>39.6</td><td>199</td><td>114</td><td>Vert.</td><td>57</td><td>17.4</td></tr><tr><td>247.897</td><td>62.8</td><td>BL</td><td>12.1</td><td>-31.1</td><td>43.8</td><td>206</td><td>108</td><td>Vert.</td><td>57</td><td>13.2</td></tr></table>											Frequency [MHz]	MeterReading (QP)[dBuV]	Ant. Type	Antenna Factor[dB/m]	Cable & Preamp[dB]	Level(QP) [dBuV/m]	Angle [°]	Height[cm]	Polar.	Limit [dBuV/m]	Margin [dB]	158.706	56.8	BL	10	-31.5	35.3	171	159	Vert.	50	14.7	231.565	60.8	BL	10	-31.2	39.6	199	114	Vert.	57	17.4	247.897	62.8	BL	12.1	-31.1	43.8	206	108	Vert.	57	13.2
Frequency [MHz]	MeterReading (QP)[dBuV]	Ant. Type	Antenna Factor[dB/m]	Cable & Preamp[dB]	Level(QP) [dBuV/m]	Angle [°]	Height[cm]	Polar.	Limit [dBuV/m]	Margin [dB]																																												
158.706	56.8	BL	10	-31.5	35.3	171	159	Vert.	50	14.7																																												
231.565	60.8	BL	10	-31.2	39.6	199	114	Vert.	57	17.4																																												
247.897	62.8	BL	12.1	-31.1	43.8	206	108	Vert.	57	13.2																																												

DATA SHEET		Date	20-Jun-07
Model	SFLS104805	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	K.ISHIBASHI

1. Line conduction

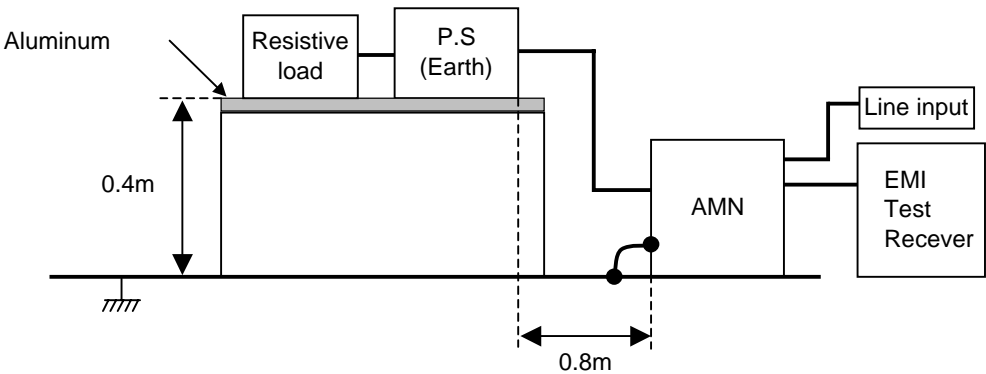

2. Radiated emission

