


DATA SHEET							Date	20-Jun-07		
Model	SFLS10483R3						Temp.	25 degreeC		
Test	EMI Line conduction & Radiated emission						Humid.	45 %RH		
							Tested by	K.ISHIBASHI		
LINE CONDUCTION										
Model Name : SFLS10483R3			Temp. : 25							
Model No. :			Humi. : 45							
Serial No. :			Date : 2007/6/20 14:06							
Points : 2			Test Equip. : R3132,ESPC							
Detector : PEAK/QP/Ave.			Comment : K.ISHIBASHI							
Line Mode : VA			Vin =48V							
Power Supply : DC48V			Io=3							
Limit1: [CISPR Pub11] Class A Gr.1(QP)										
Limit2: [CISPR Pub11] Class A Gr.1(Ave.)										
							Limit1(QP) Limit2(Ave.) VA(PEAK) VB(PEAK) VA(QP) VA(Ave.)			
							Vin =48V Io=3A			
Frequency [MHz]	Meter Reading (Ave.)[dBuV]	Meter Reading (QP)[dBuV]	Factor [dB]	Level(Ave.) [dBuV]	Level(QP) [dBuV]	Line	Limit(Ave.) [dBuV]	Limit(QP) [dBuV]	Margin(Ave.) [dB]	Margin(QP) [dB]
0.7161	38.4	38.1	9.9	48.3	48	VA	60	73	11.7	25
2.147	24.2	24	9.9	34.1	33.9	VA	60	73	25.9	39.1
RADIATED EMISSION										
Model Name : SFLS10483R3			Temp. : 25							
Model No. :			Humi. : 45							
Serial No. :			Date : 2007/6/20 13:32							
Points : 2			Test Equip. : R3132,ESPC							
Detector : PEAK/QP			Comment : K.ISHIBASHI							
Polarization : Hori. & Vert.			Vin =48V							
Power Supply : DC48V			Io=3							
Limit: [CISPR 11] Class A Group 1<3m>										
							Limit(QP) Horizontal(PEAK) Vertical(PEAK) Horizontal(QP) Vertical(QP)			
							Vin =48V Io=3A			
Frequency [MHz]	MeterReading (QP)[dBuV]	Ant. Type	Antenna Factor[dB/m]	Cable & Preamp[dB]	Level(QP) [dBuV/m]	Angle [°]	Height[cm]	Polar.	Limit [dBuV/m]	Margin [dB]
162.163	61.7	BL	9.7	-31.5	39.9	82	160	Hori.	50	10.1
233.16	63.9	BL	10.2	-31.2	42.9	299	112	Vert.	57	14.1

DATA SHEET		Date	20-Jun-07
Model	SFLS10483R3	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	K.ISHIBASHI

## 1. Line conduction

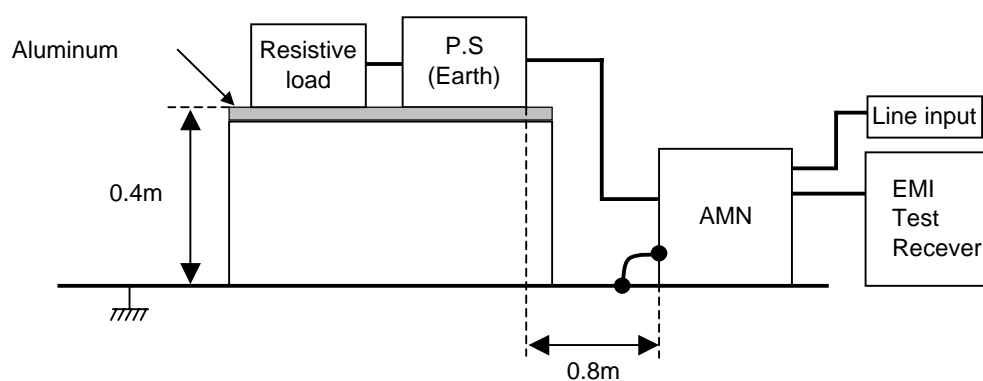

## 2. Radiated emission

