


DATA SHEET							Date	21-Sep-06		
Model	SFLS154805						Temp.	25 degreeC		
Test	EMI Line conduction & Radiated emission						Humid.	45 %RH		
							Tested by	T.Tsuri		
LINE CONDUCTION										
Model Name : SFLS154805			Temp. : 25							
Model No. :			Humi. : 45							
Serial No. :			Date : 2006/9/21 17:37							
Points : 2			Test Equip. : R3132,ESPC							
Detector : PEAK/QP/Ave.			Comment : T.Tsuri							
Line Mode : VA			Vin=48V							
Power Supply : DC 48V			Io=3A							
Limit1: [CISPR Pub11] Class A Gr.1(QP)										
Limit2: [CISPR Pub11] Class A Gr.1(Ave.)										
							Limit1(QP) Limit2(Ave.) VA(PEAK) VB(PEAK) VA(QP) VA(Ave.)			
							Vin=48V Io=3A			
Frequency [MHz]	Meter Reading (Ave.) [dBuV]	Meter Reading (QP) [dBuV]	Factor [dB]	Level(Ave.) [dBuV]	Level(QP) [dBuV]	Line	Limit(Ave.) [dBuV]	Limit(QP) [dBuV]	Margin(Ave.) [dB]	Margin(QP) [dB]
0.6836	43.8	43.3	9.9	53.7	53.2	VA	60	73	6.3	19.8
16.4146	28.4	28.1	10.2	38.6	38.3	VA	60	73	21.4	34.7
RADIATED EMISSION										
Model Name : SFLS154805			Temp. : 25							
Model No. :			Humi. : 45							
Serial No. :			Date : 2007/2/2 16:00							
Points : 2			Test Equip. : R3132,ESPC							
Detector : PEAK/QP			Comment : T.Tsuri							
Polarization : Vertical			Vin=48V							
Power Supply : DC 48V			Io=3A							
Limit: [CISPR 11] Class A Group 1<3m>										
							Limit(QP) Horizontal(PEAK) Vertical(PEAK) Vertical(QP)			
							Vin=48V Io=3A			
Frequency [MHz]	Meter Reading (QP) [dBuV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level(QP) [dBuV/m]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
186.486	57.3	BL	8.3	-31.3	34.3	325	107	Vert.	50	15.7
258.25	63.2	BL	13.5	-31.1	45.6	300	121	Vert.	57	11.4

DATA SHEET		Date	21-Sep-06
Model	SFLS154805	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	T.Tsuri

1. Line conduction

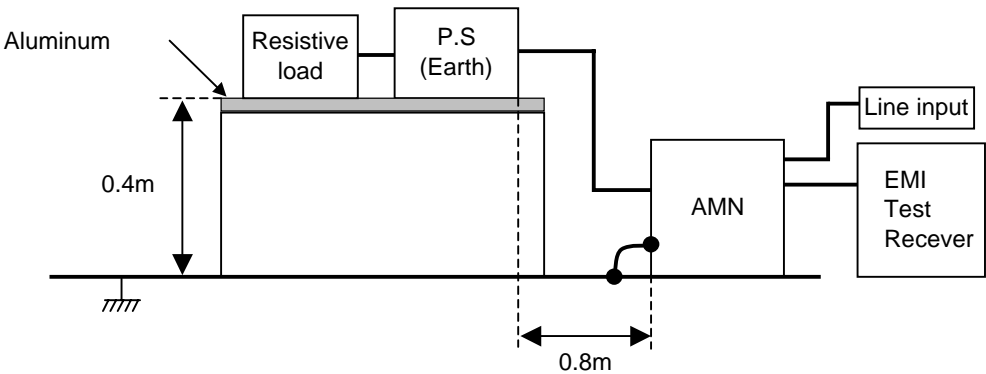

2. Radiated emission

