


DATA SHEET							Date	26-Oct-06																																			
Model	SFLS15482R5						Temp.	25 degreeC																																			
Test	EMI Line conduction & Radiated emission						Humid.	45 %RH																																			
							Tested by	T.Oiwake																																			
LINE CONDUCTION																																											
Model Name : SFLS15482R5			Temp. : 25																																								
Model No. :			Humi. : 45																																								
Serial No. :			Date : 2006/10/26 13:10																																								
Points : 2			Test Equip. : R3132,ESPC																																								
Detector : PEAK/QP/Ave.			Comment : T.Oiwake																																								
Line Mode : VA/VB			Vin=48V																																								
Power Supply : DC 48V			Io=4.5A																																								
Limit1: [CISPR Pub11] Class A Gr.1(QP)																																											
Limit2: [CISPR Pub11] Class A Gr.1(Ave.)																																											
							Limit1(QP)		Limit2(Ave.)																																		
							VA(PEAK)		VB(PEAK)																																		
							VA(QP)		VB(QP)																																		
							VA(Ave.)		VB(Ave.)																																		
							Vin=48V		Io=4.5A																																		
<table><tr><th>Frequency [MHz]</th><th>Meter Reading (Ave.) [dBuV]</th><th>Meter Reading (QP) [dBuV]</th><th>Factor [dB]</th><th>Level(Ave.) [dBuV]</th><th>Level(QP) [dBuV]</th><th>Line</th><th>Limit(Ave.) [dBuV]</th><th>Limit(QP) [dBuV]</th><th>Margin(Ave.) [dB]</th><th>Margin(QP) [dB]</th></tr><tr><td>0.6486</td><td>42.6</td><td>42.1</td><td>9.9</td><td>52.5</td><td>52</td><td>VA</td><td>60</td><td>73</td><td>7.5</td><td>21</td></tr></table>											Frequency [MHz]	Meter Reading (Ave.) [dBuV]	Meter Reading (QP) [dBuV]	Factor [dB]	Level(Ave.) [dBuV]	Level(QP) [dBuV]	Line	Limit(Ave.) [dBuV]	Limit(QP) [dBuV]	Margin(Ave.) [dB]	Margin(QP) [dB]	0.6486	42.6	42.1	9.9	52.5	52	VA	60	73	7.5	21											
Frequency [MHz]	Meter Reading (Ave.) [dBuV]	Meter Reading (QP) [dBuV]	Factor [dB]	Level(Ave.) [dBuV]	Level(QP) [dBuV]	Line	Limit(Ave.) [dBuV]	Limit(QP) [dBuV]	Margin(Ave.) [dB]	Margin(QP) [dB]																																	
0.6486	42.6	42.1	9.9	52.5	52	VA	60	73	7.5	21																																	
RADIATED EMISSION																																											
Model Name : SFLS15482R5			Temp. : 25																																								
Model No. :			Humi. : 45																																								
Serial No. :			Date : 2007/2/2 14:10																																								
Points : 2			Test Equip. : R3132,ESPC																																								
Detector : PEAK/QP			Comment : T.Oiwake																																								
Polarization : Vertical			Vin=48V																																								
Power Supply : DC 48V			Io=4.5A																																								
Limit: [CISPR 11] Class A Group 1<3m>																																											
							Limit(QP)		Horizontal(PEAK)																																		
							Vertical(PEAK)		Vertical(QP)																																		
							Vin=48V		Io=4.5A																																		
<table><tr><th>Frequency [MHz]</th><th>MeterReading (QP) [dBuV]</th><th>Ant. Type</th><th>Antenna Factor [dB/m]</th><th>Cable & Preamp [dB]</th><th>Level(QP) [dBuV/m]</th><th>Angle [°]</th><th>Height [cm]</th><th>Polar.</th><th>Limit [dBuV/m]</th><th>Margin [dB]</th></tr><tr><td>155.068</td><td>61.8</td><td>BL</td><td>10.3</td><td>-31.5</td><td>40.6</td><td>340</td><td>160</td><td>Vert.</td><td>50</td><td>9.4</td></tr><tr><td>230.934</td><td>63.5</td><td>BL</td><td>9.9</td><td>-31.2</td><td>42.2</td><td>303</td><td>101</td><td>Vert.</td><td>57</td><td>14.8</td></tr></table>											Frequency [MHz]	MeterReading (QP) [dBuV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level(QP) [dBuV/m]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]	155.068	61.8	BL	10.3	-31.5	40.6	340	160	Vert.	50	9.4	230.934	63.5	BL	9.9	-31.2	42.2	303	101	Vert.	57	14.8
Frequency [MHz]	MeterReading (QP) [dBuV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level(QP) [dBuV/m]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]																																	
155.068	61.8	BL	10.3	-31.5	40.6	340	160	Vert.	50	9.4																																	
230.934	63.5	BL	9.9	-31.2	42.2	303	101	Vert.	57	14.8																																	

DATA SHEET		Date	26-Oct-06
Model	SFLS15482R5	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	T.Oiwake

1. Line conduction

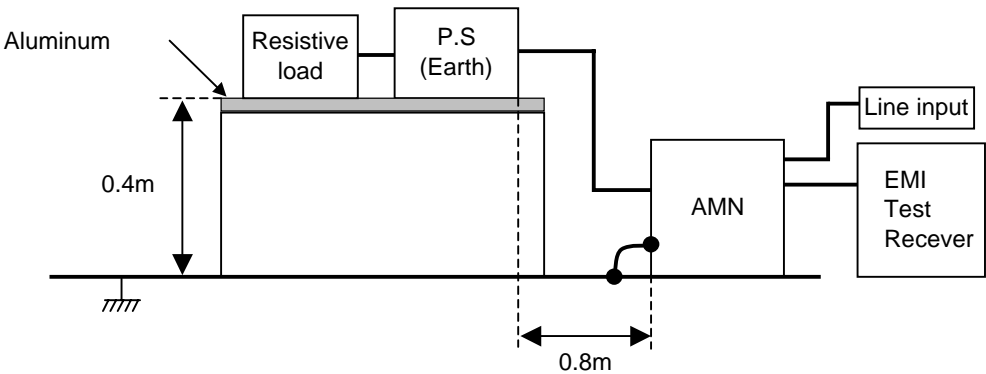

2. Radiated emission

