
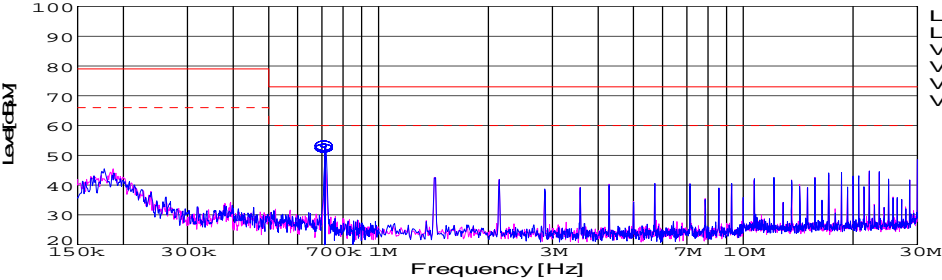
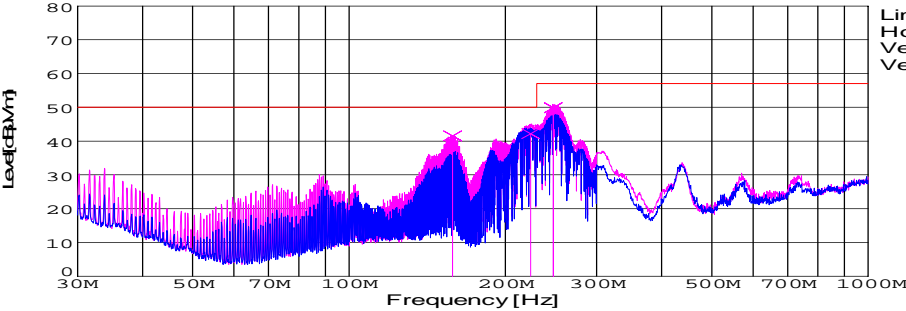


DATA SHEET							Date	05-Mar-07		
Model	SFLS15483R3						Temp.	25 degreeC		
Test	EMI Line conduction & Radiated emission						Humid.	45 %RH		
							Tested by	T.Oiwake		
LINE CONDUCTION										
Model Name : SFLS15483R3			Humi. : 45			Date : 2007/3/5 16:58				
Model No. :			Date : 2007/3/5 16:58			Test Equip. : R3132,ESPC				
Serial No. :			Test Equip. : R3132,ESPC			Load Line :				
Points : 1			Load Line :			Comment : T.Oiwake				
Detector : PEAK/QP/Ave.			Comment : T.Oiwake			Vin=48V				
Line Mode : VA			Vin=48V			Io=4.5A				
Power Supply : DC 48V			Io=4.5A							
Temp. : 25										
Limit1: [CISPR Pub11] Class A Gr.1(QP)										
Limit2: [CISPR Pub11] Class A Gr.1(Ave.)										
							Limit1(QP)		—	
							Limit2(Ave.)		- - -	
							VA(PEAK)		—	
							VB(PEAK)		—	
							VA(QP)		○	
							VA(Ave.)		●	
							Vin=48V			
							Io=4.5A			
Frequency [MHz]	Meter Reading (Ave.) [dBuV]	Meter Reading (QP) [dBuV]	Factor [dB]	Level(Ave.) [dBuV]	Level(QP) [dBuV]	Line	Limit(Ave.) [dBuV]	Limit(QP) [dBuV]	Margin(Ave.) [dB]	Margin(QP) [dB]
0.7132	43	42.4	9.9	52.9	52.3	VA	60	73	7.1	20.7
RADIATED EMISSION										
Model Name : SFLS15483R3			Temp. : 25			Humi. : 45				
Model No. :			Humi. : 45			Date : 2007/3/5 15:56				
Serial No. :			Date : 2007/3/5 15:56			Test Equip. : R3132,ESPC				
Points : 3			Test Equip. : R3132,ESPC			Comment : T.Oiwake				
Detector : PEAK/QP			Comment : T.Oiwake			Vin=48V				
Polarization : Vertical			Vin=48V			Io=4.5A				
Power Supply : DC 48V			Io=4.5A							
Limit: [CISPR 11] Class A Group 1<3m>										
							Limit(QP)		—	
							Horizontal(PEAK)		—	
							Vertical(PEAK)		—	
							Vertical(QP)		×	
							Vin=48V			
							Io=4.5A			
Frequency [MHz]	MeterReading (QP) [dBuV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level(QP) [dBuV/m]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
158.265	63	BL	10	-31.5	41.5	208	158	Vert.	50	8.5
223.664	64.2	BL	9.2	-31.2	42.2	203	115	Vert.	50	7.8
247.411	68.9	BL	12.1	-31.1	49.9	209	110	Vert.	57	7.1

DATA SHEET		Date	05-Mar-07
Model	SFLS15483R3	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	T.Oiwake

1. Line conduction

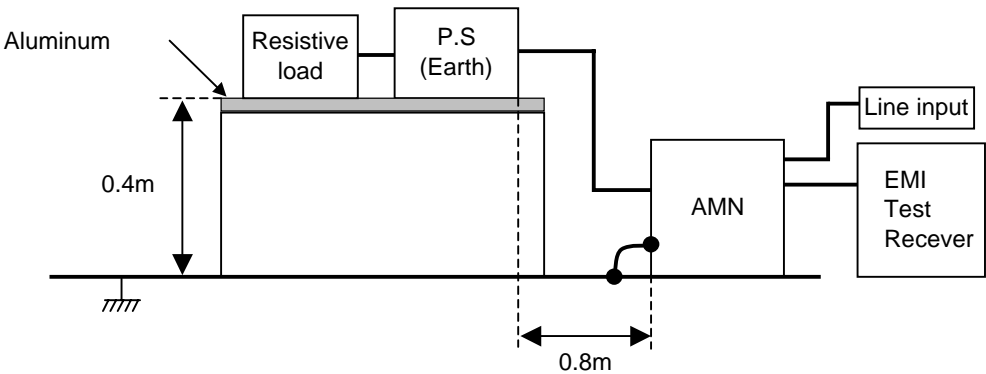

2. Radiated emission

