
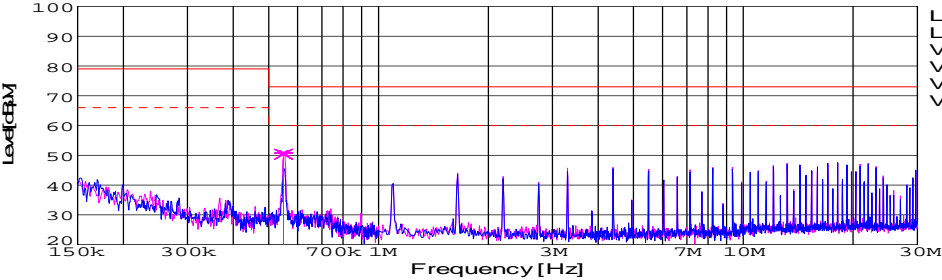
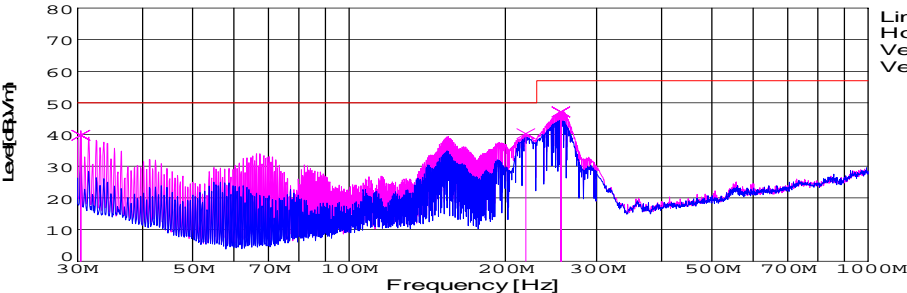


DATA SHEET							Date	25-Oct-06		
Model	SFLS304805						Temp.	25 degreeC		
Test	EMI Line conduction & Radiated emission						Humid.	45 %RH		
							Tested by	Y.Tamura		
LINE CONDUCTION										
Model Name : SFLS304805			Humi. : 45			Date : 2006/10/25 18:01				
Model No. :			Date			Test Equip. : R3132,ESPC				
Serial No. :			Load Line : 100mm			Comment : Y.Tamura				
Points : 1			Vin=48V			Io=6A				
Detector : PEAK/QP/Ave.										
Line Mode : VB										
Power Supply : DC48V										
Temp. : 25										
Limit1: [CISPR Pub11] Class A Gr.1(QP)										
Limit2: [CISPR Pub11] Class A Gr.1(Ave.)										
							Limit1(QP) ——— Limit2(Ave.) - - - VA(PEAK) ——— VB(PEAK) ——— VB(QP) × VB(Ave.) *			
							Vin=48V Io=6A			
Frequency [MHz]	Meter Reading (Ave.) [dBμV]	Meter Reading (QP) [dBμV]	Factor [dB]	Level(Ave.) [dBμV]	Level(QP) [dBμV]	Line	Limit(Ave.) [dBμV]	Limit(QP) [dBμV]	Margin(Ave.) [dB]	Margin(QP) [dB]
0.5497	40.9	40.5	9.9	50.8	50.4	VB	60	73	9.2	22.6
RADIATED EMISSION										
Model Name : SFLS304805			Humi. : 45			Date : 2007/5/14 22:10				
Model No. :			Date			Test Equip. : R3132,ESPC				
Serial No. :			Load Line : 100mm			Comment : Y.Tamura				
Points : 3			Vin=48V			Io=6A				
Detector : PEAK/QP										
Polarization : Vertical										
Power Supply : DC48V										
Temp. : 25										
Limit: [CISPR 11] Class A Group 1<3m>										
							Limit(QP) ——— Horizontal(PEAK) - - - Vertical(PEAK) ——— Vertical(QP) ×			
							Vin=48V Io=6A			
Frequency [MHz]	MeterReading (QP)[dBμV]	Ant. Type	Antenna Factor[dB/m]	Cable & Preamp[dB]	Level(QP) [dBμV/m]	Angle [°]	Height[cm]	Polar.	Limit [dBμV/m]	Margin [dB]
30.439	54.1	BL	18	-32.3	39.8	221	101	Vert.	50	10.2
219.063	62.6	BL	8.9	-31.2	40.3	136	111	Vert.	50	9.7
256.02	65.1	BL	13.2	-31.1	47.2	166	110	Vert.	57	9.8

DATA SHEET		Date	25-Oct-06
Model	SFLS304805	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	Y.Tamura

1. Line conduction

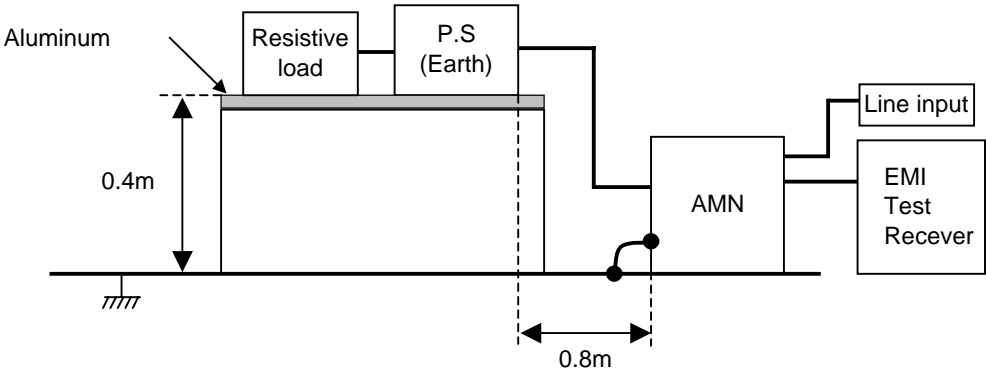

2. Radiated emission

