
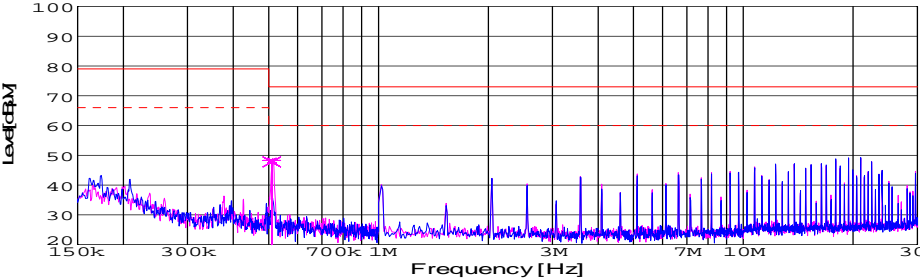
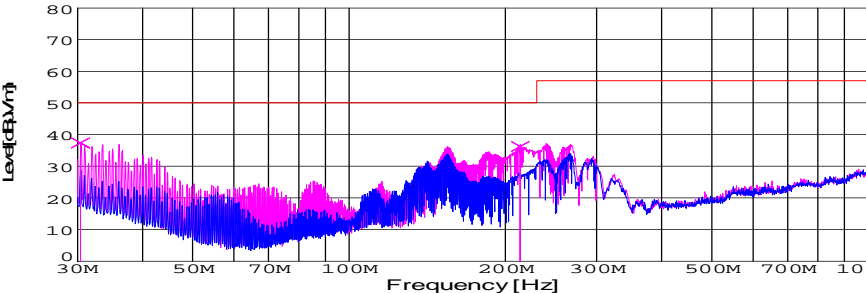


DATA SHEET							Date	19-Oct-06		
Model	SFLS30481R8						Temp.	25 degreeC		
Test	EMI						Humid.	45 %RH		
	Line conduction & Radiated emission						Tested by	Y.Tamura		
LINE CONDUCTION										
Model Name : SFLS30481R8			Humi. : 45			Date : 2006/10/19 20:40				
Model No. :			Date : 2006/10/19 20:40			Test Equip. : R3132,ESPC				
Serial No. :			Test Equip. : R3132,ESPC			Load Line : 100mm				
Points : 1			Load Line : 100mm			Comment : Y.Tamura				
Detector : PEAK/QP/Ave.			Comment : Y.Tamura			Vin=48V				
Line Mode : VB			Vin=48V			Io=11A				
Power Supply : DC48V			Io=11A							
Temp. : 25										
Limit1: [CISPR Pub11] Class A Gr.1(QP)										
Limit2: [CISPR Pub11] Class A Gr.1(Ave.)										
							Limit1(QP)			
							Limit2(Ave.)			
							VA(PEAK)			
							VB(PEAK)			
							VB(QP)			
							VB(Ave.)			
							Vin=48V			
							Io=11A			
Frequency [MHz]	Meter Reading (Ave.) [dBuV]	Meter Reading (QP) [dBuV]	Factor [dB]	Level(Ave.) [dBuV]	Level(QP) [dBuV]	Line	Limit(Ave.) [dBuV]	Limit(QP) [dBuV]	Margin(Ave.) [dB]	Margin(QP) [dB]
0.5102	38.3	37.9	9.9	48.2	47.8	VB	60	73	11.8	25.2

RADIATED EMISSION										
Model Name : SFLS30481R8			Humi. : 45			Date : 2007/5/9 13:30				
Model No. :			Date : 2007/5/9 13:30			Test Equip. : R3132,ESPC				
Serial No. :			Test Equip. : R3132,ESPC			Load Line : 100mm				
Points : 2			Load Line : 100mm			Comment : Y.Tamura				
Detector : PEAK/QP			Comment : Y.Tamura			Vin=48V				
Polarization : Vertical			Vin=48V			Io=11A				
Power Supply : DC48V			Io=11A							
Temp. : 25										
Limit: [CISPR 11] Class A Group 1<3m>										
							Limit(QP)			
							Horizontal(PEAK)			
							Vertical(PEAK)			
							Vertical(QP)			
							Vin=48V			
							Io=11A			
Frequency [MHz]	MeterReading (QP) [dBuV]	Ant. Type	Antenna Factor [dB/m]	Cable & Preamp [dB]	Level(QP) [dBuV/m]	Angle [°]	Height [cm]	Polar.	Limit [dBuV/m]	Margin [dB]
30.387	51.7	BL	18	-32.3	37.4	235	105	Vert.	50	12.6
213.651	58.7	BL	8.8	-31.3	36.2	192	114	Vert.	50	13.8

DATA SHEET		Date	19-Oct-06
Model	SFLS30481R8	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	Y.Tamura

1. Line conduction

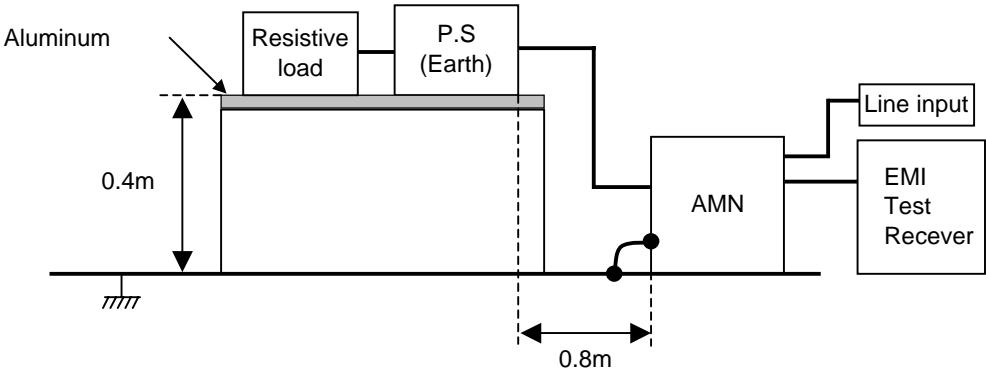

2. Radiated emission

