



DATA SHEET

Date	19-Apr-12
Temp.	25 degreeC
Humid.	40 %RH
Tested by	T.ARAI

Model	SNDHS200A12
Test	EMI Line conduction & Radiated emission

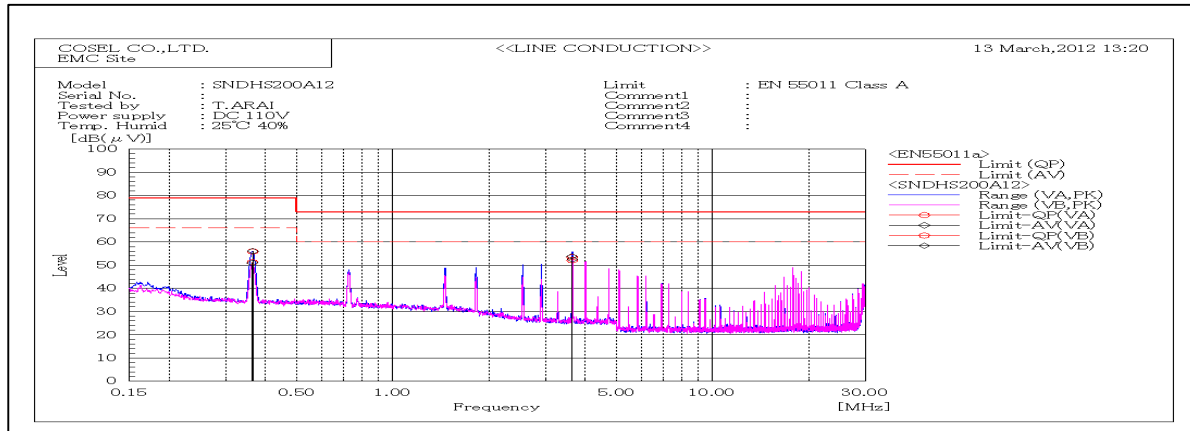


Frequency MHz	Ham	Line Phase	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
			QP	AV		QP	AV	QP	AV	QP	AV		
0.36411		VB	41.2	41	10	51.2	51	79	66	27.8	15	Pass	
0.36505		VA	45.9	46	10	55.9	56	79	66	23.1	10	Pass	
3.64065		VA	43.2	43.6	10.2	53.4	53.8	73	60	19.6	6.2	Pass	
3.64159		VB	41.9	42.3	10.2	52.1	52.5	73	60	20.9	7.5	Pass	

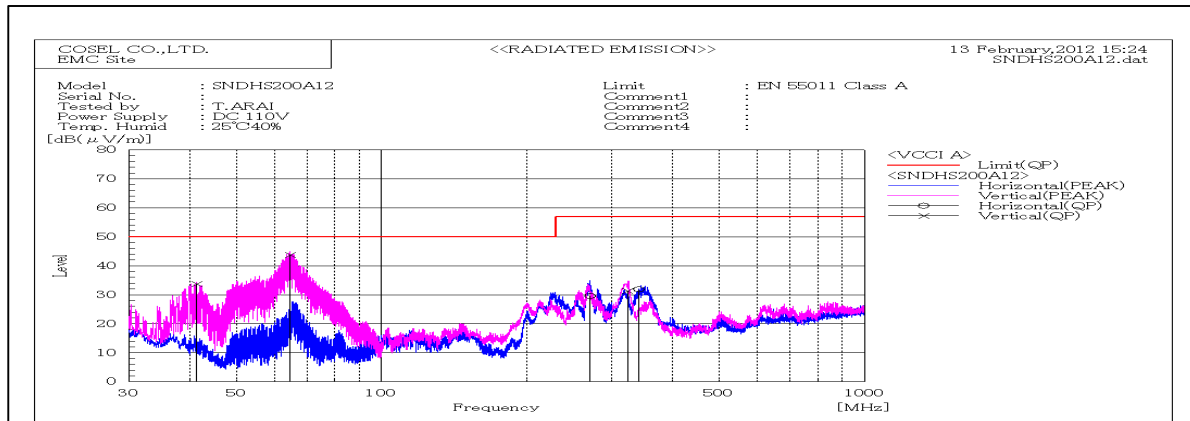


Frequency MHz	Ham	Polariz ation	Level Check	Stabili ty	Reading dB(μV)			Space Loss dB	Level dB(mW)			Limit dB(mW)	Limit dB(mW)	Limit dB(mW)	Margin dB			Pass/ Fail	Height cm	Angle deg	Remark
					QP	AV	PK		QP	AV	PK				QP	AV	PK				
41.376	V			Stable	49.7			-16	33.7			50			16.3			Pass	101	245	
64.61	V			Stable	66.2			-22.5	43.7			50			6.3			Pass	103	13	
270.339	H			Stable	47.7			-18.1	29.6			57			27.4			Pass	119	268	
323.835	V			Stable	48.4			-17	31.4			57			25.6			Pass	141	131	
341.174	H			Stable	45.8			-13.9	31.9			57			25.1			Pass	110	34	

DATA SHEET		Date	19-Apr-12
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.ARAI

1. Line conduction

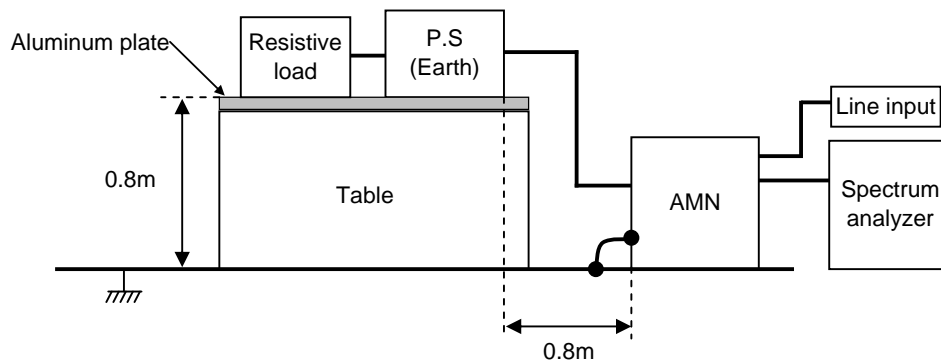

2. Radiated emission

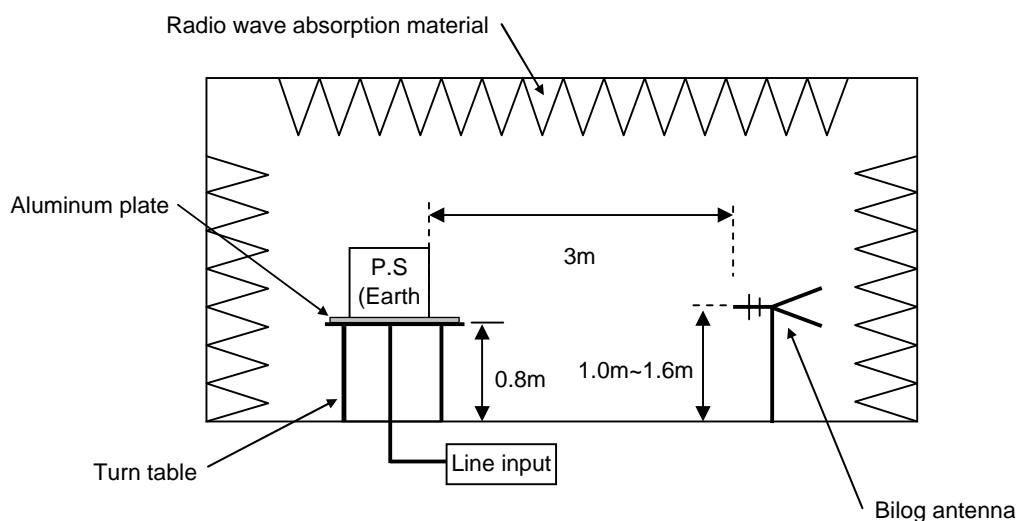

Test: EMI

Model Name: SNDHS200A Series

○ Photographs of Test Set-Up

LINE CONDUCTION



RADIATED EMISSION

