



DATA SHEET		Date	18-Apr-12
Model	SNDHS50A05	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.ARAI

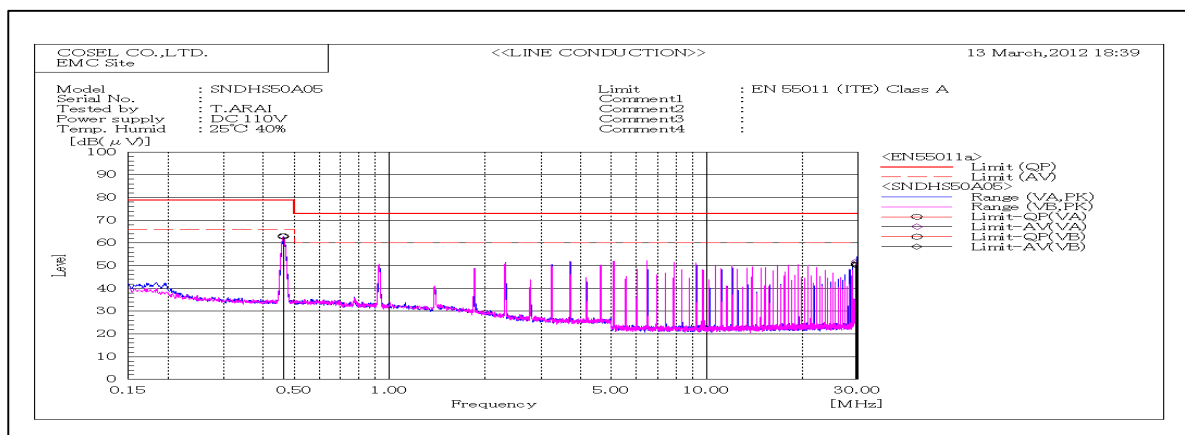


Frequency MHz	Ham	Line Phase	Reading dB(uV)		Factor dB	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/ Fail	Remark
			QP	AV		QP	AV	QP	AV	QP	AV		
0.46217		VB	52.8	52.8	10.1	62.9	62.9	79	66	16.1	3.1	Pass	
0.4619		VA	52.9	52.9	10.1	63	63	79	66	16	3	Pass	
29.58035		VB	39.4	39.4	11	50.4	50.4	73	60	22.6	9.6	Pass	
29.70645		VA	40	41	11	51	52	73	60	22	8	Pass	

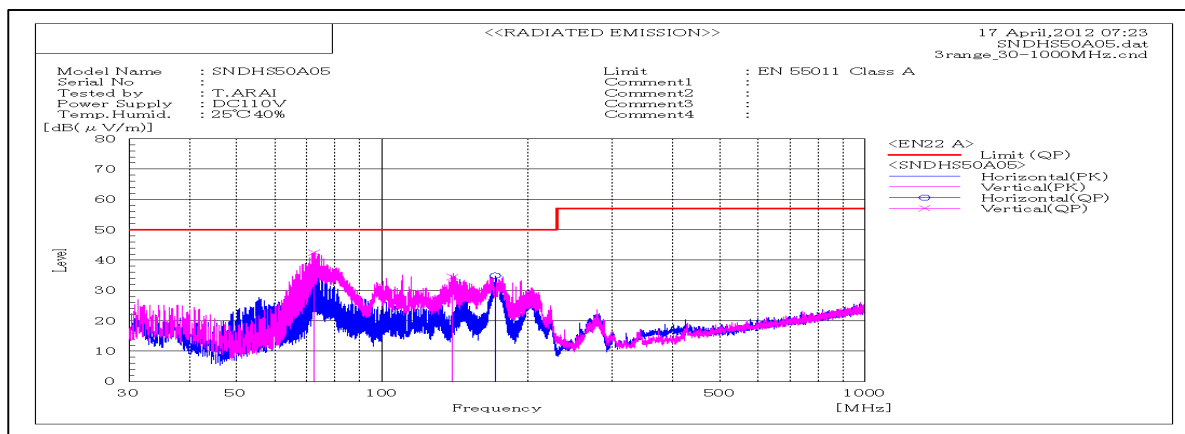


Frequency MHz	Ham	Polariz ation	Level Check	Stabili ty	Reading dB(uV)			Factor dB(1/m)	Level dB(uV/m)			Limit dB(uV/m)	Limit dB(uV/m)	Limit dB(uV/m)	Margin dB			Pass/ Fail	Height cm	Angle deg	Remark
					QP	AV	PK		QP	AV	PK				QP	AV	PK				
72.448		V		Stable	59.1			-16.6	42.5			50			7.5			Pass	113	345	
139.835		V		Stable	47.5			-13	34.5			50			15.5			Pass	106	185	
171.775		H		Stable	46.8			-11.9	34.9			50			15.1			Pass	153	175	

DATA SHEET		Date	18-Apr-12
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.ARAI

1. Line conduction

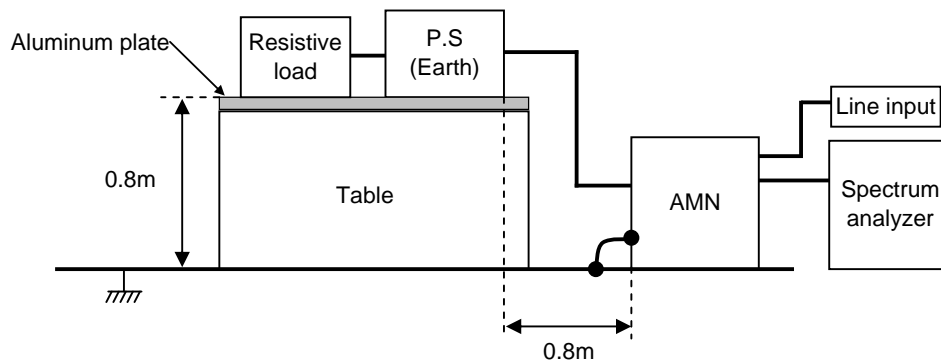

2. Radiated emission

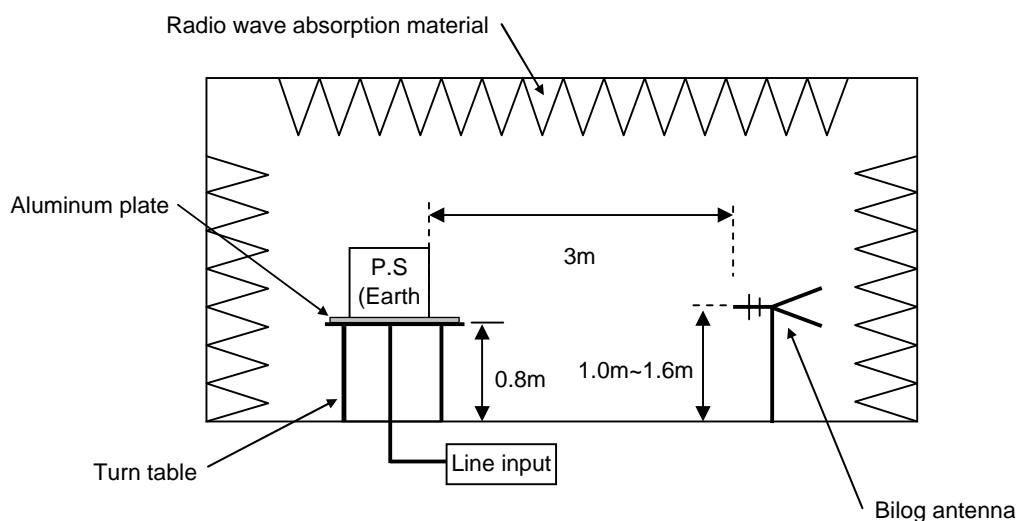

Test: EMI

Model Name: SNDHS50A/100A Series

○ Photographs of Test Set-Up

LINE CONDUCTION



RADIATED EMISSION

