



DATA SHEET			Date	25-May-11
Model	SPLFA75F-12		Temp.	25 degreeC
Test	EMI		Humid.	40 %RH
	Line conduction & Radiated emission		Tested by	H.Kitamura

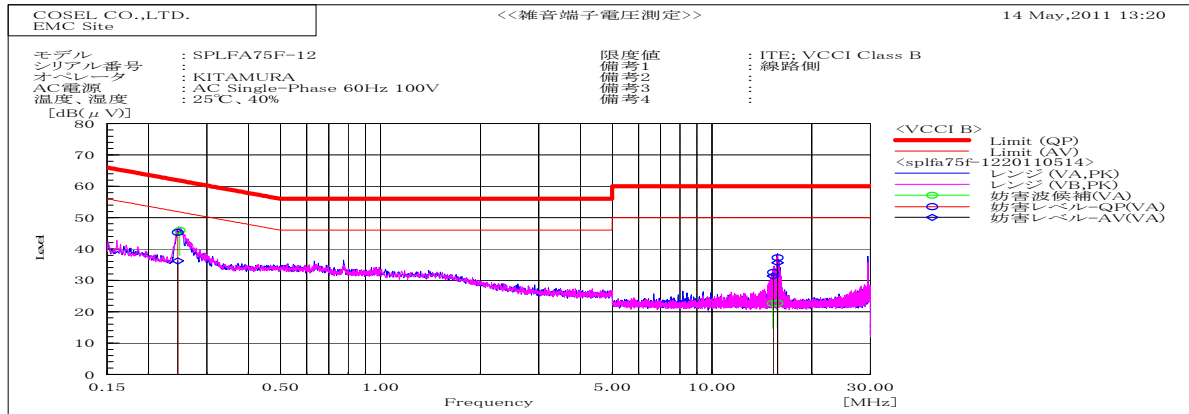


Frequency MHz	Line Phas	Reading dB(μV)		Factor dB	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/ Fail	Remark
		QP	AV		QP	AV	QP	AV	QP	AV		
0.24495	VA	35.2	26.1	10.1	45.3	36.2	61.9	51.9	16.6	15.7	Pass	
15.25495	VA	21.8	20.7	10.7	32.5	31.4	60	50	27.5	18.6	Pass	
15.7637	VA	26.5	24.9	10.8	37.3	35.7	60	50	22.7	14.3	Pass	

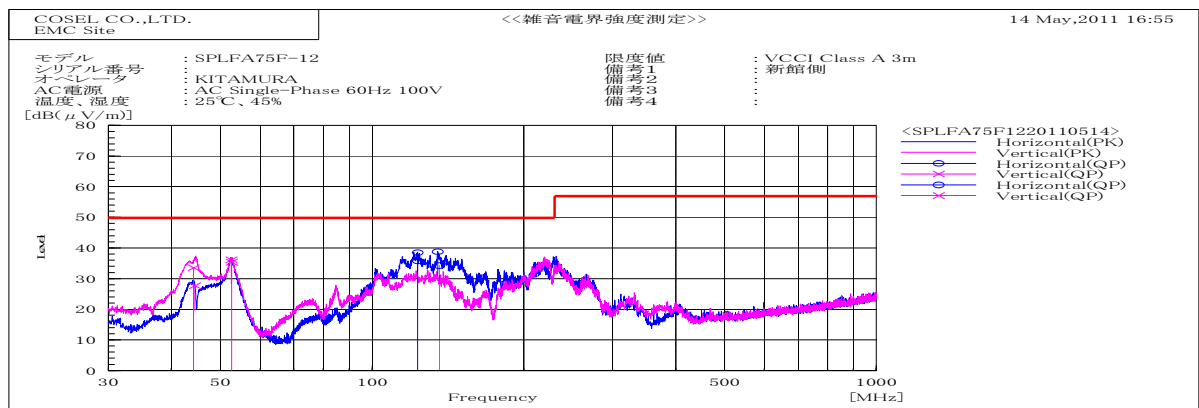

Frequency MHz	Polarization	Reading dB(μV)	Space Loss dB	Level dB(mW)	Limit dB(mW)	Margin dB	Pass/ Fail	Height cm	Angle deg	Remark
		QP		QP	QP	QP				
44.525	V	48.7	-21	27.7	50	22.3	Pass	101	229	
52.575	V	61.1	-24.9	36.2	50	13.8	Pass	101	268	
123.2	H	58.1	-19.6	38.5	50	11.5	Pass	160	350	
134.9	H	58.8	-20	38.8	50	11.2	Pass	160	348	

DATA SHEET		Date	25-May-11
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	H.Kitamura

1. Line conduction

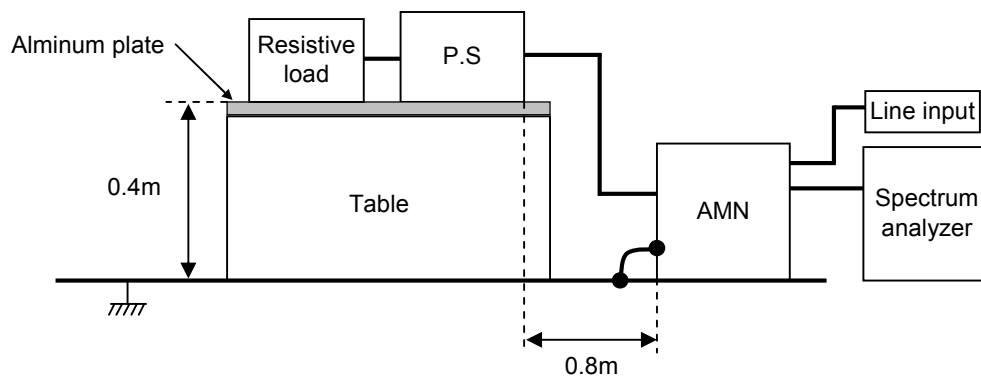

2. Radiated emission

