



DATA SHEET

		Date	18-Feb-13
Model	STMGFS152415	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Miyake

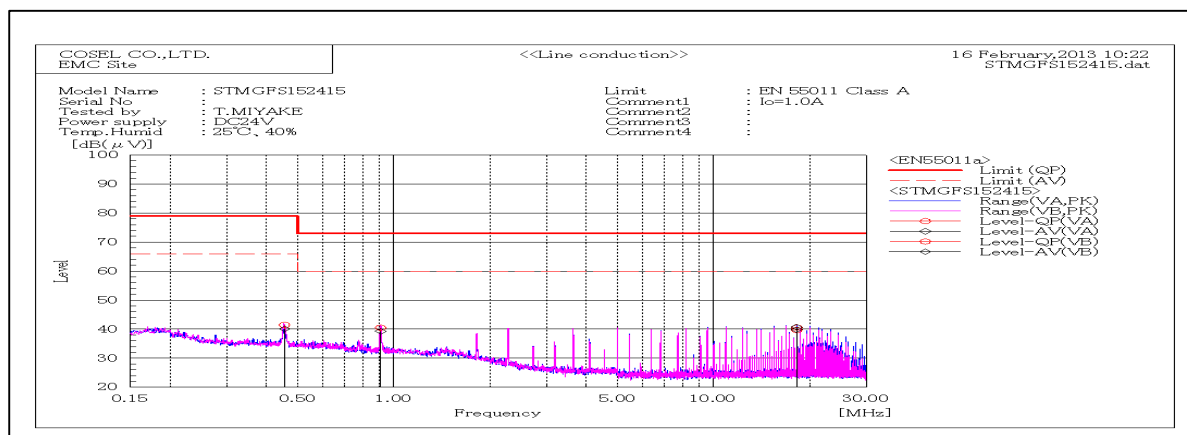


Frequency MHz	Harm	Line Phase	Reading dB(uV)		Factor dB	Level dB(uV)		Limit dB(uV)		Margin dB		Pass/ Fail	Remark
			QP	AV		QP	AV	QP	AV	QP	AV		
0.45518		VB	21.4	20	20.1	41.5	40.1	79	66	37.5	25.9	Pass	
0.91002		VA	20.4	19.2	20.1	40.5	39.3	73	60	32.5	20.7	Pass	
18.2108		VA	19.3	19.5	21.2	40.5	40.7	73	60	32.5	19.3	Pass	
18.21205		VB	18.6	18.7	21.1	39.7	39.8	73	60	33.3	20.2	Pass	

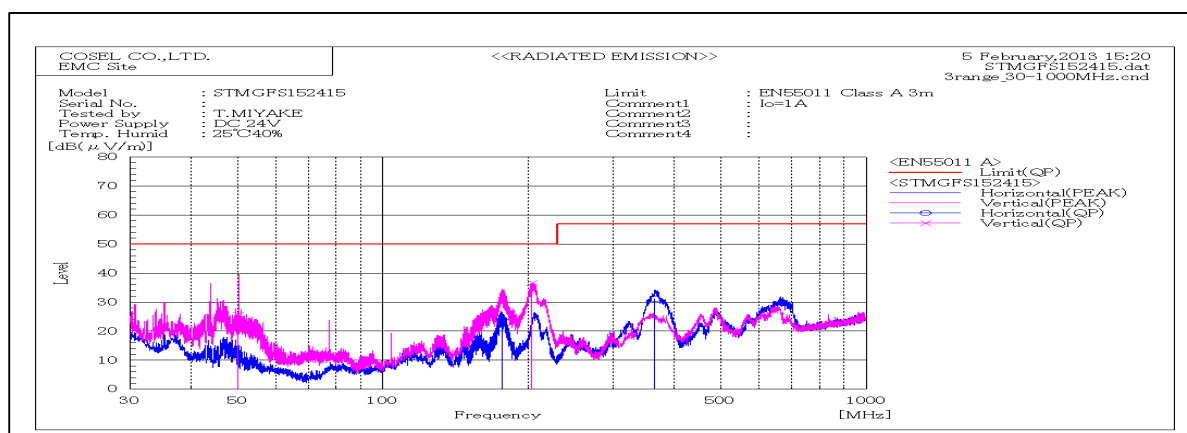

Frequency MHz	Polarization	Stability	Reading dB(uV)		Space Loss dB	Level dB(mW)		Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	AV		QP	AV					
50.164	V	Stable	49.5	-23.9	25.6	50	24.4	Pass	101	90		
176.386	H	Stable	46.2	-22.2	24	50	26	Pass	145	258		
203.639	V	Stable	52.5	-15.8	36.7	50	13.3	Pass	101	280		
365.849	H	Stable	43.7	-12.5	31.2	57	25.8	Pass	121	97		

DATA SHEET		Date	18-Feb-13
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	40 %RH
		Tested by	T.Miyake

1. Line conduction

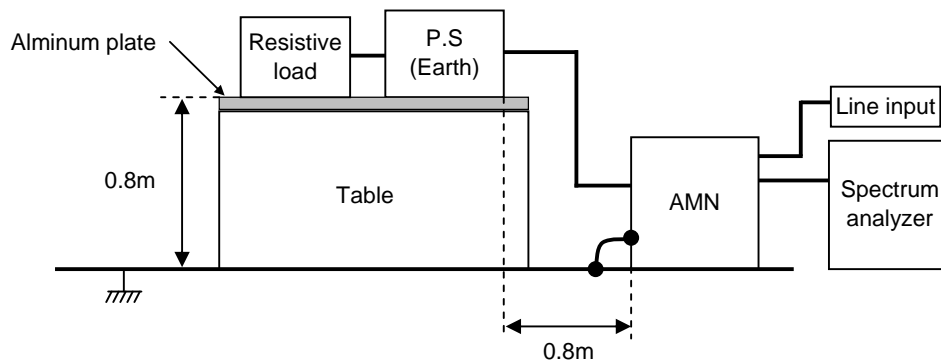

2. Radiated emission

