

TEST DATA OF TAC-150-□□□-U

Noise Filter

May. 20. 2016

Approved by : Tadayuki Noda
Tadayuki Noda Design Manager

Prepared by : Shiro Gotani
Shiro Gotani Design Engineer



COSEL CO.,LTD.

CONTENTS

1. Attenuation Characteristics	1
2. Leakage Current	3
3. Figure of Testing Circuitry	4
(Final Page 4)	




Model	TAC-150-□□□-U	Temperature	25°C
Item	Attenuation Characteristics	Testing Circuitry	Figure A
Object	_____		

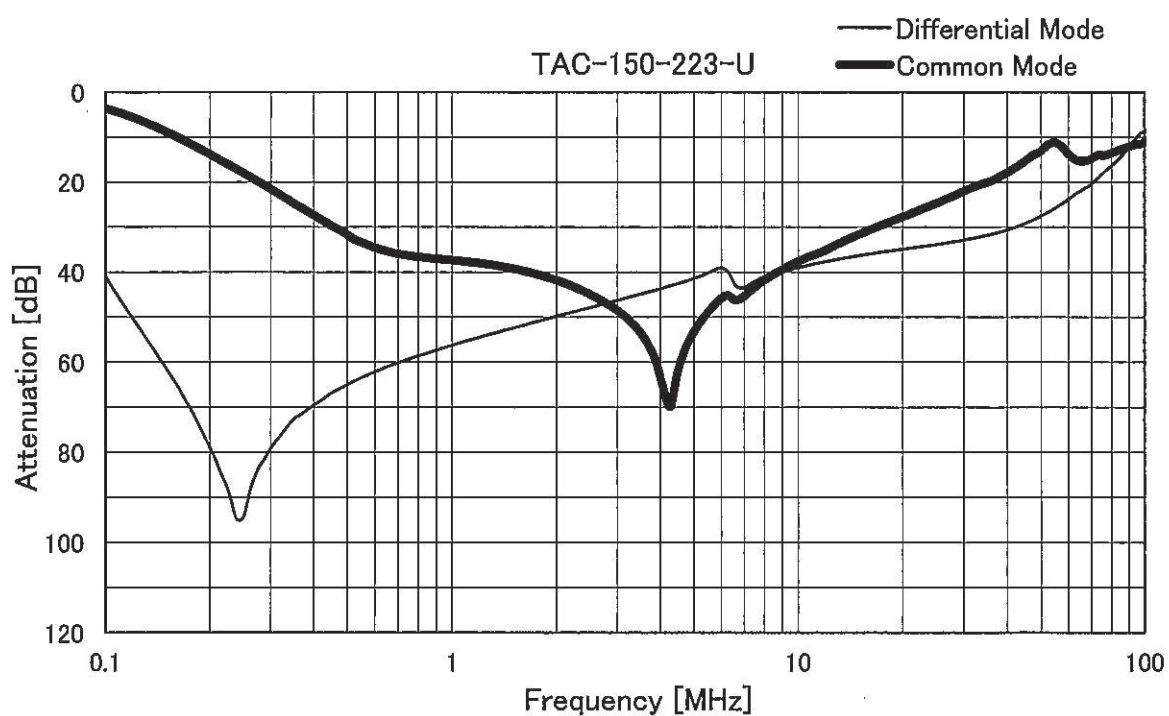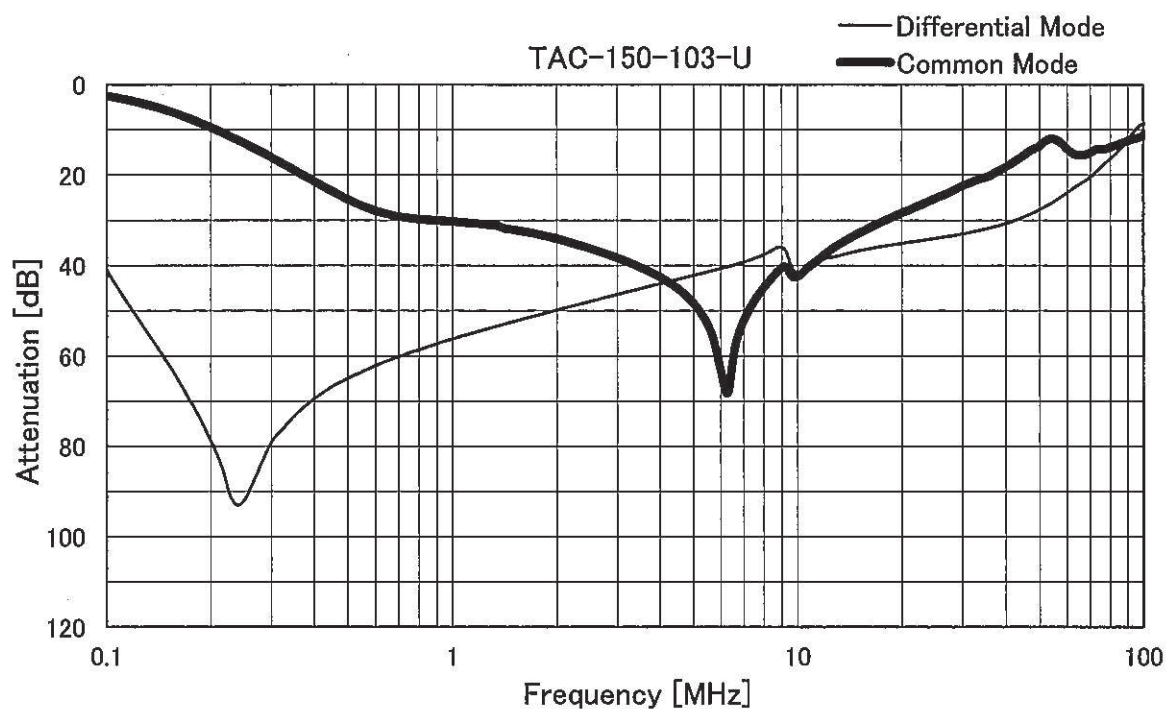



Model	TAC-150-□□□-U
Item	Attenuation Characteristics
Object	_____

Temperature 25°C
Testing Circuitry Figure A

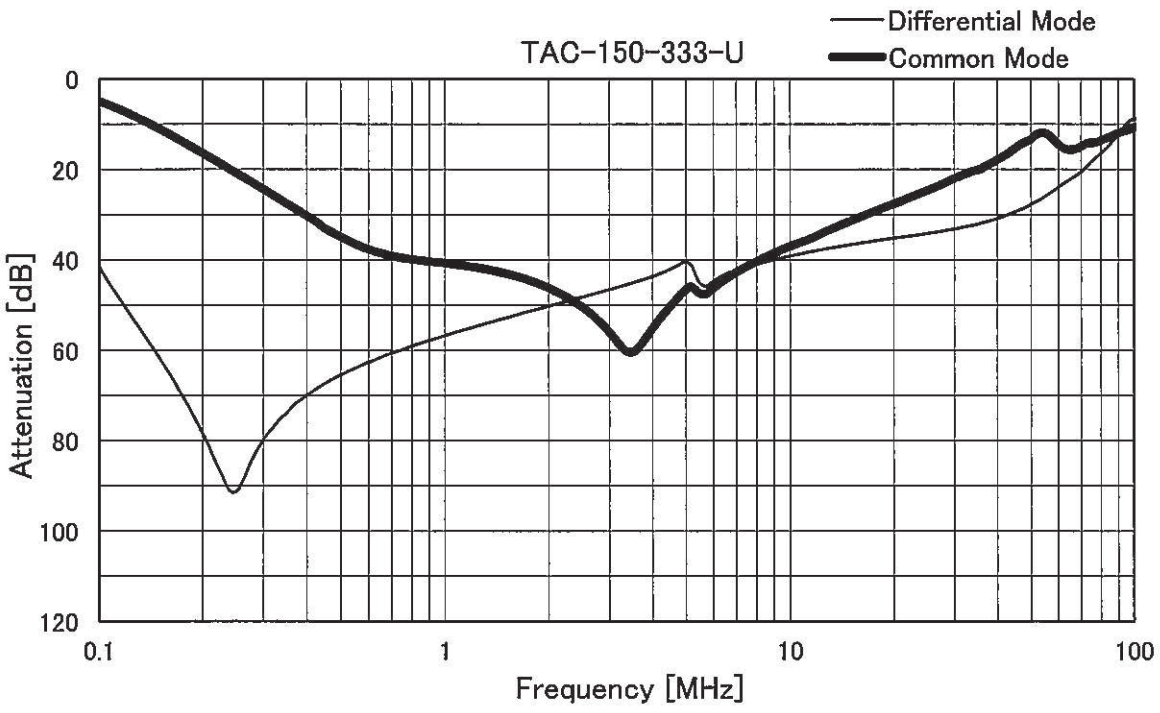

Model		TAC-150-□□□-U	Temperature 25°C Testing Circuitry Figure B
Item		Leakage Current	
Object		_____	

1.Results

[mA]

Model	Standards	Input Volt.					Note
		200 [V]	250 [V]	400 [V]	480 [V]	500 [V]	
TAC-150-103-U	UL1283	0.62	0.78				
TAC-150-223-U	UL1283	1.4	1.8				
TAC-150-333-U	UL1283	2.1	2.7				

2.Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

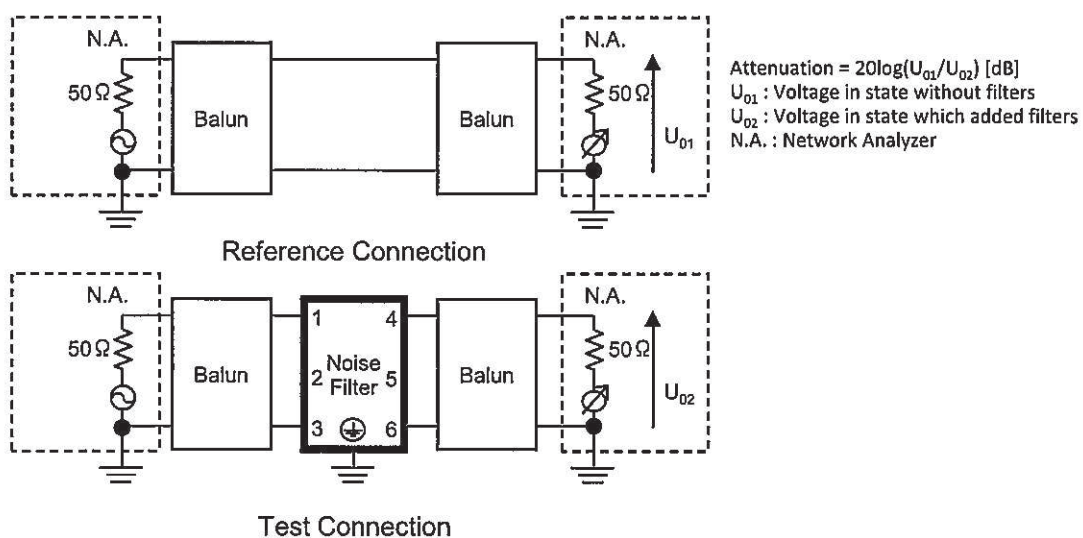


Figure A - 1 Differential mode attenuation measurement

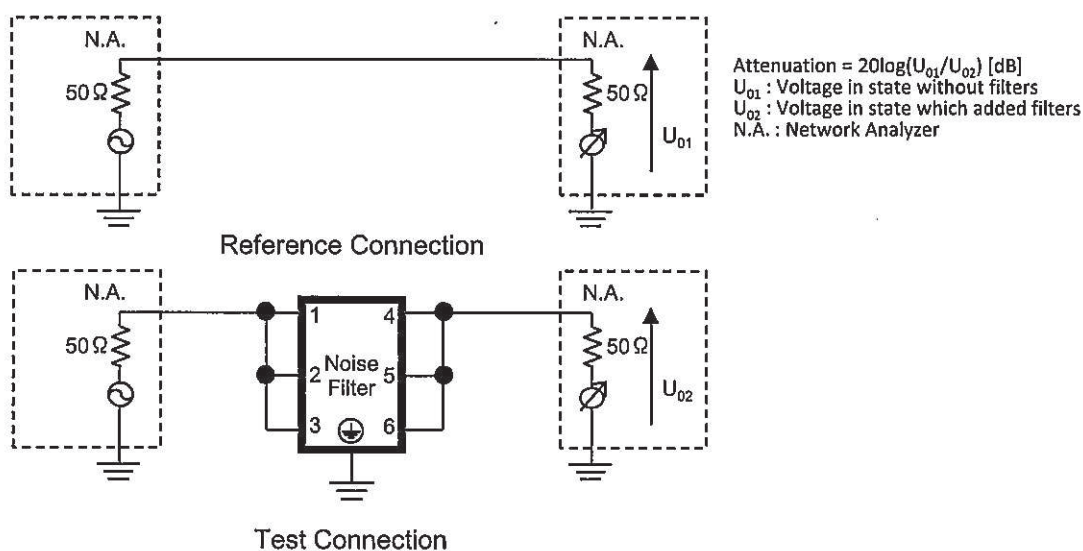


Figure A - 2 Common mode attenuation measurement

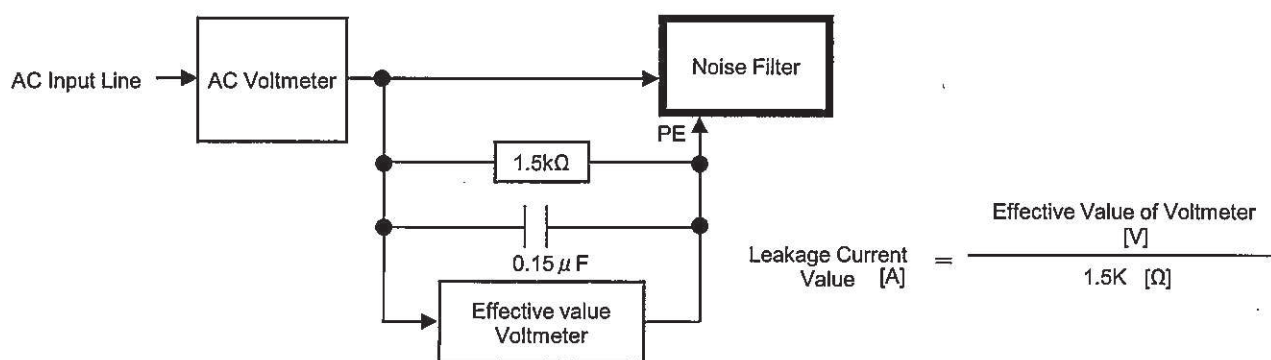


Figure B Leakage current measurement (UL1283)