

# TEST DATA OF TAH-10-□□□

Noise Filter

Sep. 11 , 2017

Approved by : Tadayuki Noda  
Tadayuki Noda Design Manager

Prepared by : Issei Okuno  
Issei Okuno Design Engineer

**COSEL CO.,LTD.**





## CONTENTS

1.Attenuation Characteristics .....	1
2.Leakage Current .....	3
3.Figure of Testing Circuitry .....	4
(Final Page 4)	


**COSEL**

Model	TAH-10-□□□	Temperature	25°C
Item	Attenuation Characteristics	Testing Circuitry	Figure A
Object	_____		

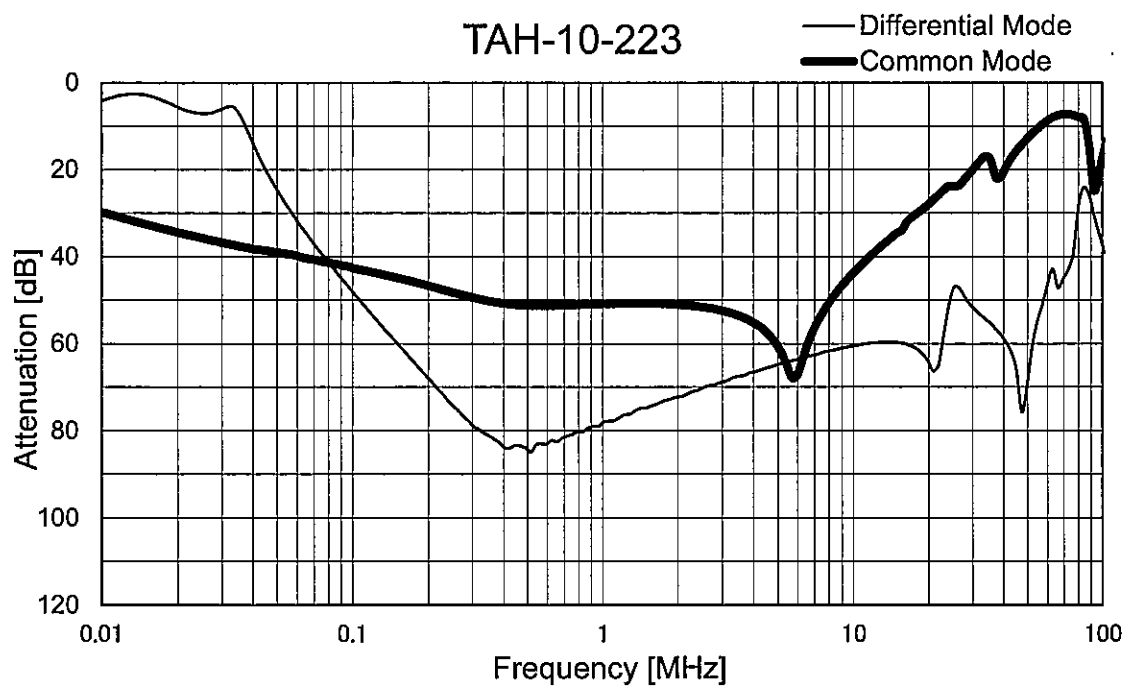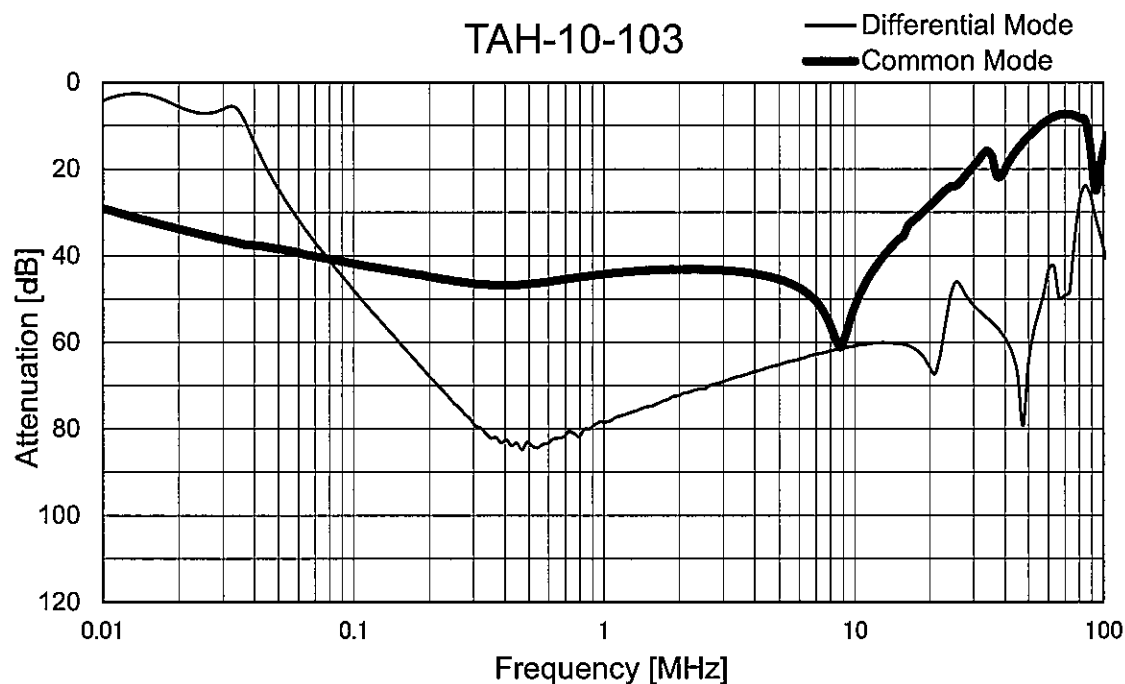

**COSEL**

Model	TAH-10-□□□	Temperature	25°C
Item	Attenuation Characteristics	Testing Circuitry	Figure A
Object	_____		

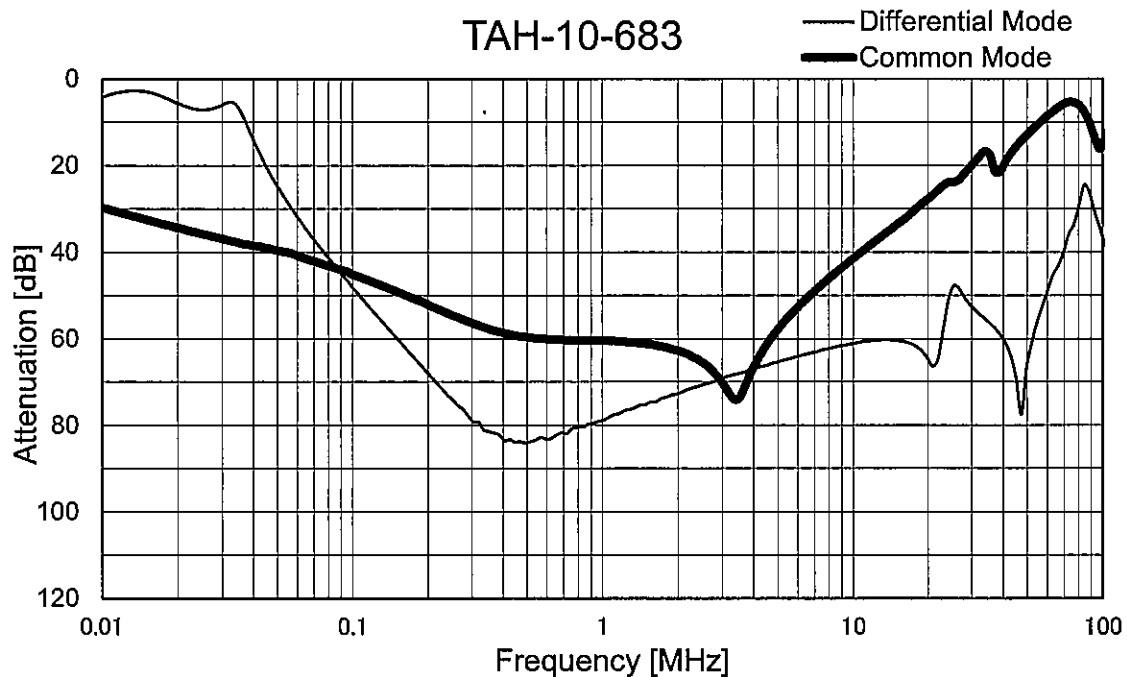



		Temperature 25°C Testing Circuitry Figure B
Model	TAH-10-□□□	
Item	Leakage Current	
Object	_____	

## 1.Results

[mA]

Model	Standards	Input Volt.				Note
		200[V]	250[V]	400[V]	500[V]	
TAH-10-103	UL1283	0.23	0.28	0.45	0.57	
TAH-10-223	UL1283	0.52	0.65	1.0	1.3	
TAH-10-683	UL1283	1.4	1.8	2.8	3.6	

## 2.Condition

Leakage current value is concluded after measuring both phases of AC input and by choosing the larger one.

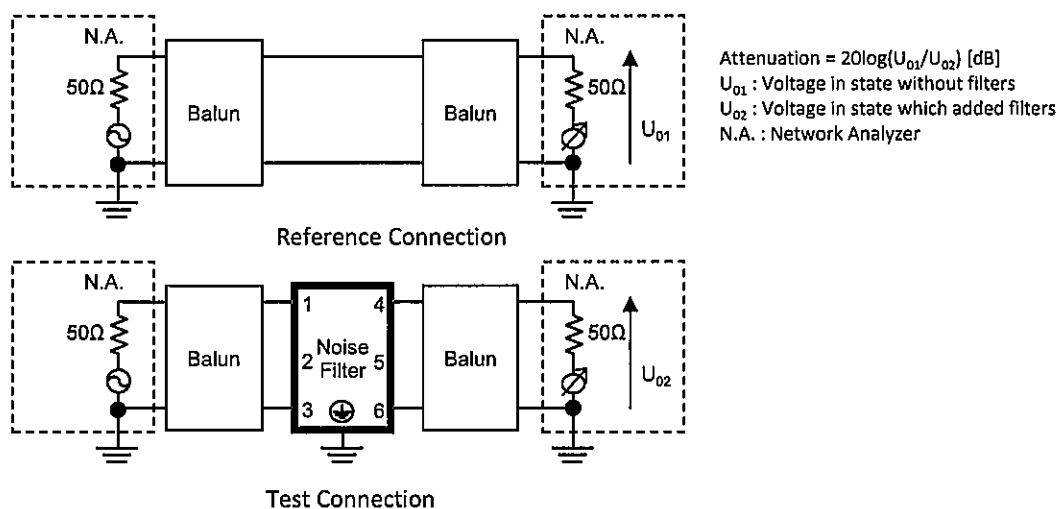


Figure A - 1 Differential mode attenuation measurement

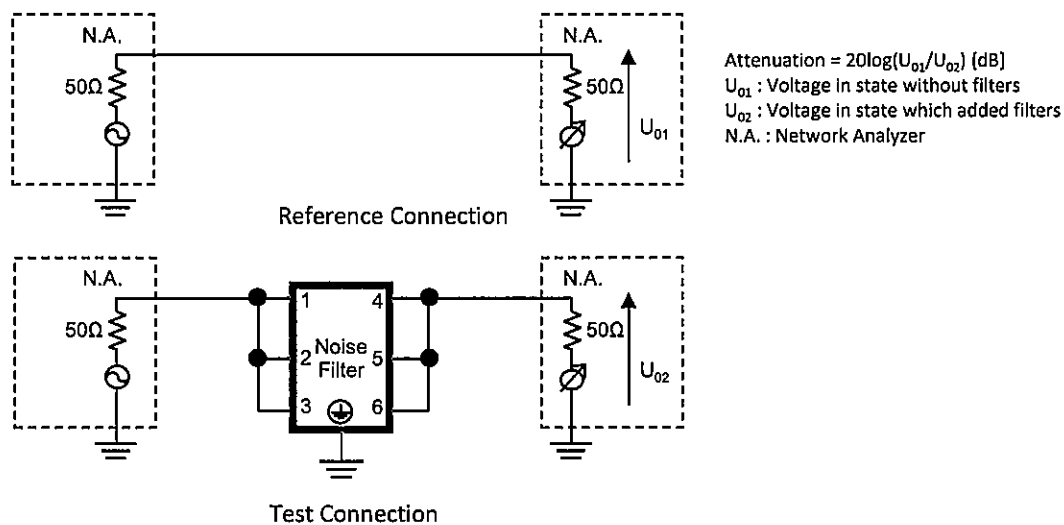


Figure A - 2 Common mode attenuation measurement

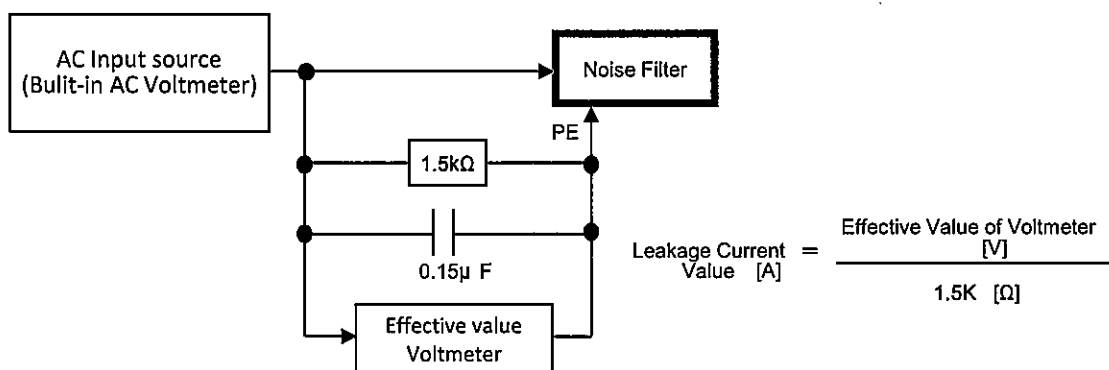


Figure B Leakage current measurement ( UL1283)