



DATA SHEET		Date	26-Jun-25
Model	UMA120F-15-Y	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	Y.Sakai

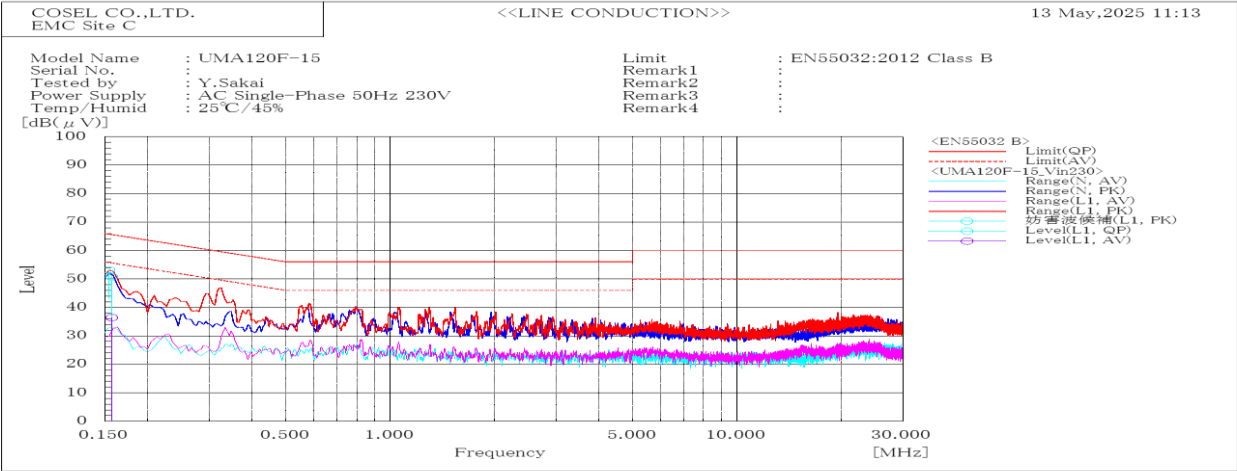


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.157	L1	50.8	36.4	65.6	55.6	14.8	19.2	Pass	

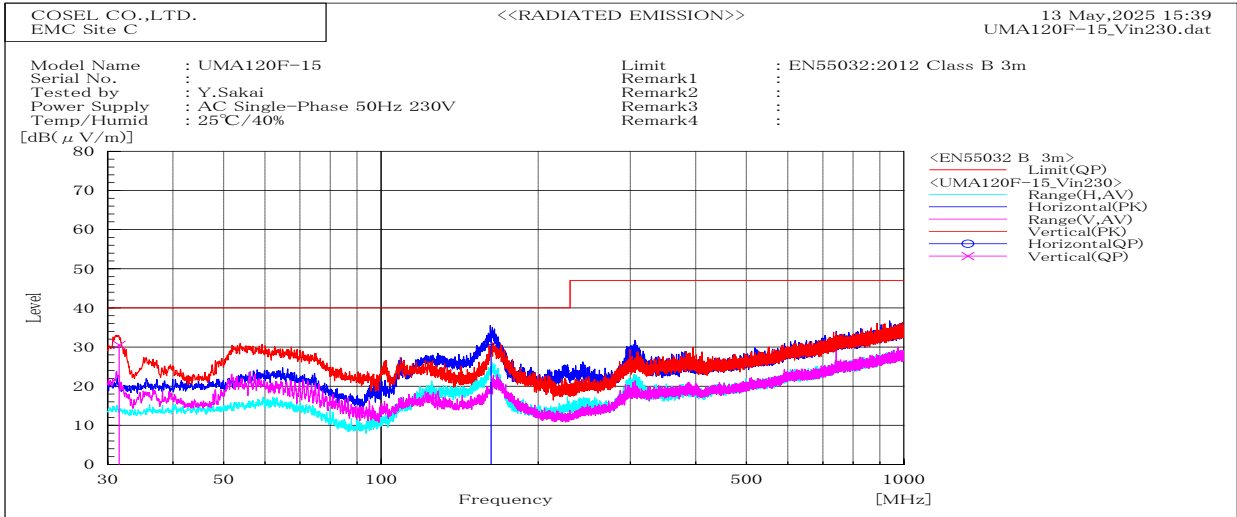


Frequency MHz	Polarization	Stability	Level dB(μV/m)	Limit dB(μV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
162.415	H	Stable	31.6	40	8.4	Pass	186.1	0	
31.555	V	Stable	30.5	40	9.5	Pass	100	261	

DATA SHEET		Date	26-Jun-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	Y.Sakai

1. Line conduction

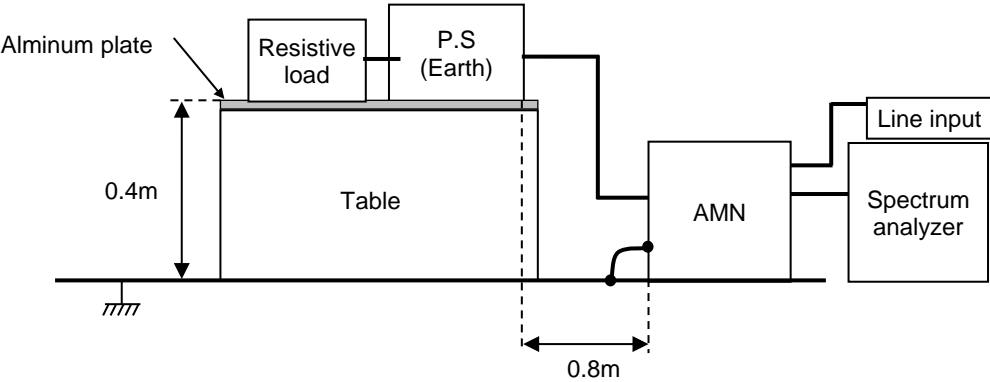

2. Radiated emission

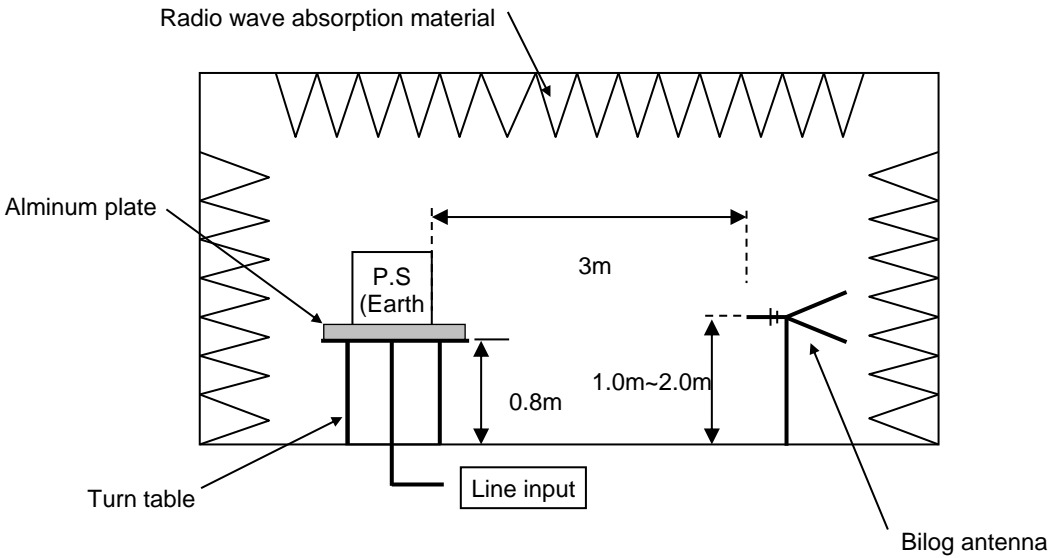


Conditions

Test : EMI
Model Name : UMA120F-15-Y

○Photographs of Test Set-Up

1. LINE CONDUCTION

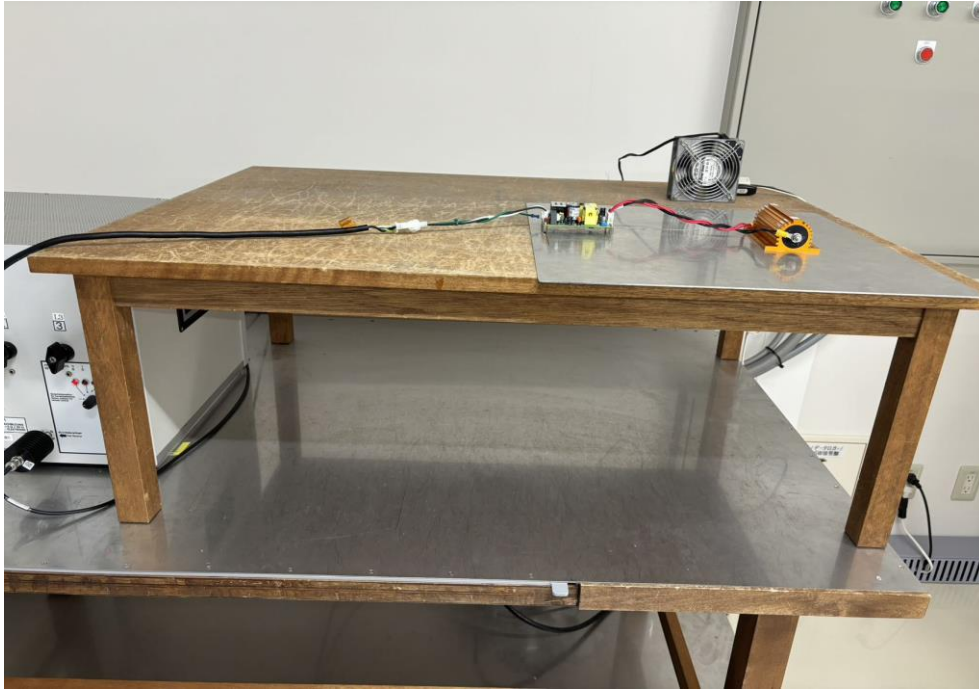

2. RADIATED EMISSION

