



DATA SHEET			Date	26-Jun-25
Model	UMA120F-18-Y		Temp.	25 degreeC
Test	EMI		Humid.	45 %RH
	Line conduction & Radiated emission		Tested by	Y.Sakai

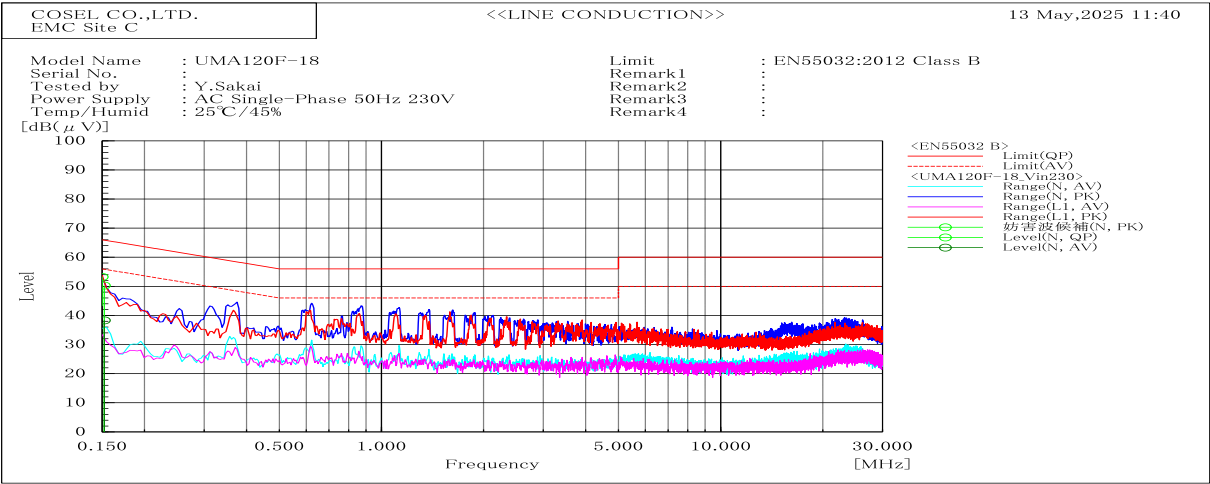


Frequency MHz	Line	Level dB(μV)		Limit dB(μV)		Margin dB		Pass/Fail	Remark
		QP	AV	QP	AV	QP	AV		
0.152	N	50.3	38.3	65.9	55.9	15.6	17.6	Pass	

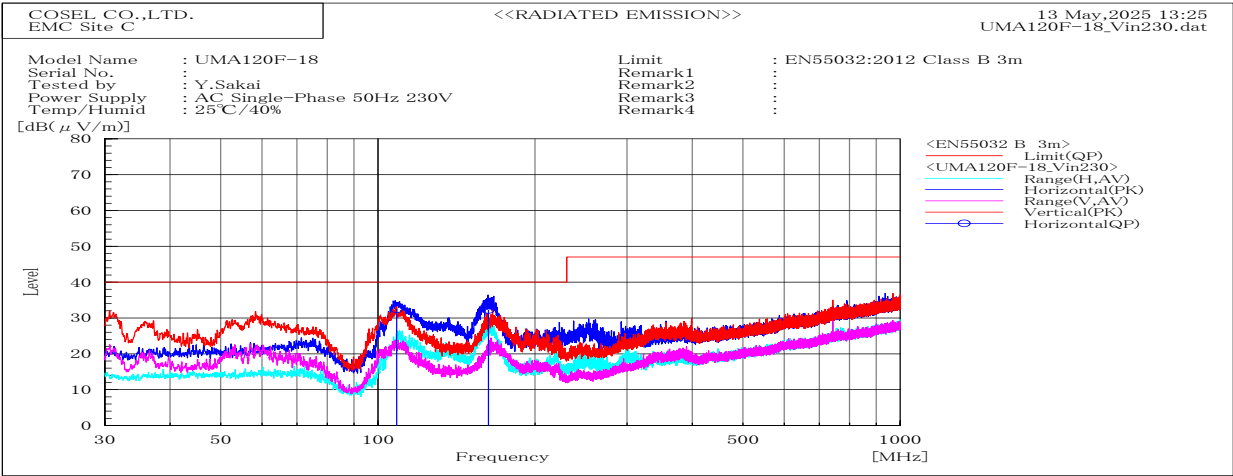


Frequency MHz	Polarization	Stability	Level dB(uV/m)	Limit dB(uV/m)	Margin dB	Pass/Fail	Height cm	Angle deg	Remark
			QP	QP	QP				
162.838	H	Stable	32.2	40	7.8	Pass	189.6	6.6	
108.594	H	Stable	32.4	40	7.6	Pass	180.2	0	

DATA SHEET		Date	26-Jun-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	Y.Sakai

1. Line conduction

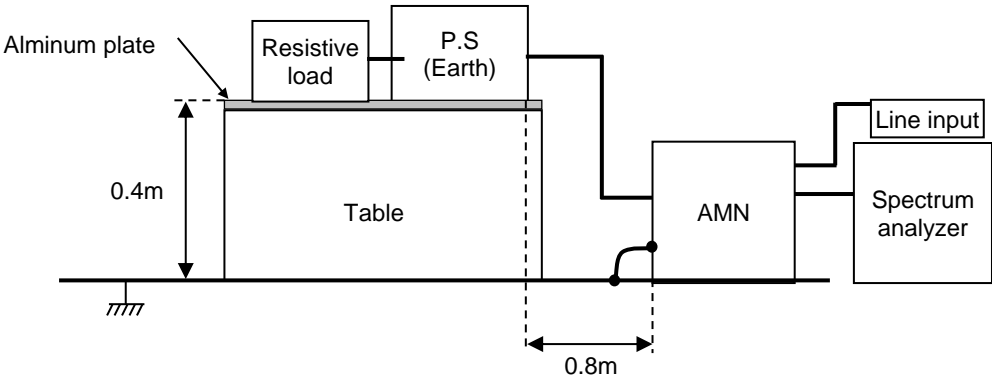

2. Radiated emission

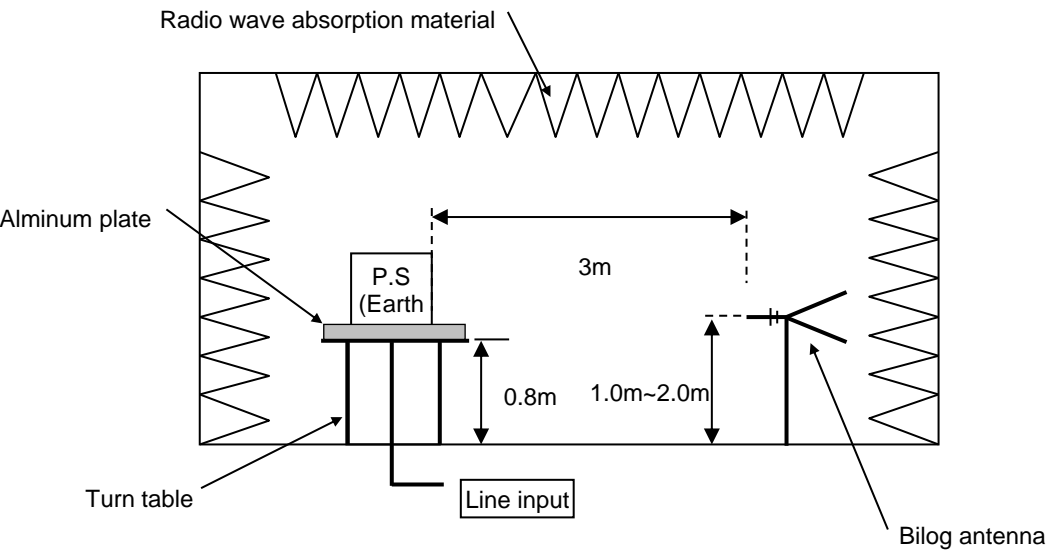


## Conditions

Test : EMI  
Model Name : UMA120F-18-Y

## ○Photographs of Test Set-Up

### 1. LINE CONDUCTION

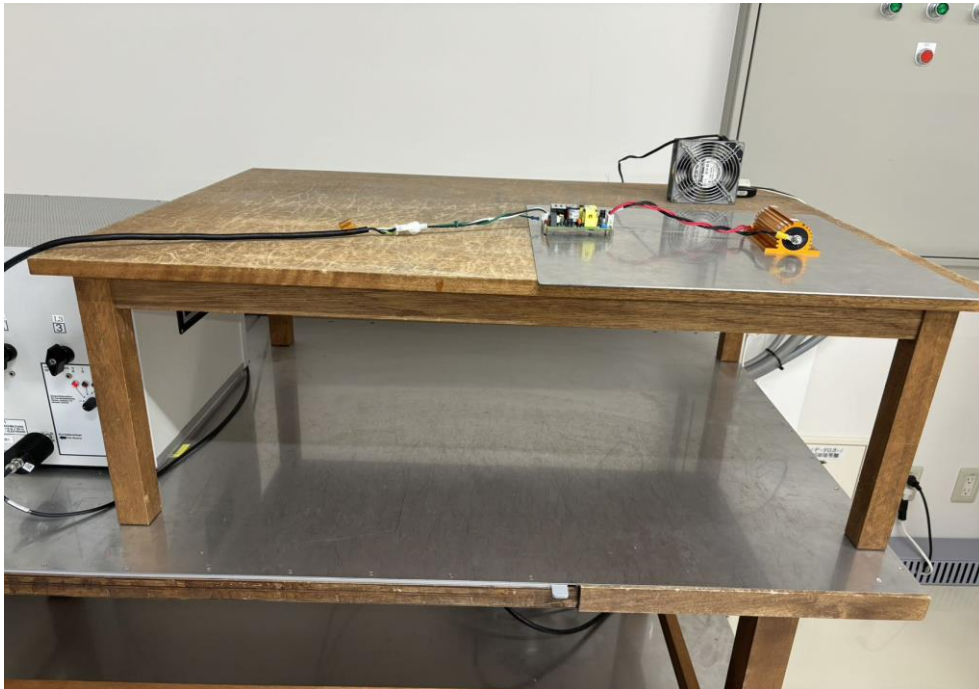

### 2. RADIATED EMISSION

