


UMA120F-48-SNY Expected Life : (Aluminum electrolytic capacitor)

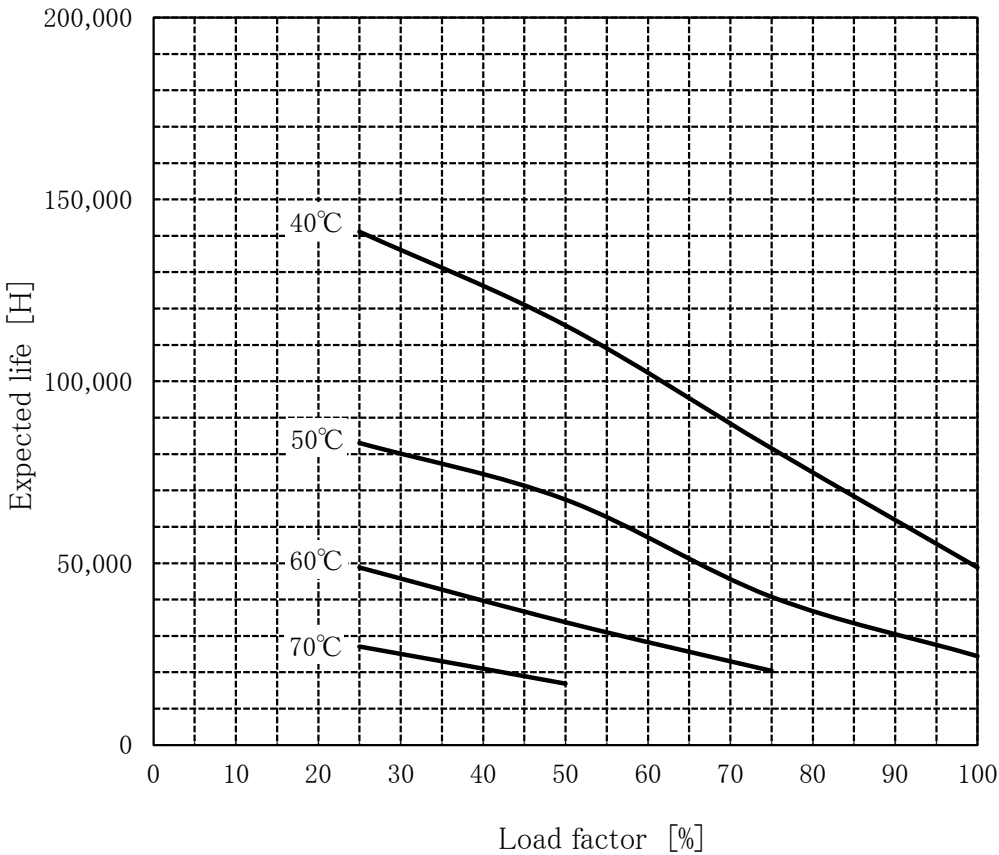


- Above expected life time is calculated according our calculation standard.
- Over the area of 100,000 hours, the degradation of sealing rubber, etc., is not included in the calculation.
- Please refer derating curve shown in instruction manual about the maximum value of ambient temperature.

Conditions

- (1)Input voltage                    AC100-264V    50Hz  
(2)Output voltage/  
   current

DC OUTPUT	Load factor			
	100%	75%	50%	25%
48V	2.50A	1.88A	1.25A	0.63A
—	—	—	—	—
—	—	—	—	—

- (3)Cooling method                Convection  
(4)Mounting method            Refer below

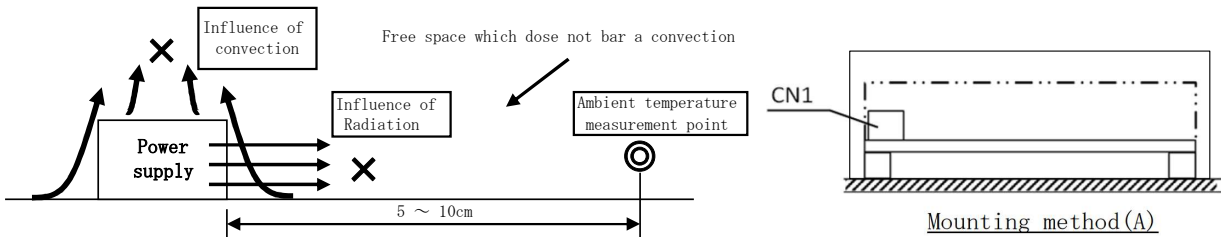

With the ambient temperature of graph, it measures in the enviroment of a figure.