



DATA SHEET		Date	26-Jun-25
Model	UMA120F-5-Y	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	Y.Sakai

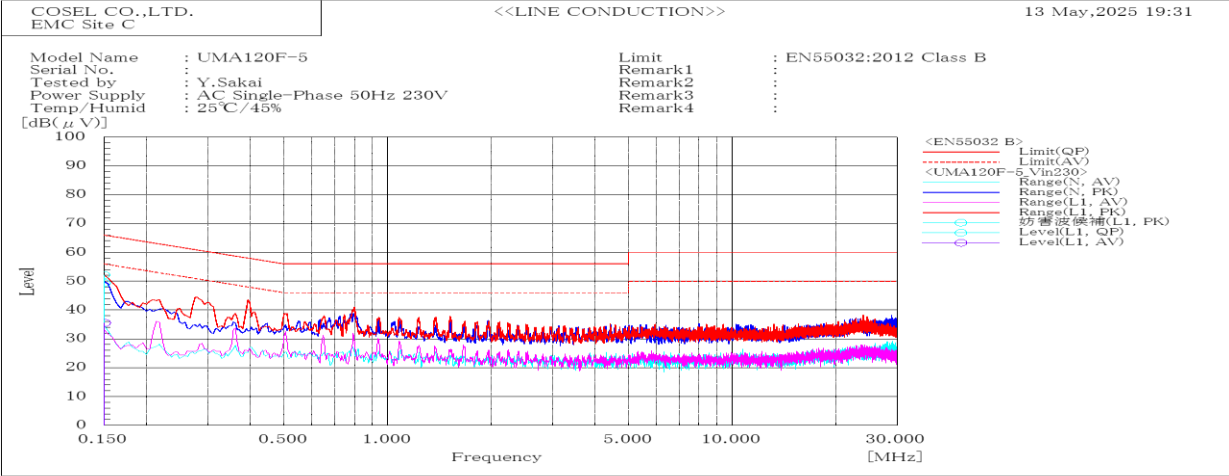


Frequency	Line	Level		Limit		Margin		Pass/Fail	Remark
MHz		dB(μV)		dB(μV)		dB			
		QP	AV	QP	AV	QP	AV		
0.151	L1	49.4	35.6	66	56	16.6	20.4	Pass	

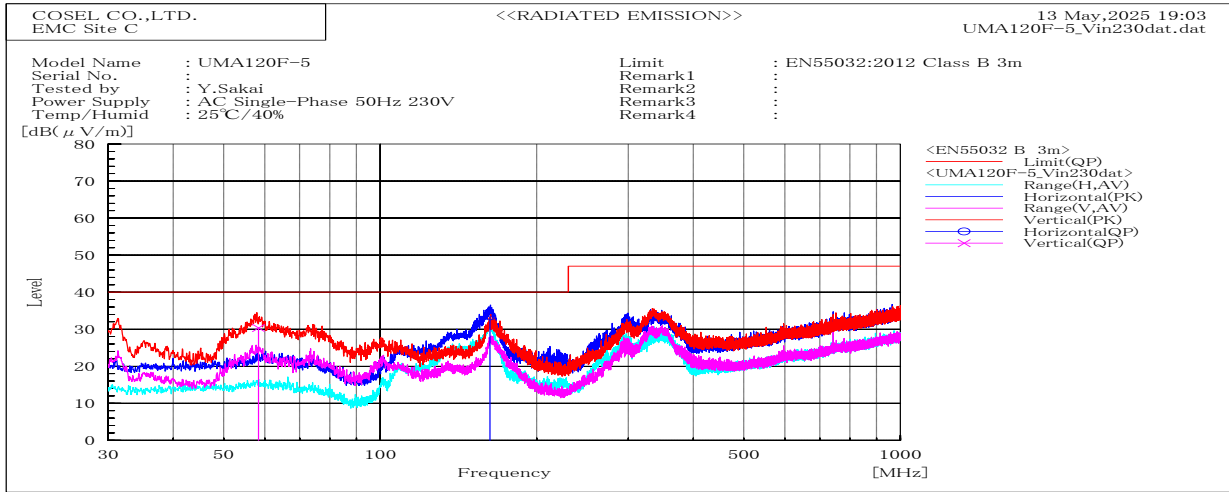


Frequency MHz	Polarization	Stability	Level	Limit	Margin	Pass/Fail	Height cm	Angle deg	Remark
			dB(uV/m) QP	dB(uV/m) QP	dB QP				
162.46	H	Stable	33.5	40	6.5	Pass	190	11.5	
58.328	V	Stable	30.4	40	9.6	Pass	100	243.9	

DATA SHEET		Date	26-Jun-25
Model	Circuit used for measurement	Temp.	25 degreeC
Test	EMI Line conduction & Radiated emission	Humid.	45 %RH
		Tested by	Y.Sakai

1. Line conduction

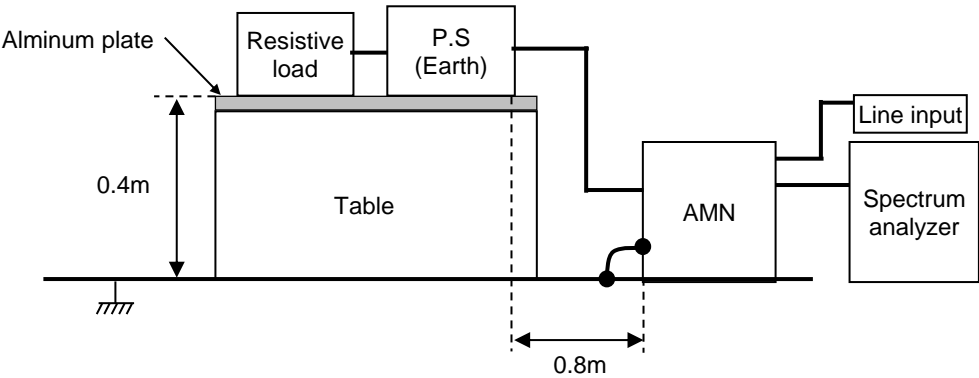

2. Radiated emission

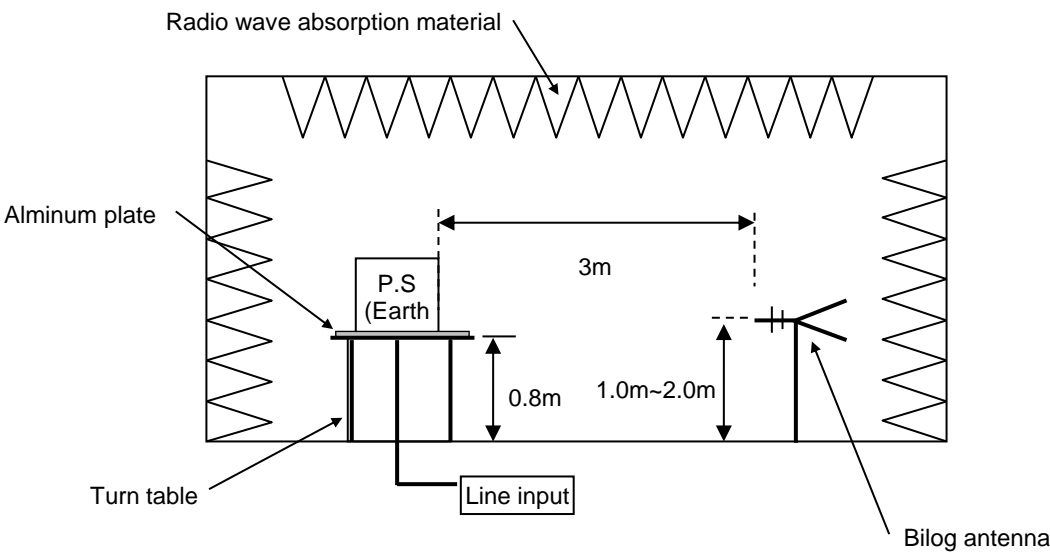


Conditions

Test : EMI
Model Name : UMA120F-5-Y

○Photographs of Test Set-Up

1. LINE CONDUCTION

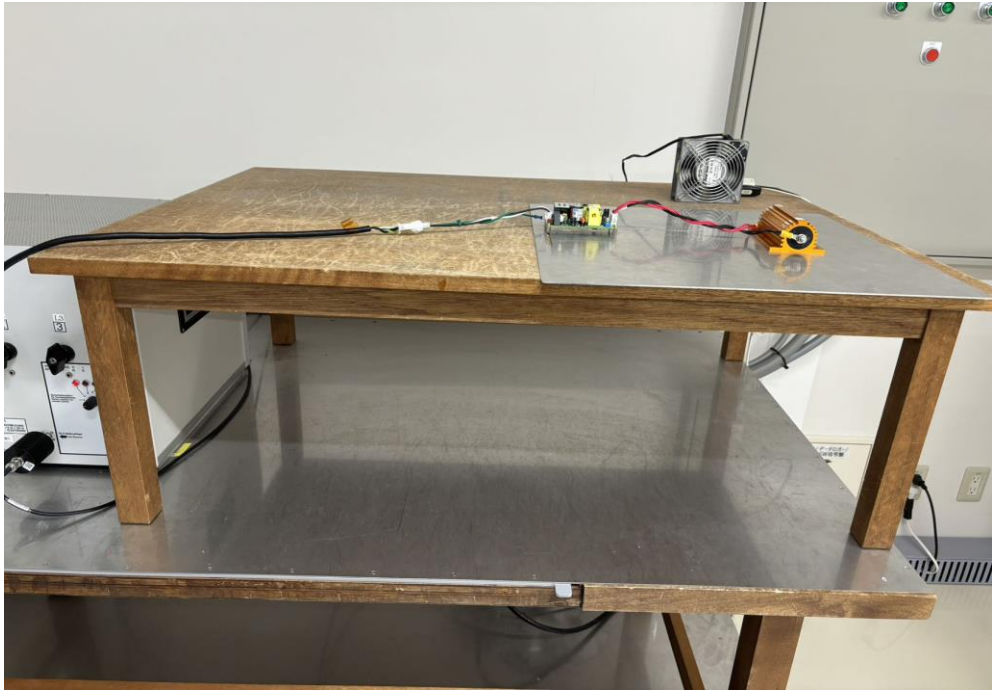

2. RADIATED EMISSION

